

# Initial Environmental Examination

---

Document Stage: Updated  
Project Number: 42267-031  
August 2021

India: Rajasthan Secondary Towns Development  
Sector Project – Sardarshahar Water Supply and  
Sewerage Subproject, District - Churu, Rajasthan

Part 1 of 3 (pages 1-249)

Prepared by Project Management Unit, Rajasthan Urban Drinking Water Sewerage and Infrastructure Corporation Limited, Government of Rajasthan for the Asian Development Bank. This is an updated version of the draft originally posted in March 2020 available on <https://www.adb.org/projects/documents/ind-42267-031-iee-3>.

## CURRENCY EQUIVALENTS

(as of 10 March 2020)

|               |   |                  |
|---------------|---|------------------|
| Currency unit | – | Indian Rupee (₹) |
| ₹1.00         | = | \$ 0.013434      |
| \$1.00        | = | ₹74.4370         |

## ABBREVIATIONS

|             |   |                                                                                                          |
|-------------|---|----------------------------------------------------------------------------------------------------------|
| ACM         | – | Asbestos containing Material                                                                             |
| ADB         | – | Asian Development Bank                                                                                   |
| BOCW        | – | Building and Other Construction Workers                                                                  |
| CGWB        | – | Central Ground Water Board                                                                               |
| CLC         | – | City Level Committee                                                                                     |
| CPCB        | – | Central Pollution Control Board                                                                          |
| CPHEEO      | – | Central Public Health and Environmental Engineering Organization                                         |
| CTE         | – | Consent to Establish                                                                                     |
| CTO         | – | Consent to Operate                                                                                       |
| CWR         | – | Clear Water Reservoir                                                                                    |
| DBO         | – | Design-Build-Operate                                                                                     |
| DPR         | – | Detailed Project Report                                                                                  |
| EHS         | – | Environmental Health and Safety                                                                          |
| EIA         | – | Environmental Impact Assessment                                                                          |
| EMP         | – | Environmental Management Plan                                                                            |
| FAO         | – | Food and Agricultural Organization                                                                       |
| FCO         | – | Fertilizer Control Ordinance                                                                             |
| FSSM        | – | Fecal Sludge and Septage Management                                                                      |
| GOI         | – | Government of India                                                                                      |
| GOR         | – | Government of Rajasthan                                                                                  |
| IEE         | – | Initial Environmental Examination                                                                        |
| IFC         | – | International Finance Corporation                                                                        |
| LPCD        | – | Liters per Capita per Day                                                                                |
| LSGD        | – | Local Self Government Department                                                                         |
| MLD         | – | Million Liters per Day                                                                                   |
| MOEFCC      | – | Ministry of Environment, Forest and Climate Change                                                       |
| O&M         |   | operation and maintenance                                                                                |
| OHSR        | – | Overhead Service Reservoir                                                                               |
| PHED        | – | Public Health Engineering Department                                                                     |
| PIU         | – | Project Implementation Unit                                                                              |
| PMU         | – | Project Management Unit                                                                                  |
| PWD         | – | Public Works Department                                                                                  |
| REA         | – | Rapid Environmental Assessment                                                                           |
| ROW         | – | Right of Way                                                                                             |
| RSPCB       | – | Rajasthan State Pollution Control Board                                                                  |
| RSTDSP      | – | Rajasthan Secondary Towns Development Sector Project                                                     |
| RUDSICO-EAP | – | Rajasthan Urban Drinking Water Sewerage and Infrastructure Corporation Limited-Externally Aided Projects |
| RUDSICO     | – | Rajasthan Urban Drinking Water Sewerage and Infrastructure Corporation                                   |
| SCADA       | – | Supervisory Control and Data Acquisition                                                                 |
| SBR         | – | Sequential Batch Reactor                                                                                 |

|       |   |                                                 |
|-------|---|-------------------------------------------------|
| SEIAA | – | State Environmental Impact Assessment Authority |
| SPS   | – | Safeguard Policy Statement, 2009                |
| STP   | – | Sewage Treatment Plant                          |
| TEER  | – | Treated Effluent Elevated Reservoir             |
| TESR  | – | Treated Effluent Storage Reservoir              |
| ULB   | – | Urban Local Body                                |
| WHO   | – | World Health Organization                       |
| WTP   | – | Water Treatment Plant                           |

## WEIGHTS AND MEASURES

|                |   |                           |
|----------------|---|---------------------------|
| °C             | – | degree centigrade         |
| dB             | – | Decibels                  |
| dia            | – | diameter                  |
| kg             | – | kilo gram                 |
| Kl             | – | kilolitre                 |
| km             | – | kilometre                 |
| kmph           | – | kilometre per hour        |
| ha             | – | hectare                   |
| LPCD           | – | liters per capita per day |
| lps            | – | liters per second         |
| m              | – | meter                     |
| m <sup>3</sup> | – | cubic meter               |
| mg             | – | milligram                 |
| mm             | – | millimeter                |
| mcm            | – | million cubic meter       |
| sq.km          | – | square kilometer          |

## NOTE

In this report, "\$" refers to United States dollars.

This updated initial environmental examination report is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, management, or staff, and may be preliminary in nature. Your attention is directed to the "terms of use" section on ADB's website.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.



## **CONTENTS**

|                                                                 |     |
|-----------------------------------------------------------------|-----|
| Executive Summary                                               | 1   |
| I. INTRODUCTION                                                 | 1   |
| A. Project Background                                           | 1   |
| B. Purpose of Initial Environmental Examination Report          | 2   |
| C. Report Structure                                             | 4   |
| II. DESCRIPTION OF THE PROJECT                                  | 5   |
| A. Sardarshahar Town                                            | 5   |
| B. Present Status of Water Supply and Sewerage                  | 5   |
| C. Subproject Components                                        | 11  |
| D. Subproject Benefits                                          | 15  |
| E. Implementation Schedule                                      | 16  |
| III. ANALYSIS OF ALTERNATIVES                                   | 42  |
| IV. POLICY, LEGAL AND ADMINISTRATIVE FRAMEWORK                  | 47  |
| A. ADB Policy                                                   | 47  |
| B. National Laws                                                | 50  |
| V. DESCRIPTION OF THE ENVIRONMENT                               | 63  |
| A. Physical Resources                                           | 63  |
| B. Ecological Resources                                         | 68  |
| C. Economic Development                                         | 69  |
| D. Infrastructure                                               | 70  |
| E. Physical Cultural Resources                                  | 72  |
| F. Environmental Settings of Investment Program Component Sites | 73  |
| VI. ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES   | 85  |
| A. Introduction                                                 | 85  |
| B. Pre-Construction Impacts – Design and Location               | 86  |
| C. Environmental Audit of Existing Water Supply Infrastructure  | 96  |
| D. Pre-construction Impacts                                     | 101 |
| E. Construction Impacts                                         | 102 |
| F. Operation and Maintenance Impacts                            | 113 |
| G. Cumulative Impacts                                           | 118 |
| VII. PUBLIC CONSULTATION AND INFORMATION DISCLOSURE             | 119 |
| A. Overview                                                     | 119 |
| B. Public Consultation                                          | 120 |
| C. Information Disclosure                                       | 122 |
| VIII. GRIEVANCE REDRESS MECHANISM                               | 123 |
| A. Project Specific Grievance Redress Mechanism                 | 123 |
| IX. Environmental Management Plan                               | 127 |
| A. Environmental Management Plan                                | 127 |
| B. Institutional Requirements                                   | 170 |
| C. Institutional Capacity and Development                       | 183 |
| D. Monitoring and Reporting                                     | 184 |
| E. EMP Implementation Cost                                      | 185 |
| X. CONCLUSION AND RECOMMENDATION                                | 187 |

## **APPENDICES**

|                                                                                |     |
|--------------------------------------------------------------------------------|-----|
| Appendix 1: Rapid Environmental Assessment (REA) Checklist                     | 192 |
| Appendix 2: Drinking water standards                                           | 204 |
| Appendix 3: Compliance with Environmental Criteria for Subproject Selection    | 205 |
| Appendix 4: Ambient Air Quality, Vehicle, Diesel Generator Emissions Standards | 211 |

|                                                                                                                                           |     |
|-------------------------------------------------------------------------------------------------------------------------------------------|-----|
| Appendix 5: Effluent Discharge Standards for STPs order by NGT 30.04.2019                                                                 | 215 |
| Appendix 6: Ambient Air Quality Standards in Respect of Noise                                                                             | 216 |
| Appendix 7: Extract from Construction and Demolition Management Rules, 2016                                                               | 218 |
| Appendix 8: Salient Features of Major Laws Applicable to Establishments Engaged in<br>Construction of Civil Works                         | 224 |
| Appendix 9: Groundwater Quality Test Reports                                                                                              | 228 |
| Appendix 10: Biodiversity Assessment - Sardarshahar                                                                                       | 234 |
| Appendix 11: Geographical position coordinates of all project sites                                                                       | 266 |
| Appendix 12: Sample chance find protocol                                                                                                  | 267 |
| Appendix 13: Salient features of the IGNP canal                                                                                           | 269 |
| Appendix 14: Surface Water Allocation Letter from PHED                                                                                    | 271 |
| Appendix 15: Feasibility report of tube wells                                                                                             |     |
| Appendix 16: Location details of tube wells                                                                                               | 275 |
| Appendix 17: Excerpts on reuse from Rajasthan state Sewerage and Wastewater Policy                                                        | 276 |
| Appendix 18: Guidelines for Sewerage System Operations, Reuse of Treated Effluent and<br>Sludge from STP for Beneficial Purposes          | 279 |
| Appendix 19: Preliminary audit note on existing facilities                                                                                | 283 |
| Appendix 20: Sample Asbestos containing material (ACM) Management Plan                                                                    | 309 |
| Appendix 21: Sample Outline Spoil Management Plan                                                                                         | 338 |
| Appendix 22: Sample Outline Traffic Management Plan                                                                                       | 339 |
| Appendix 23: IFC benchmark standards for workers accommodation                                                                            | 349 |
| Appendix 24: Guidelines and Emergency plan for handling and storing chlorine                                                              | 362 |
| Appendix 25: Details of Public Consultations                                                                                              | 371 |
| Appendix 26: Minutes of City level Stakeholder Committee (CLC) Meeting                                                                    | 381 |
| Appendix 27: Sample Grievance Registration Form                                                                                           | 388 |
| Appendix 28: Office order for establishing GRM                                                                                            | 389 |
| Appendix 29: Sample Environmental Site Inspection Checklist                                                                               | 392 |
| Appendix 30: Semi Annual Environmental Monitoring Report Format                                                                           | 394 |
| Appendix 31: Details of land availability, ownership and NOCs for sites                                                                   | 401 |
| Appendix 32: Agreement for provision of land and use of treated water by Gandhi Vidya Mandir                                              | 412 |
| Appendix 33: Agreement for provision of land for discharge and use of treated water by<br>Gaushala Samiti                                 | 413 |
| Appendix 34: No Objection Certificate (NOC) for discharge of treated water on Gaushala land<br>along with designed reuse plan of Gaushala | 416 |
| Appendix 35: Layout of CWR showing storage area for asbestos material                                                                     | 419 |
| Appendix 36: IND RSTDSP FFM Environment Action Items Post-Site Visits                                                                     | 420 |
| Appendix 37: WHO Interim Guidance on Water, Sanitation, Hygiene and Waste                                                                 | 421 |
| Appendix 38: Site Visit Report and Due Diligence for Ongoing Construction works in<br>Sardarshahar                                        | 427 |
| Appendix 39: Update Alignment Maps for Water supply and Sewerage Network                                                                  | 434 |
| Appendix 40: Environmental Monitoring Baseline Results and Locations in Sardarshahar                                                      | 436 |

## Executive Summary

Rajasthan Secondary Towns Development Sector Project (RSTDSP), the fourth phase of investment projects financed by Asian Development Bank (ADB) and implemented by the Rajasthan Urban Drinking Water Sewerage and Infrastructure Corporation Limited (RUDSICO), previously known as Rajasthan Urban Infrastructure Development Project (RUIDP). RSTDSP will support the ongoing efforts of the Government of Rajasthan (GOR) towards improving the water and wastewater services in about 14 towns<sup>1</sup>. RSTDSP seeks to improve WSS services in secondary towns with populations between 20,000-115,000 through a sector loan modality. The project is aligned with the following impact(s): access to potable, affordable, reliable, equitable, and environmentally sustainable drinking water supply in all urban areas of Rajasthan improved;<sup>2</sup> and health status of urban population, especially the poor and under-privileged improved.<sup>3</sup> The project will have the following outcome: urban service delivery in secondary towns of Rajasthan improved. There are three outputs.

Output 1: Water supply infrastructure in project towns improved with climate-resilient and inclusive features. By 2027: (i) about 1,350 kilometers of water supply pipelines will be commissioned through a district metered area approach for effective NRW management, (ii) about 100,000 households will be connected to an improved water supply system (including at least 95% BPL households) with 100% functional meters allowing for the introduction of volumetric billing, (iii) 3 new water treatment plants will be commissioned with total capacity of at least 28 million liters per day and (iv) 2 water treatment plants will be rehabilitated.

Output 2: Sanitation systems in project towns improved with climate-resilient, cost-effective and inclusive features.<sup>4</sup> By 2027: (i) about 1,300 kilometers of sewers will be constructed, (ii) 19 STPs with co-treatment of wastewater and fecal sludge and with a total capacity of about 80 million liters per day will be commissioned and 2 existing STPs will be upgraded to meet current effluent standards, (iii) about 103,000 new household connections (including at least 95% BPL households) to sewer system will be installed, (iv) 1 fecal sludge treatment plant with total 10 kilo liters per day capacity will be commissioned, and (v) agreements for reuse of wastewater mainly for industry or agriculture will be signed in at least 5 project ULBs.

Output 3: Institutional and human capacities strengthened for service improvements, gender equality and sustainability. Under the sector project: (i) at least 500 women will gain professional experience through an internship program at RUDSICO, (ii) about 500 staff and 500 elected representatives of project ULBs, including 80% of eligible women, will report increased knowledge on O&M of WSS services, CWIS, financial sustainability and GESI action plan implementation, (iii) about 500 girls will report enhanced knowledge in conducting water audits in schools and households, and (iv) data platforms will be established in all project towns.<sup>5</sup>

---

<sup>1</sup> Secondary towns under consideration are Abu Road, Banswara, Didwana, Fatehpur, Khetri, Kuchaman, Laxmangarh, Ladnu, Mandawa, Makrana, Pratapgarh, Ratangarh, Sardarshahar, and Sirohi

<sup>2</sup> Government of Rajasthan. 2018. *Rajasthan: Urban Water Supply Policy*. Jaipur.

<sup>3</sup> Government of Rajasthan. 2016. *State Sewerage and Waste Water Policy*. Jaipur.

<sup>4</sup> Climate resilient and inclusive features included are: improvements in the distribution system to reduce losses; rainfall water harvesting; energy-efficient pumps; solar panels at project facilities; pressure control mechanisms in the water system to help avoid losses through pipe bursts; and wastewater reuse for productive uses.

<sup>5</sup> Includes supervisory control and data acquisition system, hydraulic model, geographic information system, and

Sardarshahar town water supply and sewerage subproject is one of the subprojects designed under the investment component of Phase IV of RUDSICO. Recently, under the Urban Infrastructure Development Scheme for Small and Medium Towns (UIDSSMT) project; two STPs and 4 SPSs based on Waste Stabilization Pond (WSP) technology has been constructed in the town and core area of town is covered by sewerage networks and house connection is under progress by Municipal Council, but entire sewerage system is not fully operational. Therefore, most of the residential, commercial buildings and educational institutions are still dependent on septic tanks and soak pits. The effluent from the septic tanks directly drains into the open drains. This drainage is pumped to discharge in the outskirts low lying areas of the town. Therefore, sewerage system designed in the town along with existing sewerage system, will enhance environmental and sanitation conditions of the town and increase liveability conditions of residents.

Present source of water for Sardarshahar town is both groundwater as well as surface water. There are 45 tube wells/open wells within the town. Total water produced from these TW's is directly boosted to distribution system. Existing source of surface water for Sardarshahar Town is Sawarsat minor Canal of Indira Gandhi Nahar Pariyojana (IGNP). Presently water is supplied to consumers on daily basis for 2-4 hours. Gross water supply rate is around 100 litres per capita per day (LPCD) but water received at consumer end is about 80-85 LPCD only, which is less than standard of 135 LPCD. This is due to heavy losses reported in the existing distribution network (about 40-45%). As the distribution mains consists of about 92% of uPVC pipes laid almost 15 years ago, frequent bursting, leaking occurs, which leads to high percentage of NRW. The water distribution network is old, profusely leaking and is badly in need of rehabilitation and replacement. Designed water supply in the town will increase the supply rate to consumer up to CPHEEO standard rate and will reduce NRW in the town.

**Screening and assessment of potential impacts.** ADB requires consideration of environmental issues in all aspects of the Bank's operations, and the requirements for Environmental Assessment are described in ADB's SPS (2009). As per the Government of India environmental impact assessment (EIA) Notification, 2006, this subproject does not require EIA study or Environmental Clearance. The potential environmental impacts of the subproject have been assessed using ADB rapid environmental assessment (REA) checklist for Sewerage. The potential negative impacts were identified in relation to preconstruction, construction and operation phases. This Initial Environmental Examination (IEE) addresses the infrastructure components designed under Sardarshahar water supply and sewerage subproject.

Draft IEE of this subproject was prepared and approved by ADB based on feasibility/preliminary design, and included in bid and contract of this DBO package. Updated IEE reflecting the final subproject designs including any change in scope, locations etc., and the approval of the same by ADB is required prior to start of construction. Since the designs are being finalized zone/subzone / component wise, it is also planned to update IEE in stages to proceed with the construction of components for which designs are completed. This is the first updated IEE of this package, and reflects the updated designs of the subproject components. Currently under water supply networks 140.35 km out of total 193 km proposed; is approved (approx.. 72.72%), whereas under sewer networks 31.23 km out of total proposed 68 km is approved (approx. 45.92%). The revised and approved IEE will supersede the earlier version of IEE and shall be contractually binding on the contractor.

**Categorization.** Environmental assessment has been conducted for the Sardarshahar water supply and sewerage subprojects based on (i) preliminary detailed design, and (ii) most likely environmentally sensitive components. The environmental assessment used ADB's rapid environmental assessment (REA) checklists for sewerage works and water supply and "No Mitigation Scenario Checklist". The environmental assessment of the Sardarshahar water supply and sewerage subprojects are not likely to have any significant adverse environmental impacts that are irreversible, diverse, or unprecedented. Potential impacts are mostly site-specific and few of them are irreversible. In most cases mitigation measures can be designed with uncomplicated measures commonly used at construction sites and known to civil works contractors.

Sardarshahar water supply and sewerage subproject is classified as Environmental Category B as per the SPS as no significant impacts are envisaged. Accordingly, this Initial Environmental Examination (IEE) assesses the environmental impacts and provides mitigation and monitoring measures to ensure that there are no significant impacts as a result of the project.

**Water Supply:** It is designed to improve the water supply system in Sardarshahar under RSTDSP. This will benefit the total population of Sardarshahar 95911 (2011 Census) 1,55,980 by 2051 (projected) with a per capita water supply rate of 135 liters per day. Designed components include i) Construction of new CWR of 2400 KL and Clear Water Pump House at Hanumangarh Road H/w, (ii) Rehabilitation of OHSRs at Bairudan, Holidhora, Suryamandir, & Ramnagar, (iii) Rehabilitation of CWR of 4100 KL and Clear Water Pump House at Hanumangarh Road Headworks, (iv) water supply pipe for distribution networks- 193 Kms of different diameters and pipe materials: DI & HDPE (v) Construction of Consumer Relation and Management Centre- 2 nos., Central Control Centre- 1 no. and Master Control Centre- 1 no (vi) Consumer Connections- 22000 (viii) Rehabilitation of existing 26 tube/open wells.

**Sewerage:** It is designed to develop a comprehensive sewerage system in Sardarshahar town to collect, treat, and dispose/reuse the domestic wastewater safely. This is being provided in a combination of underground sewerage system including treatment facility, and Fecal Sludge and Septage Management (FSSM) system in areas that are not fully developed at present and not feasible to provide sewer network. Designed components include (i) Construction of 3 STPs of 2.30 MLD, 3.40 MLD & 1.60 MLD capacities with Treated Effluent Elevated Reservoir (TEER) and Up-gradation of existing (WSP) STP's of Capacities 5 MLD and 2 MLD, Treated Effluent Storage Reservoir (TESR), Effluent Pumping Station (EPS) for reuse of treated effluent (ii) 2 nos. of SPSs (0.65 MLD and 2.30 MLD capacity) (iii) Rising main- 2.1 Km (800 mt. For SPS of 200 mm DI K9 pipes and 1300 mt. For SPS of 350 mm DI K9 pipes) (iv) Sewer network of 68 km including 12.00 Km trenchless laying (v) Electrical and Mechanical works (vi) house sewer connections- 5600 (vii) FSSM one mobile tankers with suction and discharge arrangements of 1000 litre capacity and another one of 4000 litre capacity.

**Description of the Environment.** Subproject components are in Sardarshahar town of Churu district and in its immediate surroundings which were converted into urban use for many years ago, and there is no natural habitat left at these sites. The project sites are in Government lands (for structures) and in existing road right of way (ROW) for pipe laying. There are no protected areas, wetlands, mangroves, or estuaries in or near the project locations. Soils are deep, and do not require cutting of rocks for pipe laying. The climate of Sardarshahar is dry and hot in summers and cold in winters. Rainfall is low in Sardarshahar. As per the seismic zoning map of India, Sardarshahar located in low damage risk zone (Zone II). The area is less prone to earthquakes as it is located on relatively stable geological plains.

**Potential Environmental Impacts and Mitigation Measures.** In this draft IEE, negative impacts were identified in relation to location, design, construction and operation of the improved infrastructure. Environmental impacts as being due to the project design or location were not significant as various measures are already included in site planning and preliminary design. There are no environmentally or archeologically sensitive areas within Sardarshahar town. The town is mostly surrounded by agricultural areas, and there are no sensitive areas like forests.

Designed STPs sites are located away from habitations and surrounded by agricultural lands, therefore no impacts envisaged. Designed SBR technology is advanced, treats sewage in a compact aerobic process, therefore issue due to bad odour is minimal. It is designed to design the STPs to stringent discharge standards suggested by CPCB. Following the Rajasthan Sewerage and Wastewater Policy, 2016, treated effluent from STPs will be reused in various feasible purposes, and a Reuse plan will be prepared during the detailed design. Various measures are suggested for safe reuse of wastewater and sludge. Excess / surplus of treated effluent will be disposed into water channels/drains, which are either dry or carry untreated wastewater at present. No impacts envisaged.

Potential impacts during construction are considered significant but temporary and are common impacts of construction in urban areas, and there are well developed methods to mitigate the same. Except laying of sewer and water pipelines, all other construction activities will be confined to the selected sites and the interference with the general public and community around is minimal. In these works, the temporary negative impacts arise mainly from construction dust and noise, hauling of construction material, waste and equipment on local roads (traffic, dust, safety etc.), mining of construction material, occupational health and safety (OHS) aspects. Pipe and sewer laying works will be conducted along public roads in an urban area congested with people, activities and traffic. Therefore, these works may have adverse, but temporary impacts arising mainly from the disturbance of residents, businesses and traffic due to construction work; safety risk to workers, public and nearby buildings due to deep trench excavations in the road; access impediment to houses and business, disposal of large quantities of construction waste etc. These are all general impacts of construction in urban areas and there are well developed methods of mitigation that are suggested in the EMP. Trenchless method will be adopted for sewers deeper than 3.5 m and also at main road crossings in traffic areas.

Subproject includes rehabilitation of existing infrastructure like tube wells, pumping stations and OHSRs. Presence of asbestos containing material (ACM), mainly AC pipes in the existing infrastructure is the main concern. Asbestos is recognized as a cause of various diseases and is considered health hazard if inhaled. About 9,440 m of 100 to 200 mm dia of AC pipes removed from rural area of Sardarshahar are stored at PHED campus and around 5,000 m of AC pipes are laying in the ground. It is normal practice in Rajasthan that existing AC pipes are left as it is in the ground and new pipes will be laid in a new alignment. However, complete avoidance of handling and disposal of AC pipes may not be possible. Various measures are suggested including development and implementation of Asbestos Management Plan (AMP).

Once the new system is operating, the facilities will operate with routine maintenance, which should not affect the environment. Improved system operation will comply with the operation and maintenance manual and standard operating procedures to be developed for all the activities.

Potential impacts during operations are considered that relates to the Occupational Health and Safety requirements of operating STP such as the handling and maintenance of chemicals and testing and verification of treated effluent to environmental standards per Central Pollution Control Board. Sludge management should be compliant with the requirements of the Solid Waste Management Rule 2000 and its amendment. Other solid waste disposal should be at designated disposal sites. Dumping at vacant land is not allowed per Solid Waste Management Rule 2000 and its amendment.

**Environmental Management.** An Environmental Management Plan (EMP) has been developed to provide mitigation measures to reduce all negative impacts to acceptable levels, along with the delegation of responsibility to appropriate agency. Various design related measures are already included in the project design. During construction, the EMP includes mitigation measures such as (i) proper planning of sewer and water supply works to minimize the public inconvenience; (ii) barricading, dust suppression and control measures; (iii) traffic management measures for works along the roads and for hauling activities; (iv) provision of walkways and planks over trenches to ensure access will not be impeded; and (v) finding beneficial use of excavated materials to extent possible to reduce the disposal quantity. EMP will guide the environmentally-sound construction of the subproject. EMP includes a monitoring program to measure the effectiveness of EMP implementation and include observations on- and off-site, document checks, and interviews with workers and beneficiaries. A copy of the updated EMP/ SEMP shall always be kept on-site during the construction period. The EMP shall be made binding on all contractors operating on the site and will be included in the contractual clauses. Non-compliance with, or any deviation from, the conditions set out in this document shall constitute a failure in compliance. To monitor the operation stage performance, there will also be longer-term surveys to monitor raw and treated water quality, treatment efficiency of STP (raw and treated sewage quality), sludge at STPs. Mitigation and monitoring measures, along with the project agency responsible for such actions, form part of the Environmental Management Plan. The estimated implementation cost of the EMP is INR 31,328,464. This indicative cost includes INR 7,000,000 (USD 100,000) for asbestos management (identification, inventory, removal, transport, temporary storage, disposal/treatment, and overall supervision of contractor related to asbestos materials).

The draft IEE and EMP was included in the bid and contract documents to ensure compliance with the conditions set out in this document. The contractor has submitted to PIU, for review and approval, an updated EMP / site-specific environmental management plan (SEMP) including (i) designed sites/locations for construction work camps, storage areas, hauling roads, lay down areas, disposal areas for solid and hazardous wastes; (ii) specific mitigation measures following the approved EMP; and (iii) monitoring program as per EMP. No works can commence prior to approval of SEMP. A copy of the EMP/approved SEMP has been kept on site during the construction period.

**Implementation Arrangements.** Government of Rajasthan's Local Self Government Department (LSGD) acting through the Rajasthan Urban Drinking Water, Sewerage and Infrastructure Corporation (RUDSICO) is the Project Executing Agency. The project management unit (PMU) is housed in RUDSICO's division for externally aided projects (EAP). There are two Zonal Offices in Jaipur and Jodhpur, and project implementation units (PIUs) in each project town/Urban Local Body (ULB). PMU is responsible for submitting environmental assessment and monitoring reports to ADB, monitoring of safeguards compliance, addressing safeguards issues, providing support and guidance to PIUs. The PIUs are responsible for day-to-day monitoring of EMP implementation, information disclosure, consultations and other field-level activities. PMU has appointed a Project Officer for Environment and each PIU deputed an

Safeguard Safety Officers (SSOs). The PMU Environment Project Officer is being assisted by specialists from Project Management and Capacity Building Consultants (PMCBC) and Construction Management and Supervision Consultants (CMSC).

**Consultation, Disclosure and Grievance Redress.** The stakeholders were involved in developing the IEE through discussions on-site and a public consultation workshop at city level, after which views expressed were incorporated into the IEE and in the planning and development of the project. Apart from on-site public consultations, a stakeholder meeting of City Level Committee (CLC) was held and CLC has appreciated and approved the subproject. The IEE will be made available at public locations, the Draft IEE was disclosed and this updated IEE will also be disclosed to a wider audience via the ADB and RUDSICO websites. The consultation process will be continued and expanded during project implementation to ensure that stakeholders are fully engaged in the project and can participate in its development and implementation. A grievance redress mechanism (GRM) is described within the IEE to ensure any public grievances are addressed quickly.

**Monitoring and Reporting.** The PMU, PIU and consultants will be responsible for monitoring and reporting. During construction, results from internal monitoring by the DBO contractor will be reflected in their monthly EMP implementation reports to the PIU. PIU with the assistance of CMSC, will monitor the compliance of Contractor, prepare a quarterly environmental monitoring report (QEMR) and submit to PMU. The PMU will oversee the implementation and compliance and will submit Semi-Annual Environmental Monitoring Reports (SEMR) to ADB. ADB will post the environmental monitoring reports on its website. Monitoring reports will also be posted RUDSICO-EAP/PMU websites.

**Conclusions.** The citizens of the Sardarshahar will be the major beneficiaries. The subproject is primarily designed to improve environmental quality and living conditions of Sardarshahar town through provision of water supply and sewerage. The benefits arising from this subproject include: (i) increased availability of potable water at appropriate pressure to all households including urban poor; (ii) reduced time and costs in accessing alternative sources of water. (iii) better public health particularly reduction in waterborne and infectious diseases; (iv) reduced risk of groundwater contamination; (v) reduced risk of contamination of treated water supplies; and, (vi) reduced dependence on fresh water resource due to reuse of treated wastewater, and (vi) improvement in quality of water bodies due to disposal of treated effluent meeting disposal standards.

The subproject is unlikely to cause significant adverse impacts. The potential impacts that are associated with design, construction and operation can be mitigated to standard levels without difficulty through proper engineering design and the incorporation or application of recommended mitigation measures and procedures. Based on the findings of the IEE, there are no significant impacts and the classification of the project as Category "B" is confirmed. The subproject is not covered by the GoI EIA Notification (2006).

**Recommendations:** Followings are the recommendation based on findings of draft IEE.

**Recommendations already Implemented with this update:**

- Include this IEE in bid and contract documents;- implemented, the ADB approved Draft IEE is part of bid documents
- induction to the contractor upon award of contract;- safeguard induction done
- Ensure contractor appointed qualified environment, health and safety (EHS) officers prior to start of works;- complied



- Involvement of contractors, including subcontractors, in first level GRM;- complied
- Conduct safeguards induction to the contractor upon award of contract
- Obtain all statutory clearances at the earliest time possible and ensure conditions/provisions are incorporated in the detailed design;- being implemented, consent to establish for WTP and STP already applied.
- Update/revise this IEE based on detailed design and/or if there are unanticipated impacts, change in scope, alignment, or location;- IEE is updated as per current design updates, further it will be updated in final IEE.
- Strictly supervise EMP implementation;- being complied
- Documentation and reporting on a regular basis as indicated in the IEE;- being complied
- Continuous consultations with stakeholders;- being complied
- Timely disclosure of information and establishment of GRM;- being implemented
- Commitment from PMU, PIUs, project consultants, and contractors to protect the environment and the people from any impact during project implementation.- PMU, PIUs and consultants are committed for the protection of environment

Recommendation to be implemented in next update /final IEE

- Ensure that sludge management protocols are compliant with environmental regulations (Solid Waste Management Rules 2000 and its amendments) and solid waste disposal should have a designated site (dumping on vacant lot is not allowed);- sludge management plan will be prepared, solid waste management plan is prepared and being implemented
- Update and implement the asbestos management plan per site-specific conditions;- currently no work are undergoing at sites, where ACMs can be encountered, ACM management plan shall be updated and included in final IEE
- Update and implement the recommendations from the biodiversity assessment report;- shall be updated and included in final IEE
- Secure permits for the abstraction of groundwater from additional wells;- shall be applied before establishment of Tube Wells



## I. INTRODUCTION

### A. Project Background

1. Rajasthan Secondary Towns Development Sector Project (RSTDSP), the fourth phase of investment projects financed by Asian Development Bank (ADB) and implemented by the Rajasthan Urban Drinking Water Sewerage and Infrastructure Corporation Limited (RUDSICO), previously known as Rajasthan Urban Infrastructure Development Project (RUIDP). RSTDSP will support the ongoing efforts of the Government of Rajasthan (GOR) towards improving the water and wastewater services in about 14 towns<sup>6</sup>. RSTDSP seeks to improve WSS services in secondary towns with populations between 20,000-115,000 through a sector loan modality. The project is aligned with the following impact(s): access to potable, affordable, reliable, equitable, and environmentally sustainable drinking water supply in all urban areas of Rajasthan improved;<sup>7</sup> and health status of urban population, especially the poor and under-privileged improved.<sup>8</sup> The project will have the following outcome: urban service delivery in secondary towns of Rajasthan improved. There are three outputs.

- (i) Output 1: Water supply infrastructure in project towns improved with climate-resilient and inclusive features. By 2027: (i) about 1,350 kilometers of water supply pipelines will be commissioned through a district metered area approach for effective NRW management, (ii) about 100,000 households will be connected to an improved water supply system (including at least 95% BPL households) with 100% functional meters allowing for the introduction of volumetric billing, (iii) 3 new water treatment plants will be commissioned with total capacity of at least 28 million liters per day and (iv) 2 water treatment plants will be rehabilitated.
- (ii) Output 2: Sanitation systems in project towns improved with climate-resilient, cost-effective and inclusive features.<sup>9</sup> By 2027: (i) about 1,300 kilometers of sewers will be constructed, (ii) 19 STPs with co-treatment of wastewater and fecal sludge and with a total capacity of about 80 million liters per day will be commissioned and 2 existing STPs will be upgraded to meet current effluent standards, (iii) about 103,000 new household connections (including at least 95% BPL households) to sewer system will be installed, (iv) 1 fecal sludge treatment plant with total 10 kilo liters per day capacity will be commissioned, and (v) agreements for reuse of wastewater mainly for industry or agriculture will be signed in at least 5 project ULBs.
- (iii) Output 3: Institutional and human capacities strengthened for service improvements, gender equality and sustainability. Under the sector project: (i) at least 500 women will gain professional experience through an internship program at RUDSICO, (ii) about 500 staff and 500 elected representatives of project ULBs, including 80% of eligible women, will report increased knowledge on O&M

---

<sup>6</sup> Secondary towns under consideration are Abu Road, Banswara, Didwana, Fatehpur, Khetri, Kuchaman, Laxmangarh, Ladnu, Mandawa, Makrana, Pratapgarh, Ratangarh, Sardarshahar, and Sirohi

<sup>7</sup> Government of Rajasthan. 2018. *Rajasthan: Urban Water Supply Policy*. Jaipur.

<sup>8</sup> Government of Rajasthan. 2016. *State Sewerage and Waste Water Policy*. Jaipur.

<sup>9</sup> Climate resilient and inclusive features included are: improvements in the distribution system to reduce losses; rainfall water harvesting; energy-efficient pumps; solar panels at project facilities; pressure control mechanisms in the water system to help avoid losses through pipe bursts; and wastewater reuse for productive uses.

of WSS services, CWIS, financial sustainability and GESI action plan implementation, (iii) about 500 girls will report enhanced knowledge in conducting water audits in schools and households, and (iv) data platforms will be established in all project towns.<sup>10</sup>

2. A series of subprojects will be implemented under the Project, with each subproject providing improvements to water supply or sanitation (on-site and off-site) or both in a project town. Sardarshahar Town water supply and sewerage subproject is one of the subprojects designed under RSTDSP. Water supply is currently intermittent and suffers with huge losses and quality issues. At present no proper sewerage system exists in the town. Most of the households depend on septic tanks for disposal of sewage. Effluent from septic tanks and sullage water is let off into open drains which ultimately collect in low lying areas and natural drains in the outskirts of the town. It is therefore designed to improve water supply and sanitation in the town. For sanitation, sewerage will be limited to the core areas and fecal sludge management will be improved for areas not served by sewers. ADB requires the consideration of environmental issues in all aspects of the Bank's operations, and the requirements for environmental assessment are described in ADB's Safeguards Policy Statement (2009). Accordingly, this Initial Environmental Examination (IEE) has been conducted to assess the environmental impacts and provide mitigation and monitoring measures to ensure that there are no significant impacts because of the subproject.

## **B. Purpose of Initial Environmental Examination Report**

3. ADB requires the consideration of environmental issues in all aspects of the Bank's operations, and the requirements for environmental assessment are described in ADB's Safeguard Policy Statement (SPS), 2009. The potential environmental impacts of the subproject have been assessed using ADB Rapid Environmental Assessment (REA) Checklist for Water Supply and sewerage treatment (Appendix 1). Then potential negative impacts were identified in relation to pre-construction, construction and operation of the improved infrastructure, and results of the assessment show that the subproject is unlikely to cause significant adverse impacts. Thus, this initial environmental examination (IEE) has been prepared in accordance with ADB SPS requirements for environment category B projects.

4. The Sardarshahar water supply and sewerage subproject is designed for implementation under the design-build-operate (DBO) modality, where in which the design is carried out by the selected bidder based on the feasibility / preliminary project report prepared prior to bidding. Thus, this IEE is based on the preliminary project report prepared by RUDSICO-EAP (PMU). The IEE was based mainly on field reconnaissance surveys and secondary sources of information. No field monitoring (environmental) survey was conducted, however, the environmental monitoring program developed as part of the environmental management plan (EMP) will require the contractors to establish the baseline environmental conditions prior to commencement of civil works. The results will be reported as part of the environmental monitoring report and will be the basis to ensure no degradation will happen during subproject implementation. Stakeholder consultation was an integral part of the IEE.

---

<sup>10</sup> Includes supervisory control and data acquisition system, hydraulic model, geographic information system, and drinking water and treated wastewater quality monitoring system.

5. Draft IEE of this subproject was prepared and approved by ADB based on feasibility/preliminary design, and included in bid and contract document of this DBO package. Updated IEE reflecting the final subproject designs including any change in scope, locations etc., and the approval of the same by ADB is required prior to start of construction. Since the designs are being finalized zone/subzone / component wise, it is also planned to update IEE in stages to proceed with the construction of components for which designs are completed. This is the first updated IEE of this package, and reflects the final designs of the components as per table 1. Currently under water supply networks 140.35 km out of total 193 km proposed; is approved (approx.. 72.72%), whereas under sewer networks 31.23 km out of total proposed 68 km is approved (approx. 45.92%). The revised and approved IEE will supersede the earlier version of IEE and shall be contractually binding on the contractor.

**Table 1: Subproject Scope, Components, status of detailed design, and changes – up to December 2020**

| Components / scope of works<br>as per the Draft IEE                                                                         | Components completed detailed<br>design |                                              | Change in<br>scope,<br>design | Change in<br>location                                 |
|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|----------------------------------------------|-------------------------------|-------------------------------------------------------|
|                                                                                                                             | Current IEE<br>update                   | Cumulative<br>(including this IEE<br>update) |                               |                                                       |
| <b>Water Supply</b>                                                                                                         |                                         |                                              |                               |                                                       |
| 2400 KL CWR with one new Pump House – 1 no                                                                                  |                                         |                                              |                               | Location<br>Changed<br>within existing<br>PHED campus |
| Rehabilitation of Existing 4100 KLCWR and Clear Water Pump House – 1 no                                                     |                                         |                                              |                               |                                                       |
| Rehabilitation of Existing OHSRs – 4 nos                                                                                    |                                         |                                              |                               |                                                       |
| Rehabilitation of existing Tube/open Wells -26 nos                                                                          |                                         |                                              |                               |                                                       |
| Chlorinator system - 1 New                                                                                                  |                                         |                                              |                               |                                                       |
| Water supply distribution networks - 193 km with 22000 Consumer Connections.                                                | 140350 meters in zone 1 &4              | 140350 meters in zone 1 &4                   | None                          | None                                                  |
| Consumer Relation Management Centers (CRMC) – 2 no.<br>Central Control Centre (CCC) – 1 no.<br>Master Control Centre- 1 no. |                                         |                                              |                               | Location<br>Changed<br>within existing<br>PHED campus |
| <b>Sewerage Works</b>                                                                                                       |                                         |                                              |                               |                                                       |
| STPs – new 3 nos and upgradation of 2 existing STPs                                                                         |                                         |                                              |                               |                                                       |
| Treated wastewater storage tanks -1<br>Treated effluent storage reservoir (TESR) - 3                                        |                                         |                                              |                               |                                                       |

|                                                                                                                 |                     |                     |      |      |
|-----------------------------------------------------------------------------------------------------------------|---------------------|---------------------|------|------|
| Treated Effluent Elevated Reservoir (TEER) - 3                                                                  |                     |                     |      |      |
| Sewage Pumping Station (SPS) – 2nos                                                                             |                     |                     |      |      |
| Rising Mains for SPSs 2100m.                                                                                    |                     |                     |      |      |
| Sewer Networks - 68 km including 12.00 Km trenchless laying and 5600 nos house sewer connection                 | 31230 m in zone 3&4 | 31230 m in zone 3&4 | None | None |
| FSSM - (two truck mounted mobile desludging equipment, one with 4000 liters and another with 1000 L capacity)). |                     |                     |      |      |

6. The implementation of the subprojects will be governed by Government of India and Rajasthan and other applicable environmental acts, rules, regulations, and standards. Environmental safeguards will be followed in accordance with the ADB SPS 2009. During the design, construction, and operation of the project the borrower/client will apply pollution prevention and control technologies and practices consistent with international good practice, as reflected in internationally recognized standards.

### C. Report Structure

7. This Report contains the following eleven (11) sections including the executive summary at the beginning of the report:

- (i) Executive Summary
- (ii) Introduction
- (iii) Description of the Project
- (iv) Analysis of alternatives
- (v) Policy, Legal and Administrative Framework
- (vi) Description of the Environment
- (vii) Anticipated Environmental Impacts and Mitigation Measures
- (viii) Public consultation and information disclosure
- (ix) Grievance Redress Mechanism
- (x) Environmental management plan
- (xi) Conclusions and Recommendations

## II. DESCRIPTION OF THE PROJECT

### A. Sardarshahar Town

8. Sardarshahar is one of the project towns selected for implementation of the ADB-funded Rajasthan Secondary Towns Development Sector Project (RSTDSP). Under the investment component it is designed to improve the water supply and sewerage system in the Town. Sardarshahar city has the administrative headquarters in Churu district, in the Northern part of Rajasthan. Geographically It is situated at 74°27' Longitudinal east and 28°26' latitude North. Spread over an area of 2473 acre, divided into 40 municipal wards, and has a population of 95,911 (2011 census). Urban local body is Nagar Palika, Sardarshahar.

### B. Present Status of Water Supply and Sewerage

9. **Water Supply:** Potable water for the Sardarshahar city is available from two main sources i.e. Groundwater source (Tube wells) and Surface water of IGNP through Sahwa lift canal.

10. **Groundwater source:** Currently, tube wells also play a role in Sardarshahar water supply system which is situated in the city limits. There are 45 tube wells/open wells harnessed with individual production of 225-300 LPM (10.00 MLD approx.). Average depth of these tube wells is 200 M and the general water table in the area is 41 M. Total water produced from these TW's is directly boosted to distribution system for non-drinking purposes.

11. **Surface water Source:** Main Source of Sardarshahar town water supply is Indira Gandhi water canal under Indira Gandhi Nahar Project (IGNP) from thereon Sahwa lift Canal emanate which is used to feed water to the existing WTP of 70 MLD capacity at Dhannasar (Dhannasar Water Treatment Plant). Salient features of IGNP is provided in Appendix 13.

12. **Water Treatment Plant:** Raw Water from canal treated at existing WTP of 70 MLD capacity at Dhannasar (Dhannasar Water Treatment Plant). Dhannasar WTP is part of AAPNI Yojna Asia's largest rural drinking water supply project. Also under the Phase II Aapni Yojna, there is a provision for the construction of new 160 MLD WTP at the same premises.

13. **Transmission Mains:** Currently from Dhannasar WTP water is being fed to Sardarshahar CWR with intermediate Pumping Station at Palloo and Sadasar by 1100 dia PSC pipeline, from CWR at Sardarshahar, water is being fed to 4 OHSR's of varying capacity which supplies water to the Distribution system of Sardarshahar. Water from Clear Water Reservoirs at Hanumangarh road headworks is being pumping to various OHSRs through DI transmission of various size. The present condition of laid DI pipeline is OK and satisfactory.

14. **Distribution System in the City:** The Existing Distribution System is of uPVC and AC make, from the OHSR Pipeline of Size 350mm-300mm emanates which reduces to 250mm and subsequently branches to 140mm and from thereon to 110mm and 90 mm respectively for House Connections. The Existing Distribution system consist of six(6) zones, Zone I to 4 are being fed from the Existing four OHSR's while it is designed to supply Zone-5,6 from the newly constructed OHSR's located at Zone-05 & Zone-06, and Zone-7 is to be supplied from newly constructed CWR at Hanumangar Road. Most of the uPVC lines are being laid in between 2001 to 2003 and designed on the basis of 100 LPCD. Existing AC pipes are old and considered as

possible source of leakages. The total length of existing distribution system is reported to be about 156. km which consists of AC and uPVC pipes of sizes varying from 80 to 350 mm diameter.

15. **Present Per Capita Water Supply:** Currently 11-12 MLD clear water taken from CWR as the existing system designed based on 100LPCD Present service level of Sardarshahar town is 90-100 LPCD. As per the discussion with line agency, present NRW level may be around 35-40%.

16. **Sewerage:** At present, the town does not have functional underground sewerage system. The municipal drains are mostly open causing problem in rainy season. Presently sewerage from the city flows into several small drains. Present drainage system is based on eleven ginanis/ sump-wells. Each ginani has its own contributory area where house drainage and storm water are collected through combined Drains. The disposal from ginani located in the North of the Town numbered as 1 to 4 in the town map is done by pumping the wastewater towards outer low-lying area of Northern side. Likewise, remaining ginani are interconnected to ginani no. 10 from where wastewater is finally pumped to low lying area in south-west of the town. Normally pumping is done almost 4 to 6 hrs a day from each ginani. For this, separate stand by pumps and D.G sets are provided.

17. Sewer is laid under UIDSSMT project currently in Sardarshahar. Presently 4 sewerage pumping stations and 2 STP's based on WSP (Waste Stabilisation Ponds) technology are constructed but not functional, which when connected to the sewer system will cater to the demand up to the intermediate year 2025 as per the designed Detailed report prepared under UIDSSMT. According to which, 155.96 km sewer Lines are supposed to be laid under Phase-I and II of the schemes. Out of 155.96 Km of sewer Line, 109 km has already been laid, the remaining line along with the other areas not covered under the existing scheme is to be connected under the present RUDSICO-EAP Phase-IV scheme. Presently 4 no of Sewage Pumping Stations exist in town. Two WSP process based STP's of 2 MLD and 5 MLD are constructed for Sardarshahar Town, STP was designed to confirm to effluent quality standard as per applicable standards at that time as : BOD < 100mg/l, COD < 250mg/l and SS < 100mg/l. Sewer lines are completed in most of the core area of town and some area of core zone and other outer areas are still not covered.

### **Designed water supply and sewerage Infrastructure in Sardarshahar under RSTDSP**

18. Water Supply Works. As described above, the existing water supply system in Sardarshahar suffers from various issues and resulting inadequate and intermittent supply. It is designed to improve the water supply system in Sardarshahar under RSTDSP to meet the following objectives:

- (i) The Subproject will benefit the total population of Sardarshahar - currently 95,911 (based on 2011 Census) and estimated to increase to 1,55,980 by 2051;
- (ii) Increase in per capita water supply availability for the residents of Sardarshahar from 90-100 lpcd to 135 lpcd;
- (iii) To establish continuous pressurized water supply system to consumers with quality and quantity at required pressure.
- (iv) To establish raw water intake and water treatment to reliably supply the specified quantity and quality of water.
- (v) To adopt energy efficient water treatment processes and electromechanical machinery.



- (vi) To reduce NRW as per performance indicators using district metering areas (DMA) approach.
- (vii) To ensure 100 % house service connections with metering for water supply.
- (viii) To ensure sustainability of the project by implementing a comprehensive asset management plan focusing on an integrated approach to operation and maintenance to minimize lifecycle costs.

19. **Water Demand and Supply.** Potable water for the Sardarshahar city is available from two main sources i.e. Groundwater source (Tube wells) and Surface water of IGNP through Sahwa lift canal. Existing source of surface water for Sardarshahar Town is Sahwa lift Canal of IGNP (Indira Gandhi Nahar Pariyojana). Raw Water from canal treated at WTP of 70 MLD capacity at Dhannasar (Dhannasar Water Treatment Plant) will be available for this project (Letter of Water Allocation for designed Water Supply Work is given in Appendix 14). Overall drinking water supply requirements are as follows:

**Table 2: Population and Water Demand and Water Availability (MLD)**

| Year | Stage             | Population | Consumer End Water Demand (MLD) | Water Demand (MLD) | Surface Water at Hanumangarh Road H/W (MLD)* | Ground Water (MLD) |
|------|-------------------|------------|---------------------------------|--------------------|----------------------------------------------|--------------------|
| 2021 | Base Year         | 1,09,830   | 14.80                           | 17.90              | 12.0                                         | 5.90               |
| 2036 | Intermediate Year | 1,32,070   | 17.80                           | 21.40              | 16.0                                         | 5.40               |
| 2051 | Ultimate Year     | 1,55,980   | 21.10                           | 25.20              | 16.0                                         | 9.20               |

20. Sardarshahar is within 'Safe' category in terms of Groundwater withdrawal. Fluoride in groundwater of this region is high mainly due to dissolution from fluoride-bearing minerals like hornblende and illite. X-ray diffraction study of the soil samples from this region states that apart from the causative minerals mentioned above, presence of calcite and dolomite may also have accelerated the leaching of fluoride to the groundwater. The arid climate with high evaporation and insignificant natural recharge might have accelerated the strengthening of fluoride concentration in the groundwater of this area. Ground water quality test report are attached in appendix 9.

21. Depth of groundwater table in Sardarshahar is Min. 10 and maximum 87 m in pre-monsoon and minimum 2 m and maximum 20m in post-monsoon. Ground Water Quality monitoring is being conducted by PHED in existing tube wells situated in Sardarshahar town used for water supply in town. Results of 2 samples of this test report are discussed in Table 4 of this report shoes Fluoride is above the permissible limit of 1.5mg/l in both the samples. Blending of TWs Water and Surface Water shows that fluoride content is below the permissible limit after blending. The feasibility report of tube wells is provided in Appendix 15.

22. **Water Distribution.** The Existing Distribution System is of uPVC and AC make, from the OHSR pipeline of Size 350mm-300mm emanates which reduces to 250 mm and subsequently branches to 140 mm and from thereon to 110 mm and 90 mm respectively for House Connections. The Existing Distribution system consist of six(6) zones, Zone I to 4 are being fed from the Existing four OHSR's while it is designed to supply Zone-5, 6 from the newly constructed OHSR's located at Zone-05 & Zone-06, and Zone-7 is to be supplied from newly constructed CWR at Hanumangar Road.

**Table 3: Blending of TWs Water and Surface Water**

| Year | Water from Canal | Tubewell water | No of low fluoride tube wells | Fluoride content after blending | Permissible limit |
|------|------------------|----------------|-------------------------------|---------------------------------|-------------------|
|      | MLD              | MLD            | nos.                          | ppm                             | ppm               |
| 2021 | 16               | 1.92           | 5.0                           | 0.982                           | 1.5               |
| 2022 | 16               | 2.14           | 6.0                           | 1.032                           | 1.5               |
| 2023 | 16               | 2.37           | 7.0                           | 1.081                           | 1.5               |
| 2024 | 16               | 2.60           | 7.0                           | 1.129                           | 1.5               |
| 2025 | 16               | 2.83           | 8.0                           | 1.177                           | 1.5               |
| 2026 | 16               | 3.06           | 9.0                           | 1.223                           | 1.5               |
| 2027 | 16               | 3.29           | 9.0                           | 1.268                           | 1.5               |
| 2028 | 16               | 3.53           | 10.0                          | 1.313                           | 1.5               |
| 2029 | 16               | 3.76           | 10.0                          | 1.356                           | 1.5               |
| 2030 | 16               | 4.00           | 11.0                          | 1.399                           | 1.5               |
| 2031 | 16               | 4.23           | 12.0                          | 1.442                           | 1.5               |

23. Most of the uPVC lines are being laid in between 2001 to 2003 and designed on the basis of 100 lpcd. Existing AC pipes are old and are considered to be possible source of leakages. The total length of existing distribution system is reported to be about 156. km which consists of AC and uPVC pipes of sizes varying from 80 to 350 mm diameter. The supply interval is also varying from 2-3 hours 2 times a day. But most of the wards also have bore-wells directly connected to their distribution system which presents a challenge and makes the distribution system much more complicated.

24. **Operation and maintenance (O&M) of water supply system.** The DBO contractor will operate and maintain the system for a period of 10 years after completion of construction and commissioning the new / improved system. This will include the following:

- (i) Drawing water from CWR/TWs to OHSRs/CWRs including water pumping main and Maintenance of entire underground water system;
- (ii) Operating & maintaining all the Clear/TW Water pumping stations to fill all the CWRs/OHSRs through transmission/pumping pipelines and operation of chlorination system, maintenance of complete system including maintaining the infrastructure and specified Water levels at each of the reservoirs throughout the O&M period;
- (iii) Managing the distribution network for distributing water efficiently, equitably and minimizing non-revenue water (NRW) and maintaining the infrastructure on DMA basis in the distribution network;
- (iv) Providing continuous pressurized water supply with improvement in level of service on continuous basis to the connected consumers and maintaining the infrastructure while meeting the performance indicators. A minimum of 12mwatercolumnpressureshallbemaintainedatall ferrule points, but it shall not exceed the maximum allowable pressure;
- (v) Meter reading, customer services and maintaining the infrastructure in water supply
- (vi) Meter reading, bimonthly billing, bill distribution, revenue collection and customer services and maintaining the infrastructure in water supply sector;

- (vii) Sampling treated water received at all the CWRs/OHSRs and from random points within the Zones/DMA to ensure that it meets the Potable Water Specification and monitor on monthly basis;
- (viii) Assessing and minimizing non-revenue water and locating the causes for high NRW and bringing down the NRW level within the 7% for DMA, 12 % from clear water source;
- (ix) Provide consumer service connections on approval or sanction by Employer Representative or line agency through Employer Representative;
- (x) Contractor will provide continuous on-the-job trainings that will start from the day the contractor gets mobilized, and other capacity building programs by the contractor as important regular activities for staff of the Employer, PHED and Local Body; and
- (xi) Maintaining environmental and safety norms at entire system components.

25. **Sewerage Works.** Under RSTDSP, it is designed to develop a sewerage system in Sardarshahar town to collect, treat, and dispose/reuse the domestic wastewater safely. This is being provided in a combination of underground sewerage system including treatment facility, and Fecal Sludge and Septage Management (FSSM) system in areas that are not fully developed at present and not feasible to provide sewer network. About 88.5% of the total base year population (2021) is designed to be covered by sewerage system, while the rest 11.5% will be covered by FSSM. The objectives of the designed sewerage works are:

- (i) Construction of sewerage network, including house sewer connection and collection of wastewaters from point of generation;
- (ii) Construction of energy efficient and mechanized Sewage Treatment Plant and electromechanical machinery;
- (iii) Septage management and decentralized wastewater treatment systems in suitable areas;
- (iv) Provision for reuse of treated effluent etc;
- (v) To ensure 100 % house service connections for wastewater collection;
- (vi) To ensure sustainability of the project by implementing a comprehensive asset management plan focusing on an integrated approach to operation and maintenance to minimize lifecycle costs.

26. The sewer system will be designed as a separate sewer system that carries only the domestic/municipal wastewater. The open drain system that exists in the town will cater to storm runoff. No industrial wastewater will be allowed into the sewers. This subproject complies with the environmental subproject selection criteria (Appendix 3) agreed between the government and the ADB.

27. **Sewage treatment.** It is designed to develop Sequential Batch Reactor (SBR) - based sewage treatment facility that will treat the incoming sewage to stringent discharge standards specified in this IEE and included in the bid documents. SBR is a cyclic activated sludge treatment process and provides highest treatment efficiency possible in a single step biological process. Three treatment plants of capacities 2.30 MLD, 3.40 MLD and 1.60 MLD designed in addition to this upgradation of two existing STPs of 2 and 5 MLD are designed to meet the demand.

28. **Reuse of treated effluent.** The Rajasthan State Sewerage and Wastewater Policy, 2016, promotes the reuse of treated sewage for non-potable applications, and to make sewerage projects environmentally sustainable. This policy:

- (i) aims to ensure improved health status of urban population, specially the poor and under privileged, through the provision of sustainable sanitation services and protection of environment;
- (ii) promotes the reuse and provides guidance on the same;
- (iii) prioritizes reuse in irrigation (agriculture, forestry, and landscaping), followed by fish farming, industry and non-potable domestic reuse;
- (iv) requires monitoring of treated wastewater quality, soil quality etc;
- (v) prohibits artificial recharge of aquifers using treated wastewater, and promotes construction of storage tanks to store treated wastewater to facilitate reuse;
- (vi) prescribes that the detailed project report (DPR) of a sewerage project should clearly define the best reuse option specific to the town and prepare a Reuse Action Plan part of the DPR duly following the water quality norms and legal implications; and
- (vii) suggests use of sludge produced from the treatment as fertilizer and soil conditioner after processing.

29. Excerpts on reuse from Rajasthan state Sewerage and Wastewater Policy is provided in Appendix 17.

30. To further the implementation of the Policy, to promote the reuse and provide guidance to the stakeholders, the Local Self Government Department (LSGD) is currently in the process of publishing "Guidelines for Reuse of Treated Wastewater in Rajasthan 2019. These guidelines:

- (i) promote the use the treated wastewater and envisages to maximize the collection and treatment of sewage generated and reuse of treated wastewater on a sustainable basis, thereby reducing dependency on freshwater resources;
- (ii) promotes the use of treated wastewater as an economic resource.

31. Under the subproject, following the State Policy, treated effluent will be reused in applications such as agriculture, horticulture, development of urban forestry and industry as appropriate. A Treated Effluent Reuse Plan will be prepared by the DBO Contractor during the detailed design phase as envisage by the State Policy, and reuse modalities will be firmed up. To facilitate reuse and supply of treated effluent, A treated effluent storage reservoir (TESR), effluent pumping station and a treated effluent elevated reservoir (TEER) are designed at the STP in the subproject. Total storage capacity of TESR and TEER at each STP is 15% of respective STP treatment capacity. Treated effluent will be chlorinated and prior to its entry into TESR/TEER. Appendix 18 provides the Guidelines for Sewerage System Operations, Reuse of Treated Effluent and Sludge from STP for Beneficial Purposes

32. **Discharge of treated wastewater.** The excess / surplus treated wastewater that is not reused will be discharged into nearby water channels/drains, and necessary facilities like pipelines and pumping requirements, will be developed.

33. **Sludge treatment and disposal.** A Sludge Sump shall be provided to collect thickened sludge from SBR basins. Supernatant from the sump will be returned to inlet/equalization tank for treatment. Sludge from sump will be pumped to sludge thickener, and the thickened sludge will be pumped to mechanical sludge dewatering system (such as centrifuge). Dewatered sludge cake will further air dried in a sludge storage shed for 15 days and disposed in an identified site.

34. **Operation and maintenance (O&M) of Sewerage system.** The DBO contractor will operate and maintain the system for a period of 10 years after completion of construction and commissioning the new system. This will include the following:

- (i) sewage pumping system to pump sewage to sewage treatment plant (STP) including maintenance of entire system and maintaining the infrastructure (power charges to be paid by the Employer);
- (ii) STP including maintenance of entire system and maintaining the infrastructure (power charges to be paid by the employer);
- (iii) Managing the sewerage network for collection of sewage including maintenance of entire system from property chambers up to disposal outfall of Sewage to STP;
- (iv) Sampling treated effluent to ensure that it meets the guaranteed treatment parameters;
- (v) Provide house connections for collection of sewage from house properties on approval or sanction by Employer;
- (vi) Contractor will provide continuous on-the-job trainings that will start from the day the contractor gets mobilized, and other capacity building programs by the contractor as important regular activities for staff of the Employer, PHED and Municipal Council / Corporation; and
- (vii) Maintaining environmental norms at entire system components.

35. **Faecal Sludge and Septage Management (FSSM).** It is designed to provide FSSM system in areas where the population density is low (less than 100 persons per hectare) and will not generate sewage in adequate quantity to convey by sewer network. FSSM will provide low cost sanitation in areas where sewer network is not an immediate requirement, will make septage collection, treatment and effluent management environment- friendly. Of the 40 wards in Sardarshahar, there are 9 wards (Wards 2,10,12,14,19,24,35 and 37) that have areas with scattered development and low population density. Total base year (2021) population of these wards is 27782, of which about 46% (12740 person) will be covered with FSSM and rest will be covered by sewer network. This is about 11.5% of total town population. Under the FSSM, fecal sludge / septage will be collected from the household level septic tanks using truck mounted mobile desludging equipment and transported to Sewage Treatment Plant (STP) for treatment. STP will have necessary provisions to receive and treat the septage along with the wastewater received via sewer network. STP will be designed accordingly by the successful bidder during the detailed design phase to comply with the treated effluent discharge standards specified in the bidding documents.

36. **Operation and maintenance (O&M) of FSSM.** The DBO contractor will operate and maintain the system for a period of 10 years. This will include the following:

- (i) Desludging the septic tanks / pits from the individual houses using mobile truck mounted desludging equipment
- (ii) Transportation of the vehicle to STP, dispose-off septage to Inlet chamber/screen chamber of STP, Cleaning of the tank, and proper garaging of the vehicle at designated place.

### C. Subproject Components

37. Table 3 shows the nature and size of the various civil works components of this water supply and sewerage subproject in Sardarshahar. Conceptual layout plans and alignments are shown in Figures 1 to Figure 16.

38. Subproject is designed for implementation under (Design-Build-Operate) modality, wherein which the successful bidder will design the water supply and sewerage systems and components (based on the feasibility / preliminary design / standards / guidelines provided in the bid document), construct, commission, and operate for 10 years, after which it will be transferred to Sardarshahar Municipal Council. Therefore, at this stage, subproject is designed only in outline, and the details of components of the subproject provided in the table below are as finalized at this stage based on the preliminary designs and as included in the bid documents. This IEE is based on the subprojects and components detailed in the below table, and the IEE will be further updated during the detailed design phase. Geographical position coordinates of all project sites are given in Appendix 11.

**Table 4: Proposed Sardarshahar Subproject Components**

| Infrastructure                        | Function                                          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Location                                                      |
|---------------------------------------|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|
| <b>Water Supply</b>                   |                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                               |
| Clear water reservoir                 | Storage and pumping of clear water for supply     | New<br>1 CWR of 2400 kl Capacity with one new Pump House- 35x 10 m<br><br>Rehabilitation<br><br>Existing 4100 kl CWR and Clear Water Pump House at existing PHED campus at Hanumangarh road                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Existing PHED campus headworks at Hanumangarh road            |
| Rehabilitation of OHSRs               | Storage and supply of clear water through gravity | Existing<br><br>Rehabilitation & Refurbishment of<br><br>1.Ramnagar (Zone-01) 1500 KL<br>2.Holidora (Zone-02) 500 KL<br>3.Behrudar (Zone-03) 1500 KL<br>4.Suryamandir (Zone-04) 1500 KL- along with boundary wall<br><br>Designed works for rehabilitation <ul style="list-style-type: none"> <li>• Earth work Excavation</li> <li>• PCC</li> <li>• Raft / bottom beam</li> <li>• Columns, bracings &amp; bottom beam below conical wall</li> <li>• Conical wall &amp; first lift of vertical wall</li> <li>• Remaining vertical wall &amp; top dome with other ancillary works such as plinth protection, etc.</li> <li>• piping and hydraulic testing / Plastering</li> </ul> | OHSRs located at Bairudan, Holidhora, Suryamandir, & Ramnagar |
| Rehabilitation of existing Tube Wells | Abstract groundwater                              | Rehabilitation<br>Out of total existing 45 tube/open wells in town, Rehabilitation work to be done for 26 tube /open wells<br>Replacement of pipes, pumps, valves, all electro-mechanical items etc.                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | TWs at different locations in town.                           |
| Chlorinator                           | Post chlorination                                 | New                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Chlorinators will be                                          |

| Infrastructure                                                                            | Function                                                                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Location                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| system                                                                                    | / disinfection of water prior to supply                                    | One chlorinator room and vacuum feed chlorination system of capacity 3 kg per hour                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | installed at the Hanumangarh road CWR:                                                                                                                                                                                                                                                                                                                                                                                                        |
| Water supply distribution networks including House service connection                     | Collect water from service reservoir and distribution to households        | New Construct 193 km of distribution network (75mm to 400mm material : DI and HDPE)<br><br>New 22000 Consumer Connections.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Existing ROW of roads under Nagar Palika, Different locations within town                                                                                                                                                                                                                                                                                                                                                                     |
| Consumer Relation and Management Centre, Central Control Centre and Master Control Centre | Consumer relations and SCADA system control for entire water supply system | New Consumer Relation Management Centers (CRMC) – 2 no.- at Fire Station campus and at PHED campus at Hanumangarh road<br>Central Control Centre (CCC) – 1 no.<br>Master Control Centre- 1 no.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | CRMC-1, CCC and MCC At existing PHED campus at Hanumangarh Road<br>CRMC-2 at Fire Station campus                                                                                                                                                                                                                                                                                                                                              |
| <b>Sewerage Works</b>                                                                     |                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Construction of new STPs – 3 nos and upgradation of 2 existing STPs                       | Treatment of collected wastewater to meet stipulated discharge standards   | <p>New STPs</p> <p>STP- 1 - 2.30 MLD<br/>STP- 2 - 3.40 MLD<br/>STP-3 (1.60 MLD)</p> <p>SBR (sequential batch reactor) based STP with primary, secondary, tertiary treatment<br/>Disinfection of treated wastewater for reuse – chlorination tank<br/>sludge management (sludge collection, thickening, dewatering and disposal)<br/>Laboratory, and online testing facilities for BOD, COD, TSS etc.,)<br/>Instrumentation, automation, SCADA etc.,</p> <p>Upgradation of Existing STPs</p> <p>5 MLD WSP-based STP at South campus, constructed under UIDSSMT but is not yet operational.</p> <p>2 MLD WS- based STP at North Campus constructed under UIDSSMT, which is not yet operational.</p> <p>The existing (WSP) STPs will be upgraded to achieve the discharge standards prescribed by CPCBs</p> <p>Technology for upgradation is open for any process suggested by CPHEEO manual/ Technology provided by NEERI (National Environmental Engineering Research Institute)</p> | <p>STP- 1 (2.30 MLD)- within the existing STP South campus of Sardarshahar- Location is confirmed</p> <p>STP- 2 (3.40 MLD)- within the existing STP of North campus of Sardarshahar- location is confirmed</p> <p>STP-3 (1.60 MLD)-near Ashoke circle in land donated by Gandhi Vidhya Mandir trust- NOC is given by Gandhi Vidya Mandir Seva Samiti (Trust) and MOU/negotiations are under process to take over land for proposed works.</p> |

| Infrastructure                   | Function                                                                                                                                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Location                                                                                                                                                                                                  |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                  |                                                                                                                                              | DEWATS treatment methodology / Soil Biotechnology of IIT's of India or any other proven technology adhered to result desired norms etc.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                           |
| Treated wastewater storage tanks | Store the treated wastewater for reuse, and also provide adequate pressure / elevation for supply                                            | <p>New</p> <p>Treated Effluent Elevated Reservoir (TEER), Treated Effluent Storage Reservoir (TESR), Effluent Pumping Station (EPS) for reuse of treated effluent.</p> <p>STP-South 2.30 MLD<br/>Construction of one treated effluent storage reservoir (TESR) of 370 KL, Treated Effluent Elevated Reservoir (TEER) 730 KL (22 m staging), Treated effluent Pump House of required capacity (16 hrs pumping)</p> <p>STP- North 3.40 MLD<br/>Construction of one treated effluent storage reservoir (TESR) of 270 KL, Treated Effluent Elevated Reservoir (TEER) 540 KL (22 m staging), Treated effluent Pump House of required capacity (16 hrs pumping),</p> <p>STP (GVM)- 1.6MLD<br/>Construction of one treated effluent storage reservoir (TESR) of 80 KL, Treated Effluent Elevated Reservoir (TEER)160 KL (22 m staging), Treated effluent, Pump House of required capacity (16 hrs pumping)</p> <p>Provision for mobile tanker filling points and rising mains/ distribution system, bypass/ overflow arrangements at the TEER to facilitate reuse<br/>Instrumentation, automation, SCADA etc</p> | Within designed STP campus                                                                                                                                                                                |
| Sewage Pumping Station (SPS)     | Sewer pumping stations are used to move wastewater to higher elevations in order to allow transport by gravity flow until the sewage reaches | <p>New<br/>(SPS – 8) of 0.65 MLD.<br/>(SPS – 6) of 2.30 MLD</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <p>In ward no. 6 at Gaushala Bhoomi near Shyam Deb Hotel (SPS-8)- Location is not confirmed and can be changed</p> <p>In ward no. 2 near Gauchar Bhoomi near Doordarshan Relay Kendra and Kabaristaan</p> |



| Infrastructure                                                                                                                                   | Function                                                                                                                                 | Description                                                                                                                                                                                                                                                | Location                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|
|                                                                                                                                                  | treatment plant.                                                                                                                         |                                                                                                                                                                                                                                                            | (SPS-6)- Location is confirmed                                |
| Rising Mains for SPSs                                                                                                                            |                                                                                                                                          | New<br>From SPS-8 for zone 2 to designed MH Approx. L = 800 m, D=200 mm DI K9 pipes.<br>From SPS-6 for zone 3 to designed MH Approx. L = 1300 m, D=350 mm DI K9 pipes.<br>Supply, Laying, Testing and Commissioning of Rising Main for Pumping the Sewage. | Existing ROW of roads under Municipal Council                 |
| Sewer Networks including HOUSE SEWER CONNECTION                                                                                                  | Collect wastewater from houses and convey by a combination of gravity and pressure pumping to pumping station and ultimately to the STPs | New<br>Sewer network of 68 km (including 12.00 Km trenchless laying)<br>Generally, 1.2 to 3.5 m below the ground, and deeper (> 2m) and maximum depth will be 11 m (trenchless work).<br><br>house sewer connections- total 5600 nos.                      | Different locations of town along the existing roads with ROW |
| <b>FSSM</b>                                                                                                                                      |                                                                                                                                          |                                                                                                                                                                                                                                                            |                                                               |
| Truck mounted mobile desludging equipment (two truck mounted mobile desludging equipment, one with 4000 liters and another with 1000 L capacity) | Desludging of septage from household pits/septic tanks, transportation & discharge to STP                                                | mobile tankers with suction and discharge arrangements                                                                                                                                                                                                     | Mobile equipment                                              |

39. Design review of proposed works are still under process by DBO contractor and scope of works shall be further updated as soon as designs are finalized by contractor and approved by RUDSICO (EAP) and revised IEE shall be submitted to ADB for approval.

#### **D. Subproject Benefits**

40. The subproject is primarily designed to improve environmental quality and living conditions of Sardarshahar town through provision of water supply and sewerage. The benefits arising from this subproject include: (i) increased availability of potable water at appropriate pressure to all households including urban poor; (ii) reduced time and costs in accessing alternative sources of water. (iii) better public health particularly reduction in waterborne and infectious diseases; (iv) reduced risk of groundwater contamination; (v) reduced risk of contamination of treated water supplies; and, (vi) improvement in quality of water bodies due to disposal of treated effluent meeting disposal standards.

## **E. Implementation Schedule**

41. After the completion of feasibility study /preliminary designs, bids were invited in Aug 2019 for the subproject to be implemented under the DBO (design-build-operate) modality. After technical and financial evaluations of bids, works were awarded to successful bidder and NTP was issued on dated. 22.06.2020 and Design & Build completion date is 21.06.2023. After completion of construction and commissioning, scheme will be operated by DBO contractor for 10 years, after which the operation and maintenance will be carried out by Sardarshahar Nagar Palika. DBO contractor is still carrying out detailed designs.

## **F. Status of Detailed Design**

42. Presently design review by DBO contractor is underway. There are total 4 sewer zones proposed in the town out of which designs of zones 3 & 4 are approved. In water supply works, total 7 zones are proposed out of which designs of zones 1 and 4 are approved. All these zones under water supply and sewer works were primarily considered in designs and impact assessment of these zones were already done and considered in preparation of draft IEE. No new area is taken in approved designs. Design review and approval of balance works are under process by DBO contractor and consultants. After all the designs are revised/approved and Service Improvement Plan (SIP) is submitted by DBO contractor and approved by PIU/consultants, final scope of works shall be updated in the final IEE and shall be submitted to ADB for approval. Due diligence for the compliance of environmental safeguards is done for proposed works and a report is attached as Appendix 38 with this report. The updated layout plan of sewerage network for zone-4 and zone 3 and layout drawing of water distribution network for Sardashahar zone 4 and zone 1 are attached in Appendix 39.

43. **Change in scope of works and/or project locations.** Currently DBO contractor is reviewing the designs and there is no change in scope of works, the CWR site is shifted from originally proposed site within the existing PHED campus at Hanumangarh Road. Previously location for proposed works (CWR, pump house, CRMC-1 and CCC) were given on the North-West corner of the campus beside the existing CWR. Now the site has been changed and new site is situated on the South-West direction in the campus, behind the existing PHED Exn. Office building and approximately 500 mtrs away from previous site, avoiding all asbestos material stored at site.

44. The location of Consumer Relation Management Centers (CRMC) – 2 no. are also finalized at Fire Station campus (new site) and at PHED campus at Hanumangarh road.



**Figure 2: Layout of designed pump house and CWR in PHED campus**





Figure 3: Location of designed site of STP-1 (South campus) in Google Map





Figure 4: Location of designed site of STP-2 (North Campus) in Google Map





Figure 5: Location of designed site of SPS-1 in Google Map





Figure 6: Location of designed site of SPS-2 (at IGNU Guest House) in Google Map





**Figure 6A: Location of Proposed site for CWR, Pump House, CCC and CRMC-1 at PHED Campus at Hanumangarh Road in Google Map**



Coordinates of site: 28°26'46.54"N and 74°30'41.93"E



Figure 6B: Location of Proposed Site for CRMC-2 at Fire Station in Google Map



Coordinates of Site: 28°26'19.77"N and 74°28'52.15"E



Figure 7: STP (Existing and Designed) North and Disposal Point and Nearby sensitive receptor



STP North Disposal point    28°26'46.24"N/ 74°28'35.96"E



**Figure 8: STP (Existing and Designed) South Campus and Disposal Point and Nearby sensitive receptor**

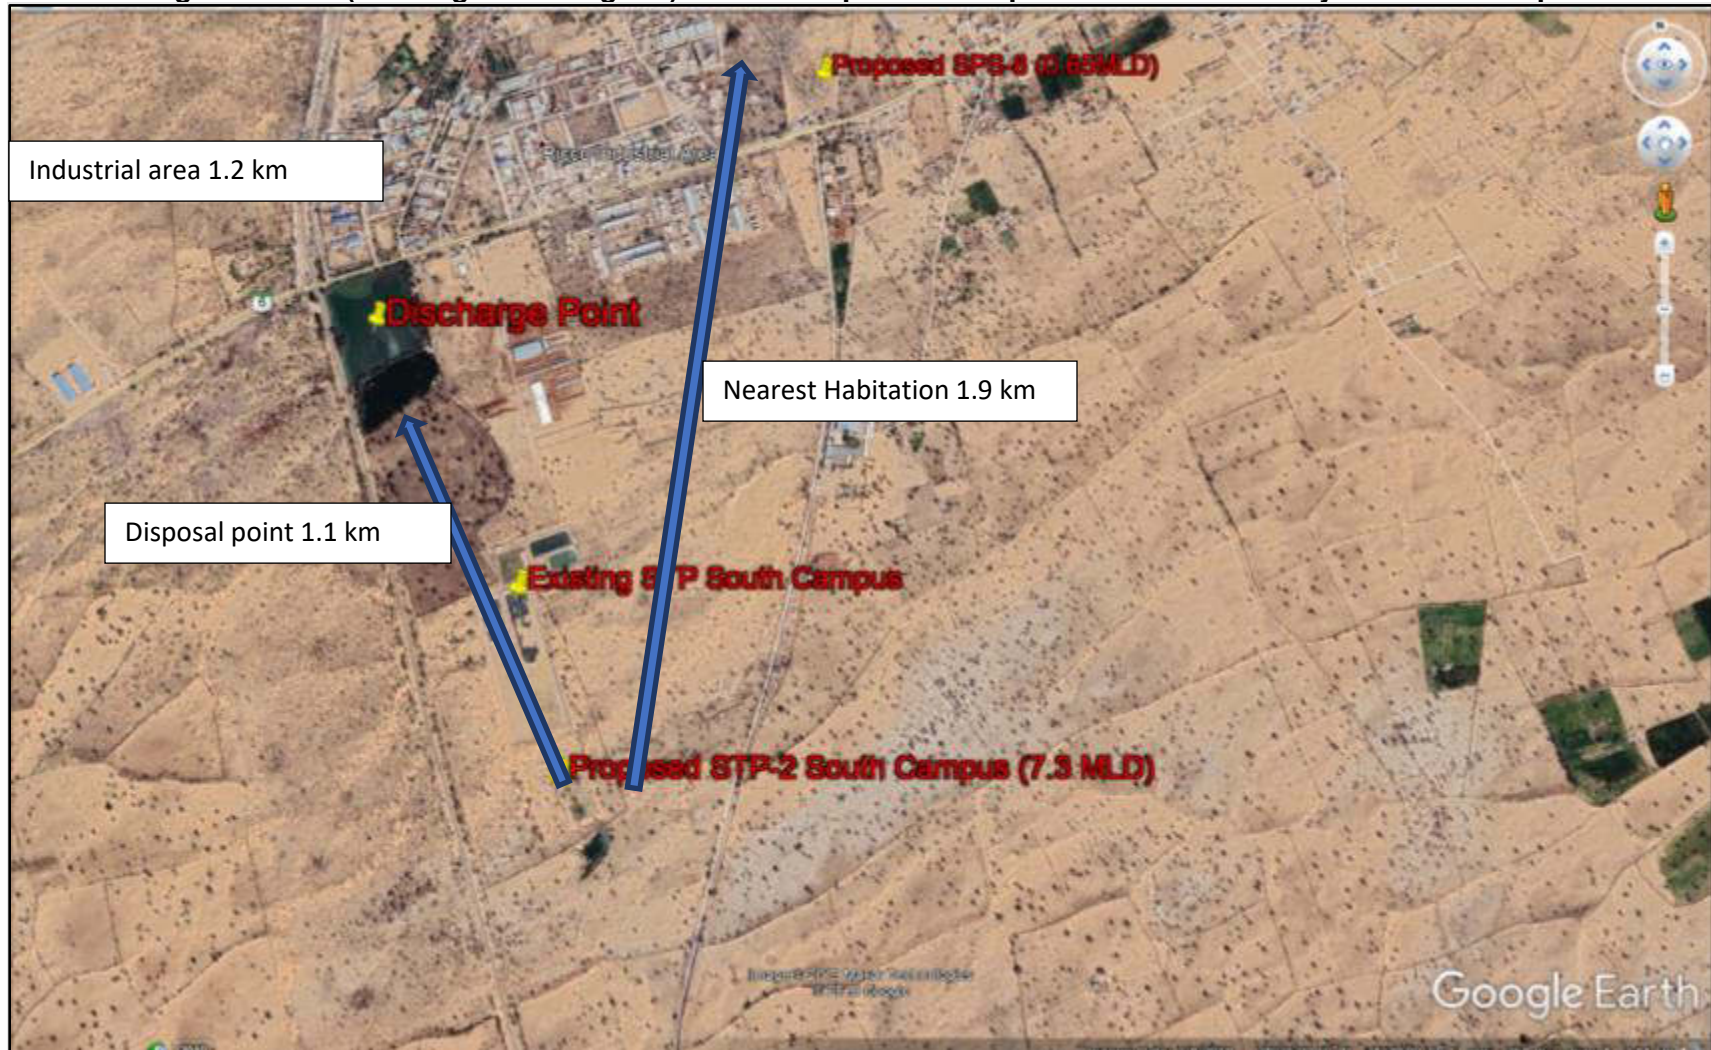




Figure 9: STP 3 (New-1.6 MLD) and Disposal Point and Nearby sensitive receptor





Figure 10: SPS-8 Location and nearest sensitive receptors





Figure 11: SPS-6 Location and nearest sensitive receptors



Figure 12: Layout of Designed STP 1.60 MLD



Figure 13: Layout of existing and designed sewer networks

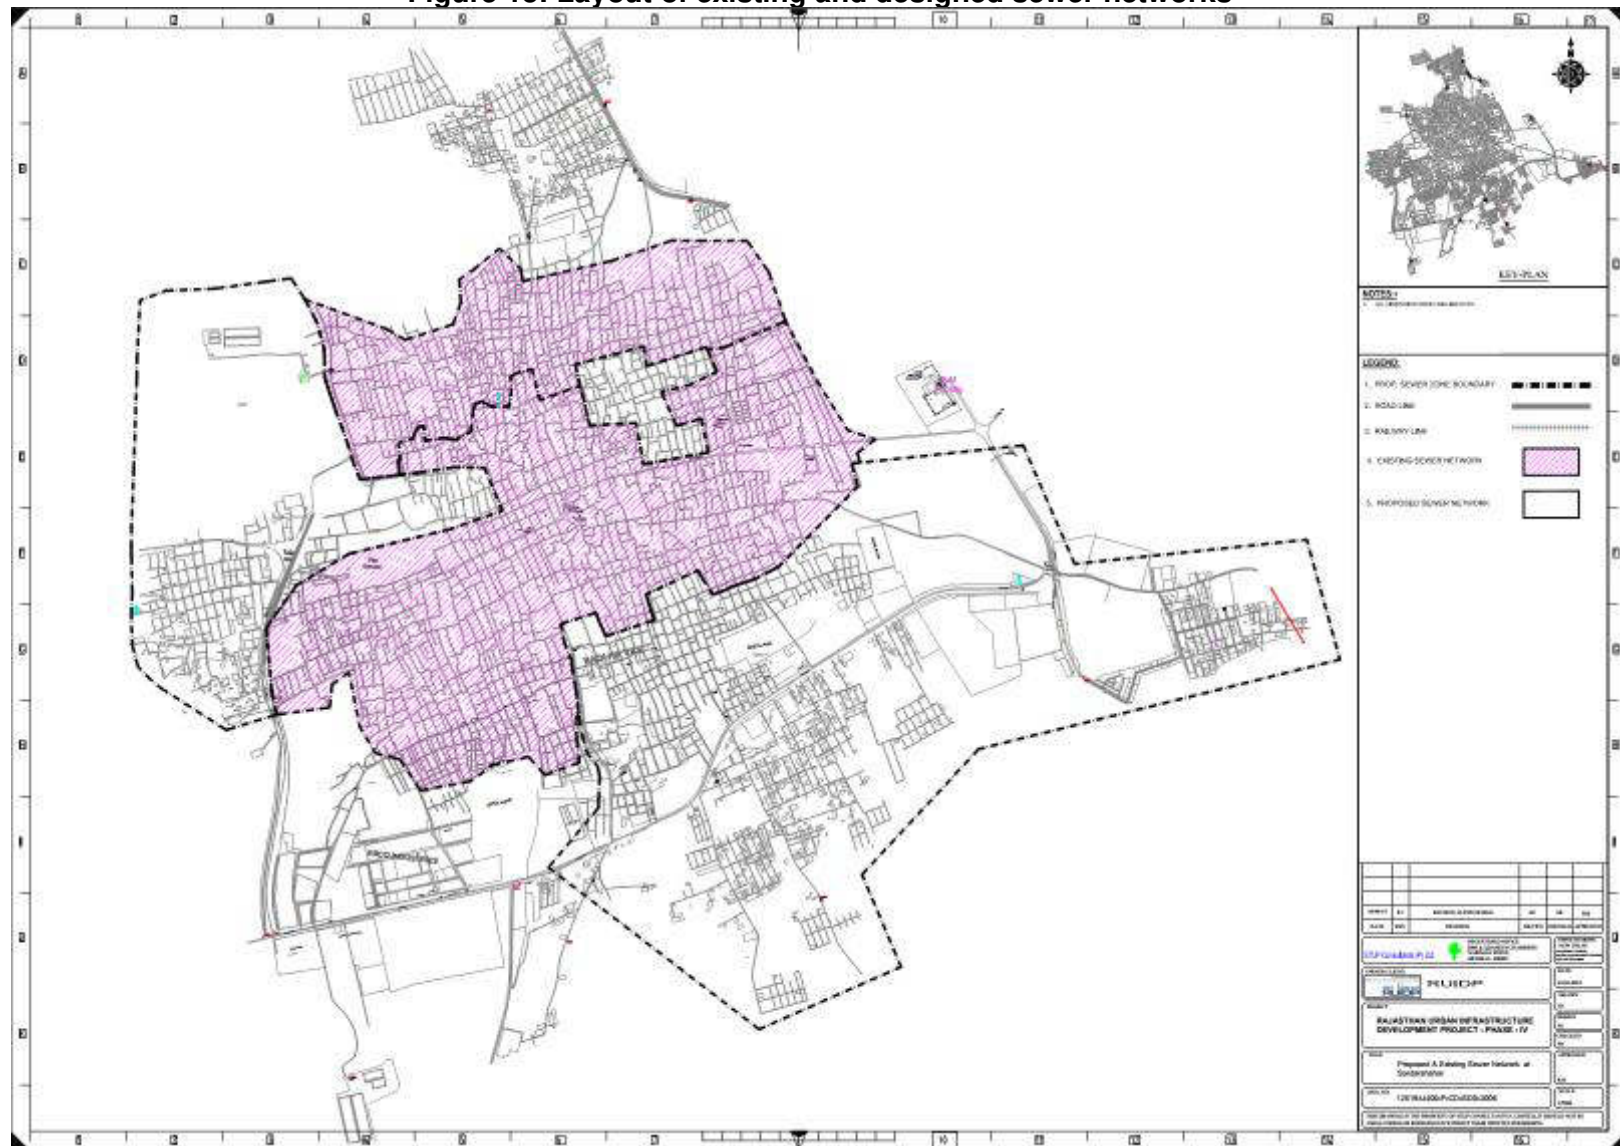
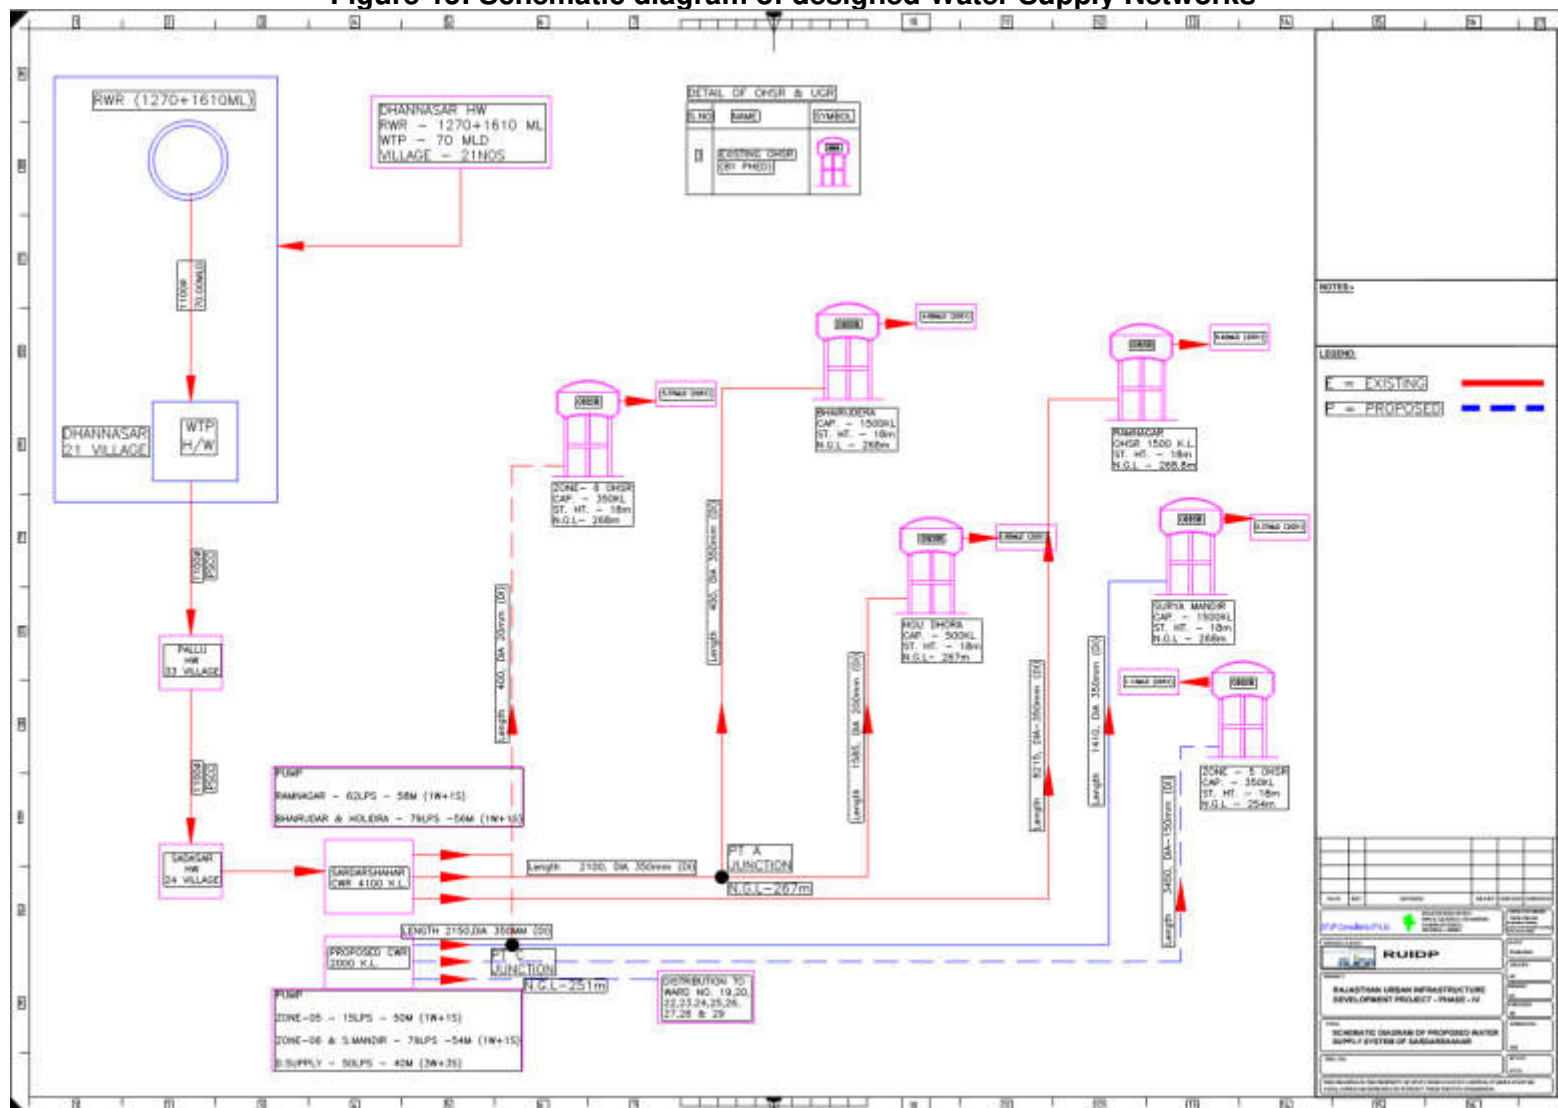




**Figure 15: Schematic diagram of designed Water Supply Networks**



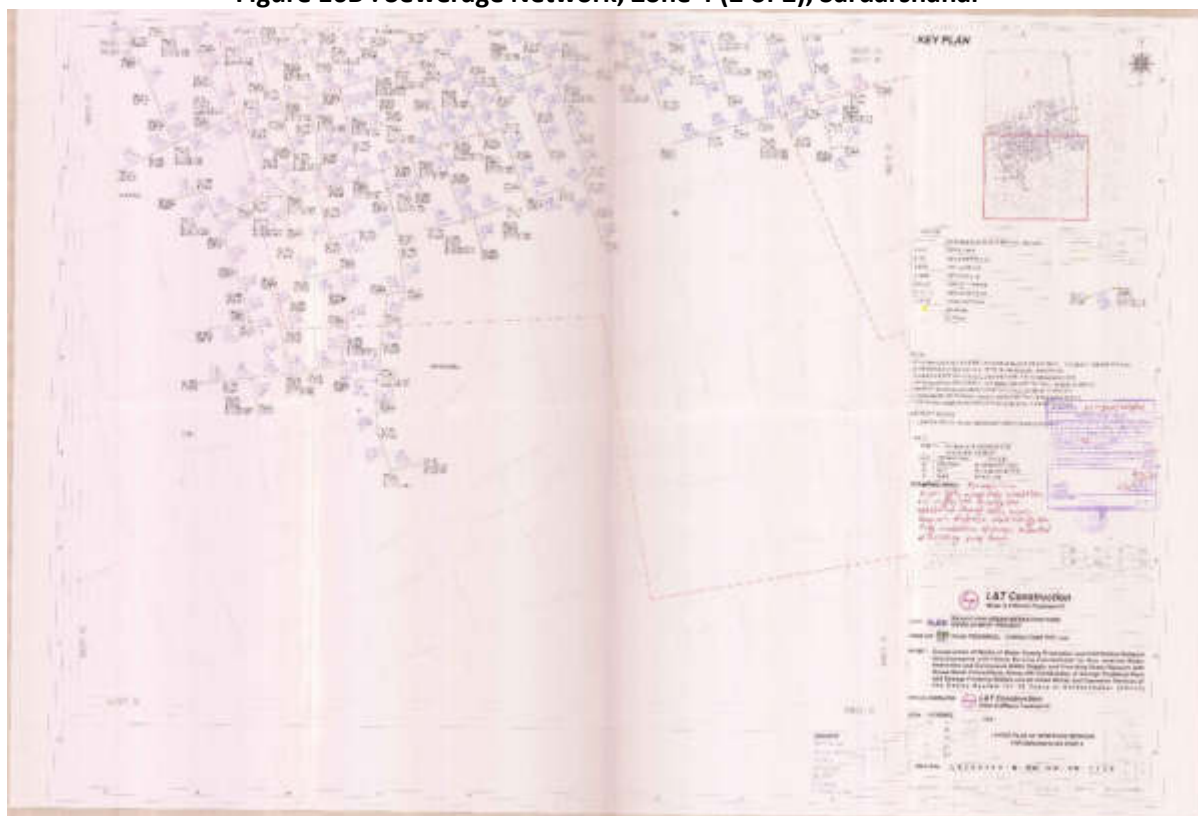





Figure 16C : Sewerage Network, Zone 3 (1 of 8), Sardarshahar

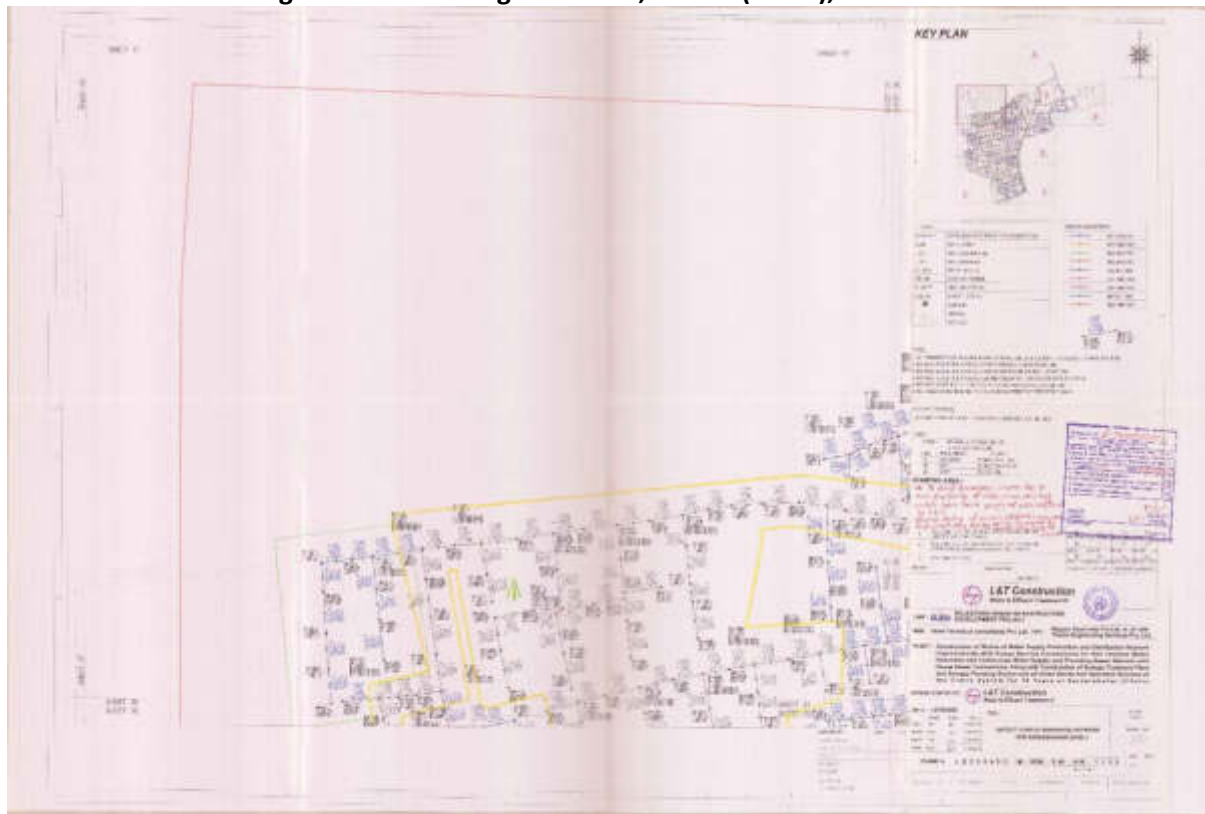


Figure 16D : Sewerage Network, Zone 3 (2 of 8), Sardarshahar

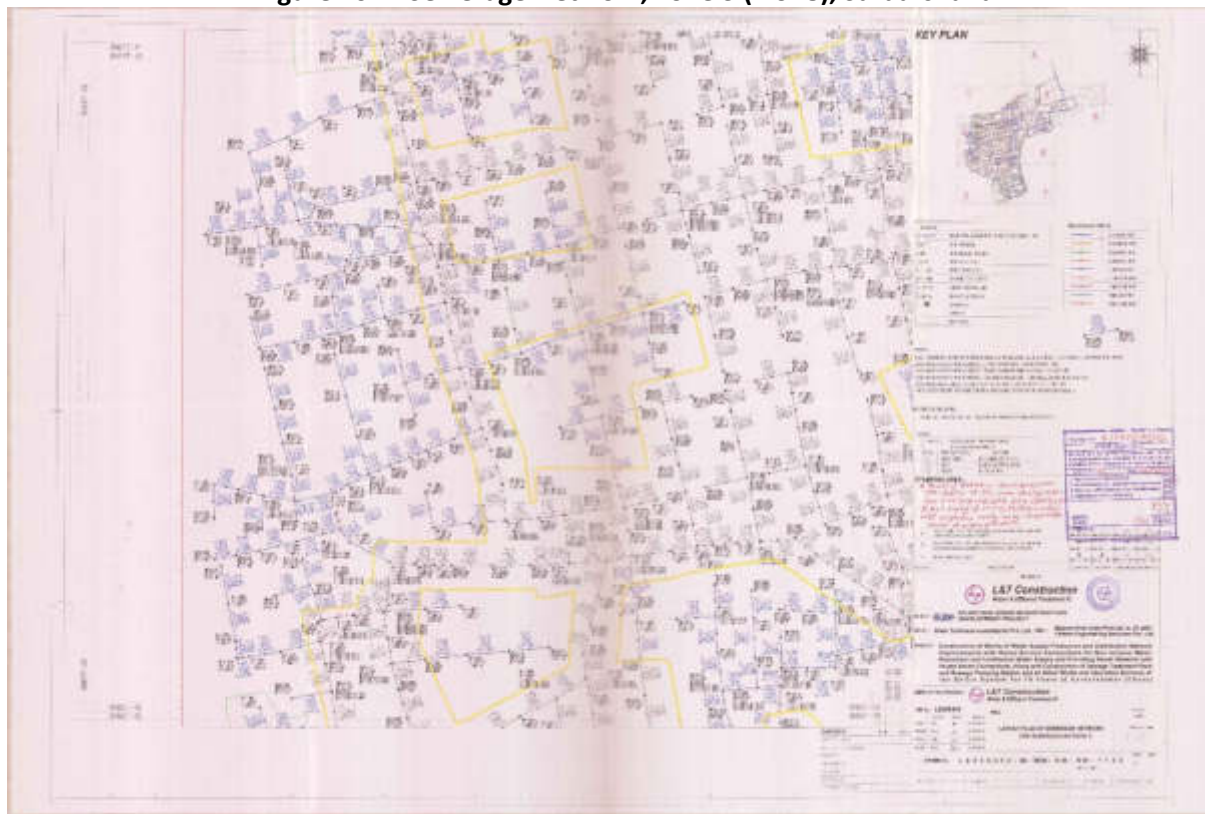


Figure 16E : Sewerage Network, Zone 3 (3 of 8), Sardarshahar

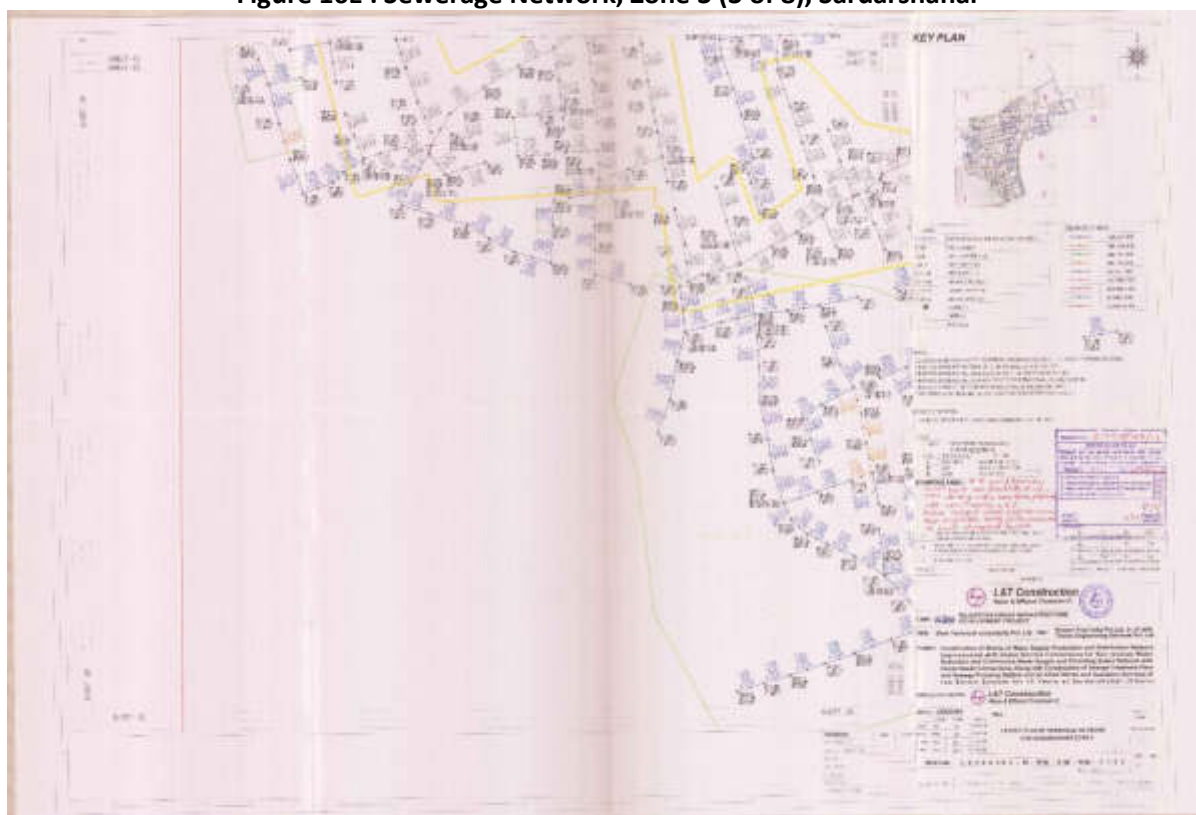


Figure 16F : Sewerage Network, Zone 3 (4 of 8), Sardarshahar

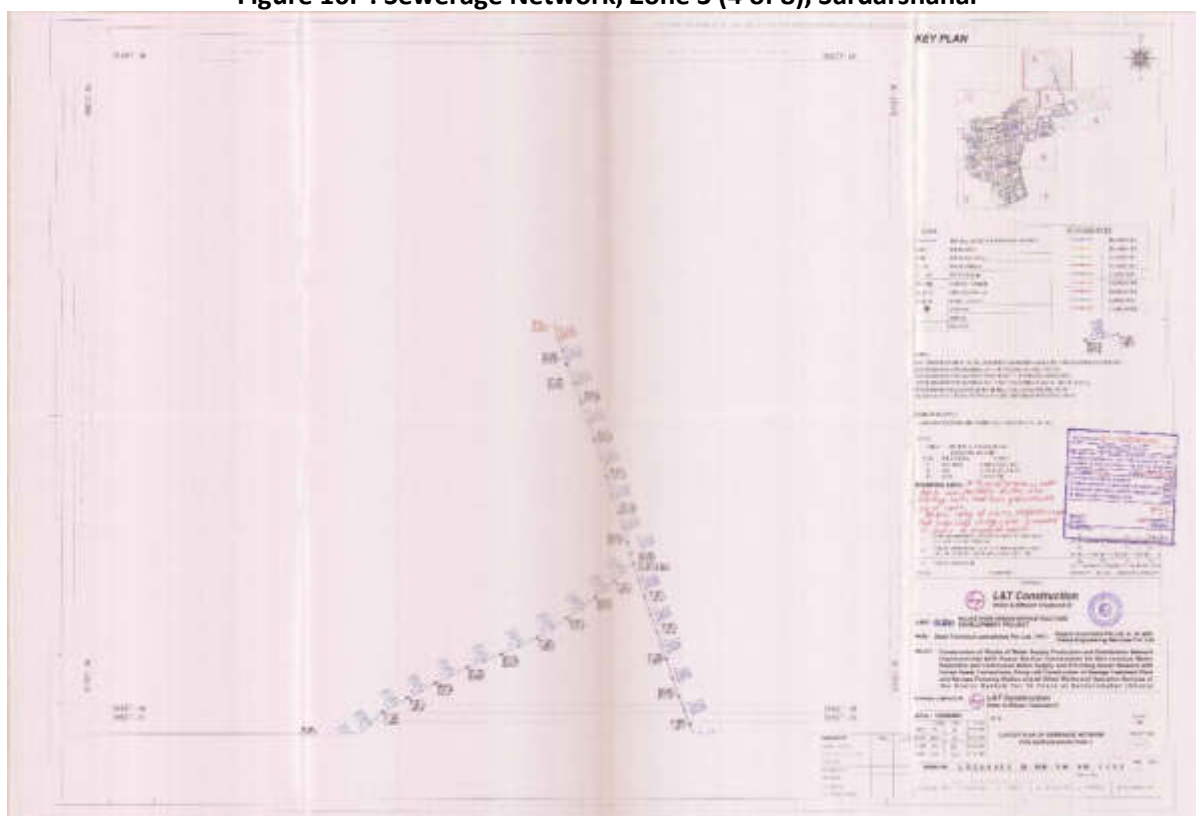


Figure 16G : Sewerage Network, Zone 3 (5 of 8), Sardarshahar

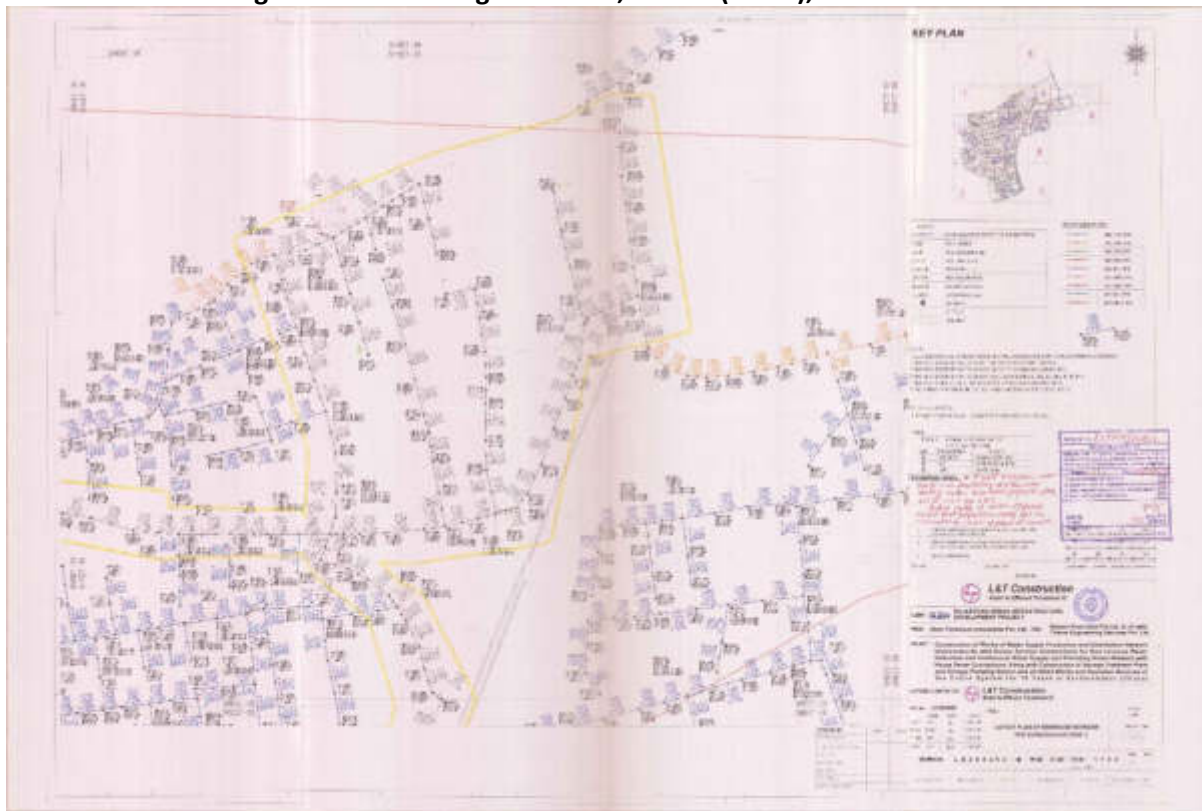


Figure 16H : Sewerage Network, Zone 3 (6 of 8), Sardarshahar

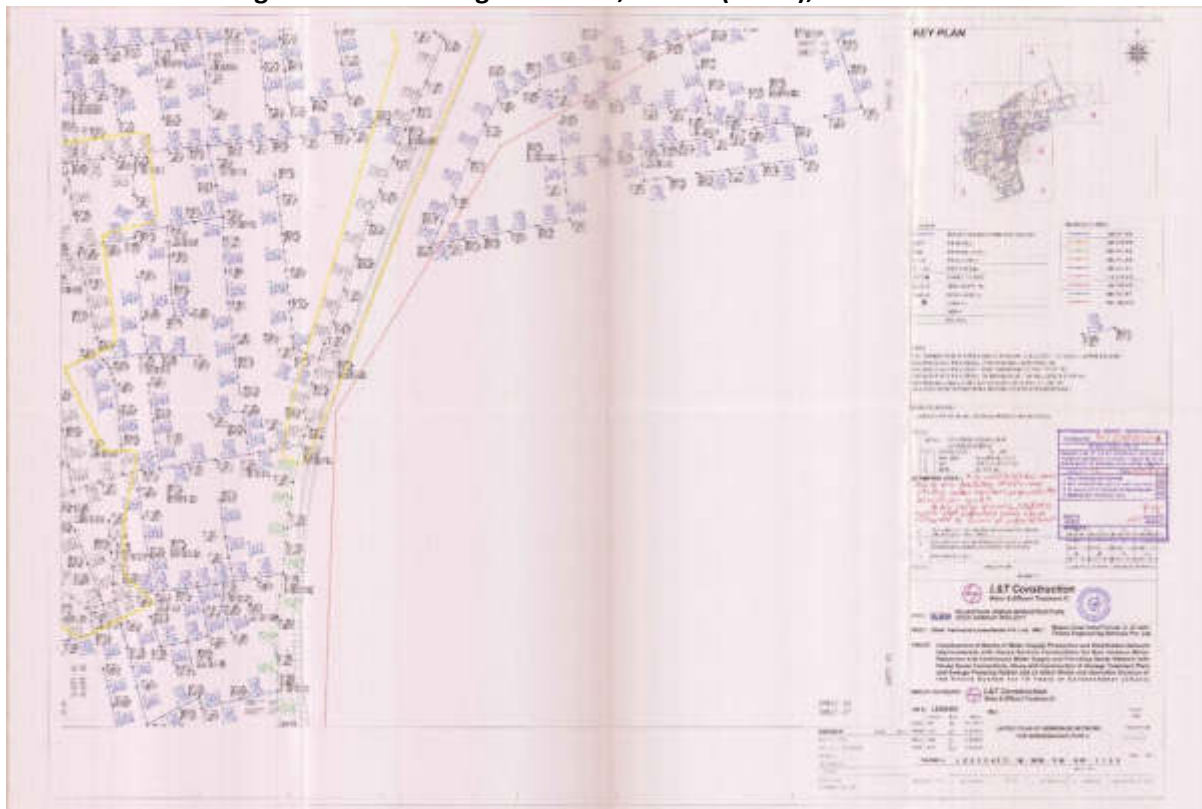




Figure 16I : Sewerage Network, Zone 3 (7 of 8), Sardarshahar

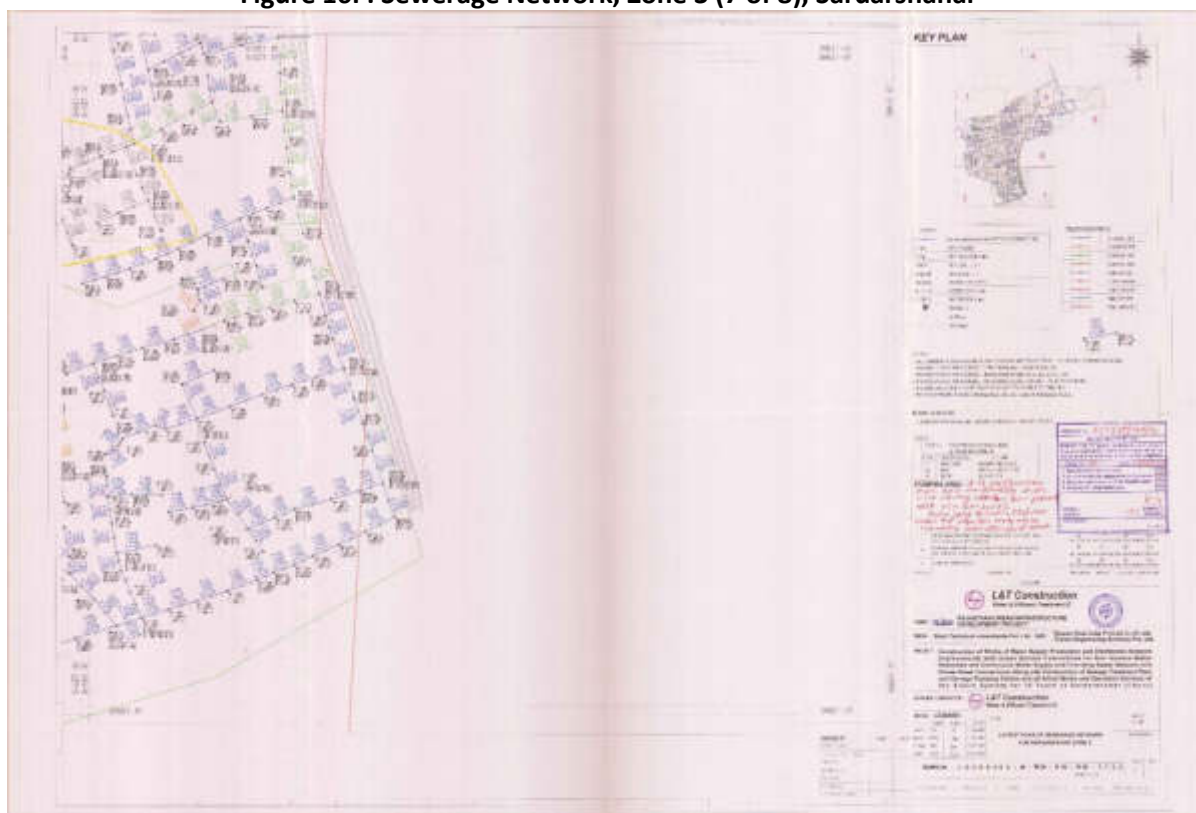


Figure 16J : Sewerage Network, Zone 3 (8 of 8), Sardarshahar

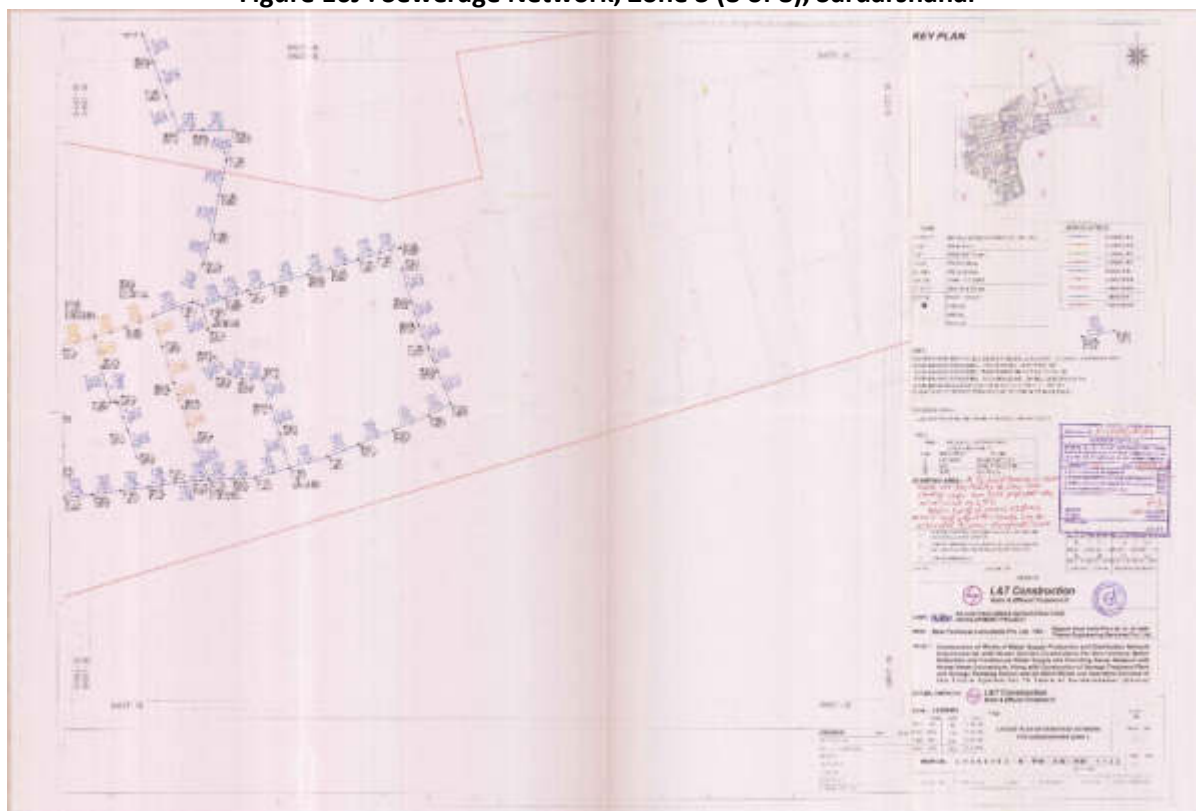




Figure 17A: Water Supply distribution, Zone 1 (Sample Maps)







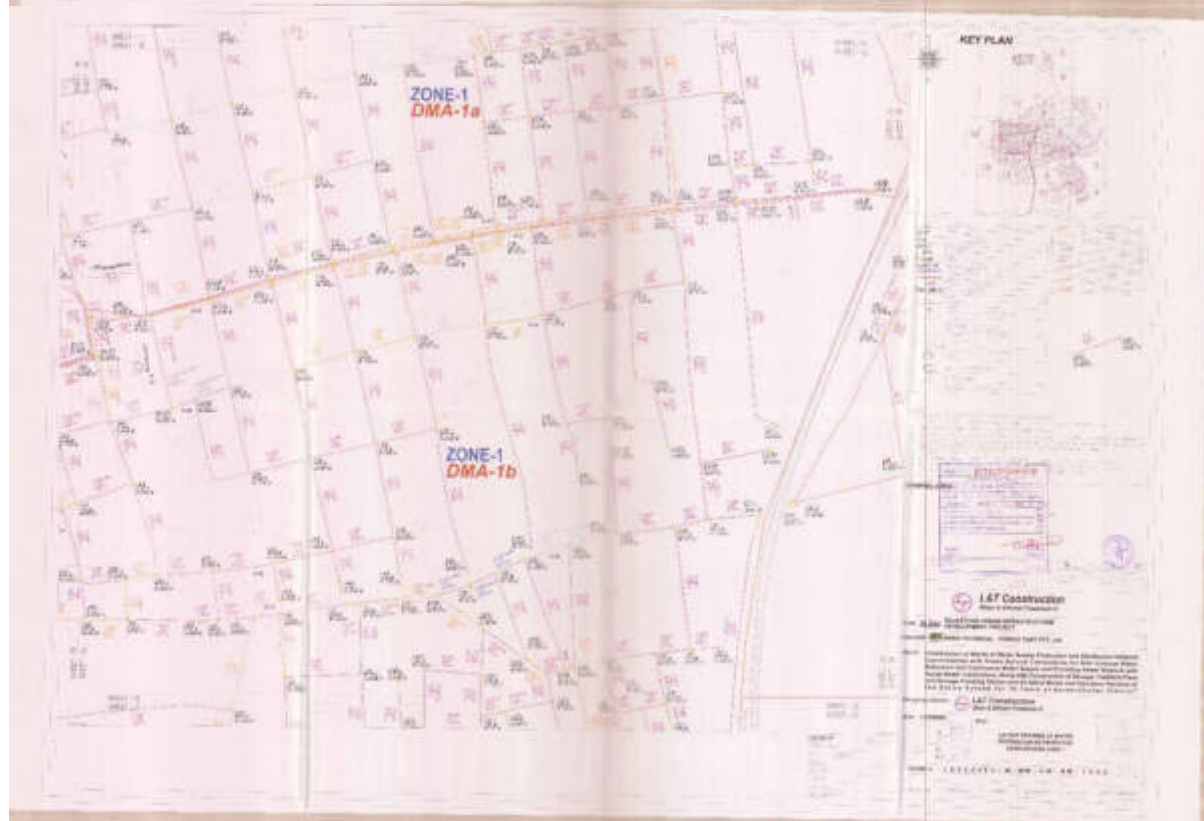


Figure 17B: Water Supply distribution, Zone 4 (Sample Maps)

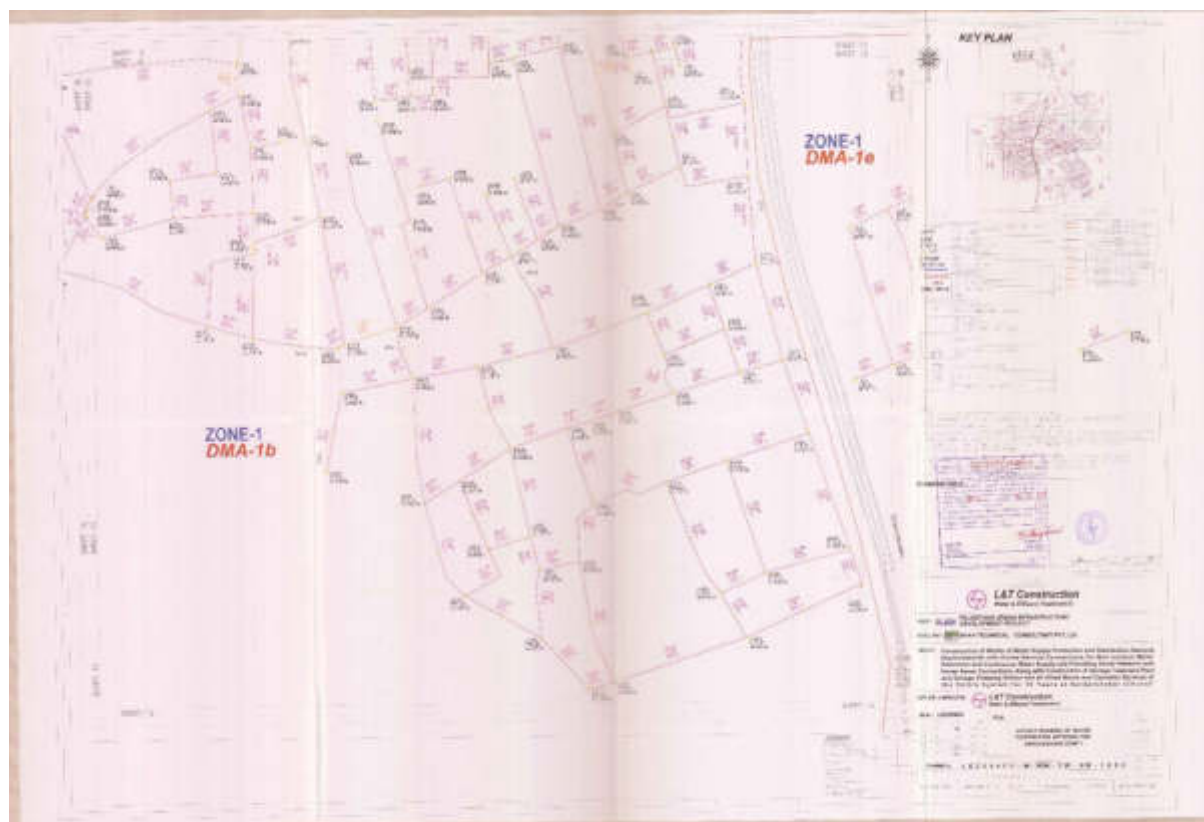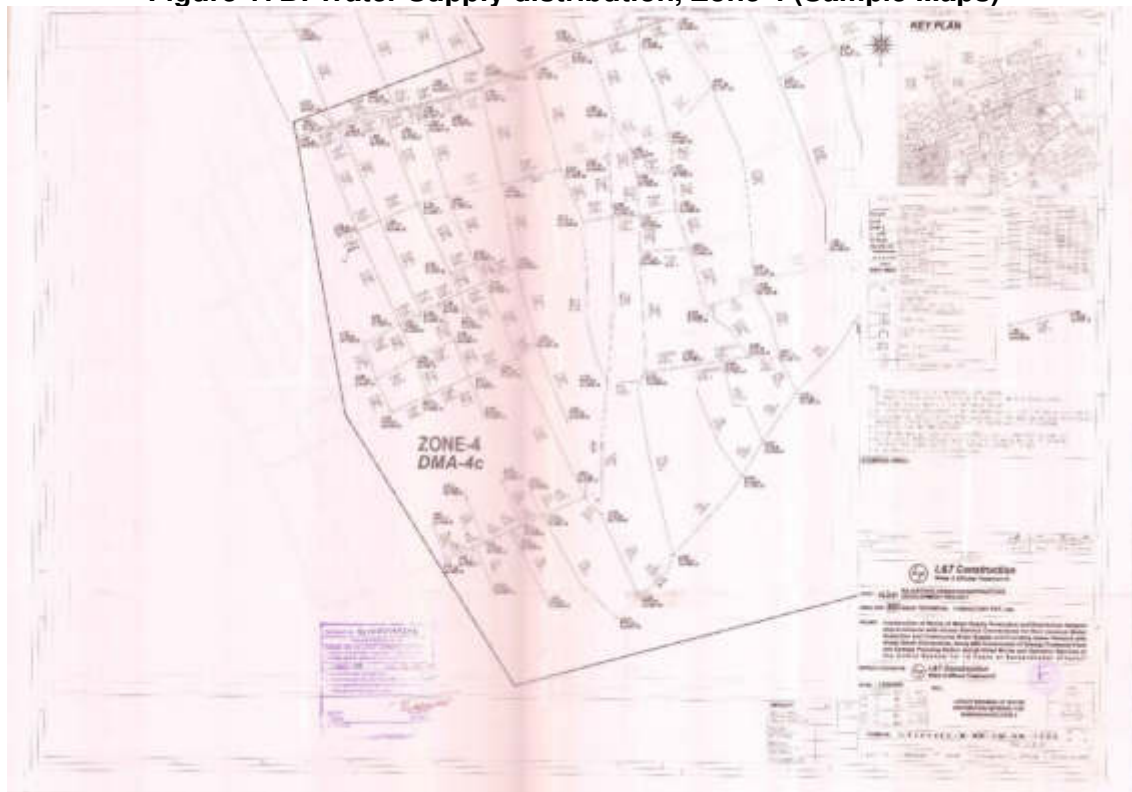

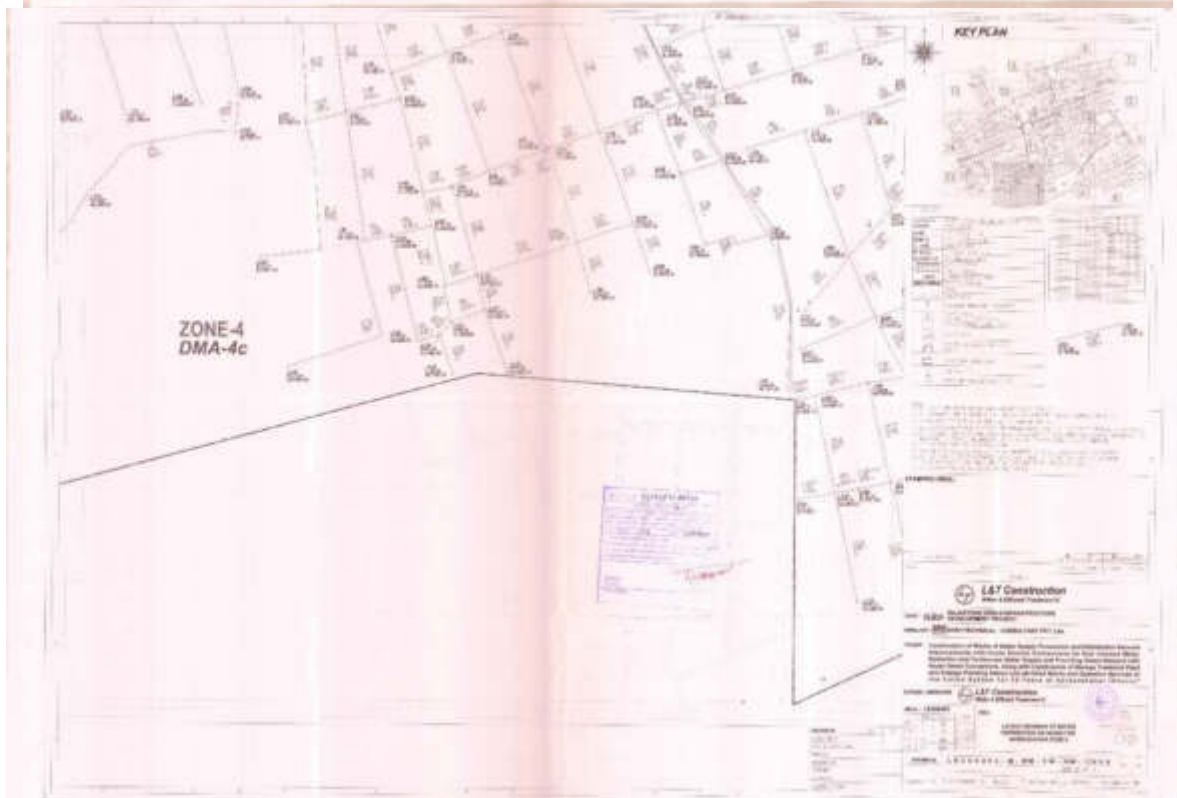

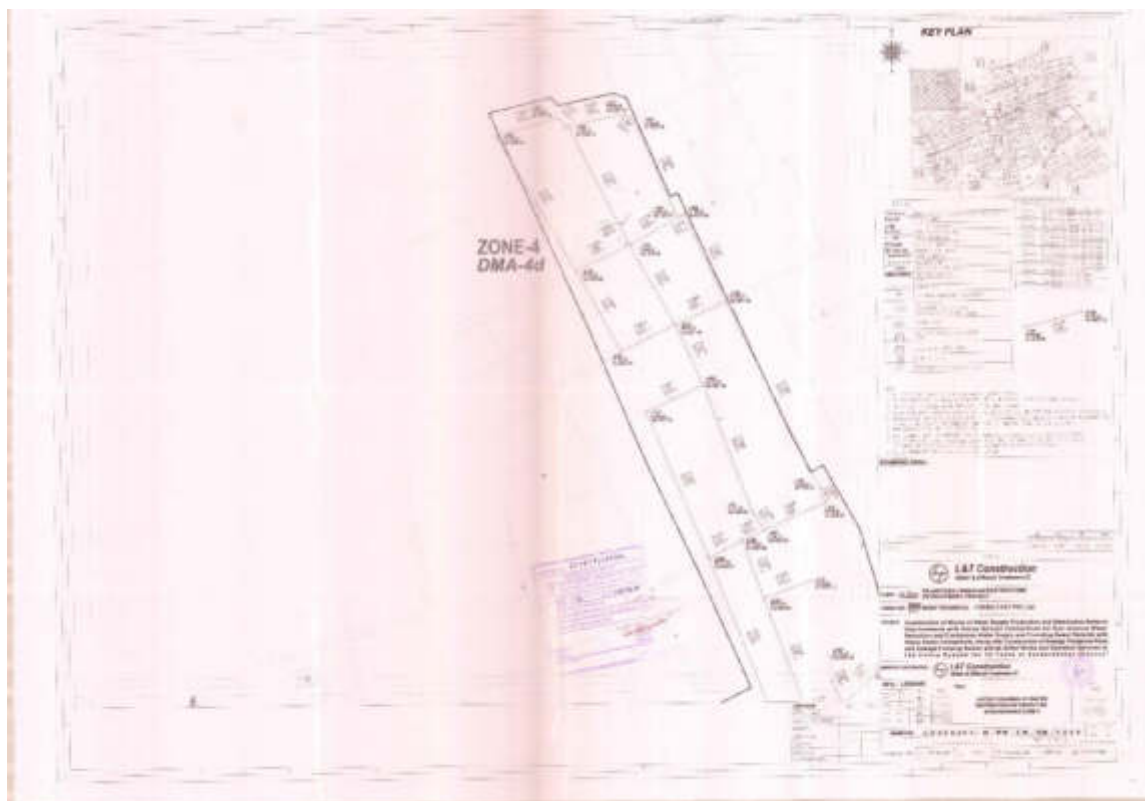

### III. ANALYSIS OF ALTERNATIVES

45. The SPS requires an analysis of project alternatives to determine the best method of achieving project objectives (which is providing potable water to people, and safely collecting and disposing the human waste generated, in Sardarshahar town, in this case) while minimizing environmental impacts. Alternative analysis provides opportunity to integrate environmental considerations into early stages of project (i.e., pre-feasibility or feasibility study), so that adverse environmental impacts can be avoided or minimized by various alternatives. It also provides opportunity to study various options vis a vis costs, provides a logical base, via transparent process, assist in decision making, gaining public support and ultimately in project approvals and timely implementation.

44. The designed water supply subproject component in Sardarshahar town include source augmentation to provide adequate water, water conveyance, treatment, storage and distribution. Similarly, the sewerage component includes sewage collection network, transmission, treatment and treated wastewater reuse and disposal. Descriptions of various alternatives considered for critical components such as water source, sewage treatment, treated wastewater disposal etc., are presented in the following table 4.

**Table 5: Analysis of Alternatives**

| 1.                          | Project Need – No Project Alternative                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type of alternative         | 'No project' alternative                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Description of alternatives | <p>Sardarshahar subproject is designed to improve the service levels of basic infrastructure – water supply and sewerage, which will ultimately improve</p> <p>At present, Sardarshahar town residents suffer from inadequate, intermittent and low-pressure supply at a rate of 90 to 100 liters per capita per day (lpcd), which is considerably less than the norm of 135 lpcd. Water is supplied 1-2hours daily with low pressure, the service does not cover the entire town. System is old, inefficient, and leakages are frequent in water pipes, and consequently water losses are high. At present there is no functional sewerage system in the town; Sewer is laid under UIDSSMT project currently in Sardarsahar. Presently 4 sewerage pumping stations and 2 STP's based on WSP (Waste Stabilization Ponds) technology are being constructed which when connected to the sewer system will cater to the demand up to the intermediate year 2025 as per the designed Detailed report prepared under UIDSSMT. As per the DPR prepared under UIDSSMT Sewer Lines are supposed to be laid under Phase-I and II of the schemes. Total 155 km of various dia (150 mm to 1000 mm dia)was designed. Among 155 km, 109 km has been laid households depend on individual septic tanks or direct discharge into open drains that meant for surface drainage. There are no soak pits, and the effluent discharge into open drains. The untreated / partially treated sewage flow in the open drains through habitation areas and discharged into rivers/streams. Living conditions due to lack of proper water supply and sewerage, are poor, unhealthy, unhygienic. Lack of infrastructure is also causing environmental pollution, overall poor quality of life. Poor environmental quality affects the urban poor more.</p> <p>The project intends to provide following benefits to the town population, and the “no project” alternative will deprive people of these benefits:</p> <ul style="list-style-type: none"> <li>• increased availability of potable water at appropriate pressure to all households including urban poor;</li> <li>• reduced time and costs in accessing alternative sources of water.</li> <li>• better public health particularly reduction in waterborne and infectious</li> </ul> |

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | <p>diseases;</p> <ul style="list-style-type: none"> <li>• reduced risk of groundwater contamination;</li> <li>• reduced risk of contamination of treated water supplies; and,</li> <li>• improvement in quality of water bodies due to disposal of treated effluent meeting disposal standards</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Selected Alternative        | <p>Without subproject would yield the town to be continuously under-serviced that puts the health of the general public at an increasing risk and could potentially worsen the living environment. This 'no project' scenario would impede further social and economic development of the district and the defer commitments to improve the proportion of the population with sustainable access to clean water and basic sanitation.</p> <p>Given the large-scale benefits to the population and environment, 'with project' alternative is considered appropriate</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>2</b>                    | <b>Alternative source of water</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Type of alternative         | 'Water source'                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Description of alternatives | <p><b>Groundwater.</b> At present water supply in Sardarshahar is fully groundwater based; 10.00 MLD of water is abstracted from 45 tube wells and open wells, while the water demand of the town estimated as 17.90 MLD (base year 2021) and 25.20 MLD (design year 2051). Depending entirely on groundwater for water supply is considered unsustainable.</p> <p><b>Surface water.</b> Indira Gandhi water canal under Indira Gandhi Nahar Project (IGNP) from thereon Sahwa lift Canal, emanate which is used to feed water to the existing WTP of 70 MLD capacity at Dhannasar (Dhannasar Water Treatment Plant).</p> <p><b>Combined ground and surface source – adoption of conjunctive use:</b> Either the groundwater or surface water is not able to fulfil the projected town demand, and therefore it is designed to utilize both the source optimally. That is 12 MLD water is provided from IGNP in year 2021 and 16 MLD for year 2051, and remaining supply gap will be met by tube wells/open wells. Additional rehabilitation of 26 tube wells are designed. Given less than 100% dependability of Surface water, in the low rainfall years, the deficit from the IGNP will be met by tube wells, and accordingly the water abstraction from groundwater sources will be increased as required.</p> |
| Selected Alternative        | <p>Selected source:</p> <p>Combined ground and surface source – Existing tube wells and open wells + new tube wells + Indira Gandhi Canal Project (IGNP) Water</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>3</b>                    | <b>Sewage treatment process</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Type of alternative         | Sewage treatment technology                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Description of alternatives | <p>Various secondary treatment technologies have been considered in the sewage treatment process after the primary treatment consisting of screening and grit removal. Secondary treatment is the critical process that removes the organic putrescible organic matters and brings down the BOD of the effluent to meet the discharge standards. Following process technologies considered: Waste Stabilization Ponds; Aerated Lagoons; Up Flow Anaerobic Sludge Blanket (UASBR) + FAL; Conventional Activated Sludge Process; and Cyclic Activated Sludge Process/Sequential Batch Reactor (SBR)</p> <p>A comparison of various treatment technologies is presented below in terms of merits of the process over key parameters like quality characteristics and land requirement:</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

|  | Item                                        | Conventional Activated Sludge                                                                                                                                                  | Extended Aeration                                                                                                                                                              | UASB followed by Facultative Aerobic Lagoon                                                                                                                                    | Cyclic Activated Sludge Process / SBR                                                         |
|--|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
|  | Performance (Typical)                       | Mostly stable                                                                                                                                                                  | Mostly stable                                                                                                                                                                  | Varying with temperature variations                                                                                                                                            | Complete Stable                                                                               |
|  | BOD                                         | <30 ppm                                                                                                                                                                        | <30 ppm                                                                                                                                                                        | <30 ppm                                                                                                                                                                        | <10 ppm                                                                                       |
|  | COD                                         | <250 ppm                                                                                                                                                                       | <250 ppm                                                                                                                                                                       | <250 ppm                                                                                                                                                                       | <100 ppm                                                                                      |
|  | Suspended solids                            | <50 ppm                                                                                                                                                                        | <50 ppm                                                                                                                                                                        | <100 ppm                                                                                                                                                                       | <10 ppm                                                                                       |
|  | Total Nitrogen                              | No Treatment                                                                                                                                                                   | No Treatment                                                                                                                                                                   | No Treatment                                                                                                                                                                   | <10 ppm                                                                                       |
|  | Total Phosphorous                           | No Treatment                                                                                                                                                                   | No Treatment                                                                                                                                                                   | No Treatment                                                                                                                                                                   | <2 ppm                                                                                        |
|  | Coliform removal, %                         | 60-90                                                                                                                                                                          | 60-90                                                                                                                                                                          | -                                                                                                                                                                              | 99.99%                                                                                        |
|  | Re-use Options                              | can only be used for low end usages like flushing and gardening tertiary treatment required for high and usages like construction water, industrial usages, cooling water etc. | can only be used for low end usages like flushing and gardening tertiary treatment required for high and usages like construction water, industrial usages, cooling water etc. | can only be used for low end usages like flushing and gardening tertiary treatment required for high and usages like construction water, industrial usages, cooling water etc. | Can be used for low end usages as well as for high end usages without any tertiary treatment. |
|  | Land requirement (m <sup>2</sup> /person)   | 0.1-0.18                                                                                                                                                                       | 0.08-0.15                                                                                                                                                                      | 0.2-0.25                                                                                                                                                                       | 0.035-0.07                                                                                    |
|  | Process Power requirement (kWh/person/year) | 12-15                                                                                                                                                                          | 16-19                                                                                                                                                                          | 4-5                                                                                                                                                                            | 6-8                                                                                           |
|  | Sludge handling                             | Sludge needs digestion prior to drying on beds or use mech. devices                                                                                                            | Digested sludge, dry on beds or use mech. devices                                                                                                                              | Digested sludge, dry on beds or use mech. Devices                                                                                                                              | Digested sludge, dry on beds or use mech. devices                                             |

|                               | Equipment requirement (excluding screening and grit removal)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Aerators, recycle pumps, scrapers, thickeners, digester, dryers, gas equipment                                                                         | Aerators, recycle pumps, sludge scrapers, (for large settlers)                                                     | Nil (gas collection optional)                                                                                                                                                                                | Diffuse aeration system, recycle sludge and waste sludge pumps, decanters                                                                                              |           |           |           |    |           |    |           |    |                      |    |                           |   |                               |                                    |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------|-----------|----|-----------|----|-----------|----|----------------------|----|---------------------------|---|-------------------------------|------------------------------------|
|                               | Operational characteristics                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Skilled Operation required                                                                                                                             | Simpler than activated sludge                                                                                      | Simpler than activated sludge                                                                                                                                                                                | Complete automatic operation by computer and PLC. Negligible manpower Intervention required                                                                            |           |           |           |    |           |    |           |    |                      |    |                           |   |                               |                                    |
|                               | Special features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Considerable equipment and skilled operation required especially if gas collection and usage involved. Method considered mainly for large sized plants | BOD removal high, effluent nitrified relatively high power requirement, favoured for small and medium sized plants | Minimal to negligible power requirement of the system makes it an economical alternative if gas revenue is neglected land requirement is also relatively small but depends on type of past treatment adopted | Highest treatment efficiency with crystal quality power requirement is 50% of conventional technologies land requirement is less than 50% of conventional technologies |           |           |           |    |           |    |           |    |                      |    |                           |   |                               |                                    |
| Selected Alternative          | <p>Selected processes: Sequential batch reactor (SBR)</p> <p>The genesis of selecting a suitable treatment process is primarily correlated with degree of treatment aimed to be achieved. In India, the latest court Order of April 2019 (NGT Order dated 30-04-2019) mandates all the civic authorities to adopt the treated sewage characteristics applicable are as shown in table below:</p> <table><tr><th>Paramater</th><th>Standards</th></tr><tr><td>BOD, mg/l</td><td>10</td></tr><tr><td>TSS, mg/l</td><td>20</td></tr><tr><td>COD, mg/l</td><td>50</td></tr><tr><td>Nitrogen-Total, mg/l</td><td>10</td></tr><tr><td>Phosphorus- Total, , mg/l</td><td>1</td></tr><tr><td>Faecal Coliform (MPN/ 100 ml)</td><td>100 Desirable<br/>230 (Permissible)</td></tr></table> <p>SBR provides highest treatment efficiency possible in a single step biological process. The system is operated in a batch reactor mode this eliminates all the inefficiencies of the continuous processes. A batch reactor is a perfect reactor, which ensures 100% treatment. Separate modules are provided to ensure continuous treatment. The complete process takes place in a single reactor, within which all biological treatment steps take place sequence. The complete biological operation is divided into cycles. Each cycle is of 3 – 5-hour duration, during which all treatment steps take place.</p> |                                                                                                                                                        |                                                                                                                    |                                                                                                                                                                                                              |                                                                                                                                                                        | Paramater | Standards | BOD, mg/l | 10 | TSS, mg/l | 20 | COD, mg/l | 50 | Nitrogen-Total, mg/l | 10 | Phosphorus- Total, , mg/l | 1 | Faecal Coliform (MPN/ 100 ml) | 100 Desirable<br>230 (Permissible) |
| Paramater                     | Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                        |                                                                                                                    |                                                                                                                                                                                                              |                                                                                                                                                                        |           |           |           |    |           |    |           |    |                      |    |                           |   |                               |                                    |
| BOD, mg/l                     | 10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                        |                                                                                                                    |                                                                                                                                                                                                              |                                                                                                                                                                        |           |           |           |    |           |    |           |    |                      |    |                           |   |                               |                                    |
| TSS, mg/l                     | 20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                        |                                                                                                                    |                                                                                                                                                                                                              |                                                                                                                                                                        |           |           |           |    |           |    |           |    |                      |    |                           |   |                               |                                    |
| COD, mg/l                     | 50                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                        |                                                                                                                    |                                                                                                                                                                                                              |                                                                                                                                                                        |           |           |           |    |           |    |           |    |                      |    |                           |   |                               |                                    |
| Nitrogen-Total, mg/l          | 10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                        |                                                                                                                    |                                                                                                                                                                                                              |                                                                                                                                                                        |           |           |           |    |           |    |           |    |                      |    |                           |   |                               |                                    |
| Phosphorus- Total, , mg/l     | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                        |                                                                                                                    |                                                                                                                                                                                                              |                                                                                                                                                                        |           |           |           |    |           |    |           |    |                      |    |                           |   |                               |                                    |
| Faecal Coliform (MPN/ 100 ml) | 100 Desirable<br>230 (Permissible)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                        |                                                                                                                    |                                                                                                                                                                                                              |                                                                                                                                                                        |           |           |           |    |           |    |           |    |                      |    |                           |   |                               |                                    |
| 4                             | Treated wastewater disposal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                        |                                                                                                                    |                                                                                                                                                                                                              |                                                                                                                                                                        |           |           |           |    |           |    |           |    |                      |    |                           |   |                               |                                    |



|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type of alternative         | Treated wastewater disposal – reuse applications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Description of alternatives | <p>(i) Discharge of treated wastewater into ponds / on land<br/>(ii) Reuse the treated wastewater in non-potable uses</p> <p>Rajasthan is a water scarce region and receives low rainfall. Recognizing the importance of treated wastewater in reducing the demand on water, Sewerage and Wastewater Policy, 2016, of Rajasthan promotes the reuse of treated sewage for non-potable applications, and to make sewerage projects environmentally sustainable. This policy prioritizes reuse in irrigation (agriculture, forestry, and landscaping), followed by fish farming, industry and non-potable domestic reuse. Policy suggests construction of storage tanks to store treated wastewater to facilitate reuse. Policy prescribes that the detailed project report (DPR) should clearly define the best reuse option specific to the town and prepare a Reuse Action Plan part of the DPR following water quality norms and legal implications.</p> <p>Accordingly, it is designed to utilize the treated wastewater for non-potable uses. A detailed Reuse Action Plan will be prepared during the detailed design phase, and, implemented. It is also designed that the excess / surplus treated wastewater which is not being utilized in reuse will be discharge into local drains/streams and necessary facilities – pipelines and pumping facilities, will be developed.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Selected Alternative        | Reuse in non-potable applications and discharge excess/surplus into local pond/drain                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>5</b>                    | <b>Project Locations</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Description of alternatives | <p>Location of designed infrastructure: The location of CWR, STP and SPS are selected to utmost consideration to energy efficiency. Gravity flow systems have been adopted. The sites are selected considering no involuntary resettlement.</p> <p><b>Location of CWRs, pump houses.</b> The designed clear water sumps, and pump house are located within the existing water supply facilities in Sardarshahar town. This are located Hanumangarh PHED Campus.</p> <p><b>STPs location.</b> Based on the technical feasibility of gravity flow system, sewerage system in Sardarshahar is designed and optimized with three sewage treatment plants (STPs). Site selection is guided by technical suitability, availability of government owned two existing STP sites and one vacant land, adequate land parcel, site away from habitation, and where there is a Pond to discharge the treated wastewater. The three selected sites are away from habitations and surrounded by agricultural lands (nearest house is 200 m from STP site North Campus, 1.9km from STP site at South campus and 250 m from STP site at Gandhi Vidhya Mandir campus). Although a 500 m distance away from habitation is desirable as far as possible, due to lack of suitable lands, and also considering the selected superior and compact sewage treatment technology (SBR), the three sites are selected.</p> <p><b>Water distribution and sewer lines.</b> Sewer and water supply pipes are designed along the roads/streets in the town within the road right of way (ROW). In wider roads water pipes will be laid in the road shoulder beside the tarmac, and in narrow roads, where there is no space, pipes will be laid in the road carriage way by break opening the tarmac. Sewers will be mostly laid in the centre of the road, away from water pipes. There are existing asbestos cement pipes underground, the alignment will be fine tuned during the detailed design, to avoid existing AC pipe alignments as far as possible.</p> |

#### IV. POLICY, LEGAL AND ADMINISTRATIVE FRAMEWORK

##### A. ADB Policy

45. ADB SPS requires that during the design, construction and operation of the project necessary compliance to all applicable laws and international conventions / treaties along with pollution prevention and control technologies and practices consistent with international good practice, are ensured.

46. **Screening and Categorization with that of ADB SPS 2009.** ADB uses a classification system to reflect the significance of a project's potential environmental impacts. A project's category is determined by the category of its most environmentally sensitive component, including direct, indirect, cumulative, and induced impacts in the project's area of influence. Each designed project is scrutinized as to its type, location, scale, and sensitivity and the magnitude of its potential environmental impacts. Projects are assigned to one of the following four categories:

- (i) **Category A.** A designed project is classified as category A if it is likely to have significant adverse environmental impacts that are irreversible, diverse, or unprecedented. These impacts may affect an area larger than the sites or facilities subject to physical works. An environmental impact assessment is required.
- (ii) **Category B.** A designed project is classified as category B if its potential adverse environmental impacts are less adverse than those of category A projects. These impacts are site-specific, few if any of them are irreversible, and in most cases mitigation measures can be designed more readily than for Category A projects. An initial environmental examination is required.
- (iii) **Category C.** A designed project is classified as category C if it is likely to have minimal or no adverse environmental impacts. No environmental assessment is required although environmental implications need to be reviewed.
- (iv) **Category FI.** A designed project is classified as category FI if it involves investment of ADB funds to or through a FI.

47. The environmental impacts of Sardarshahar town water supply and sewerage subproject have been identified and assessed as part of the planning and design process. An environmental assessment using ADB's Rapid Environmental Assessment Checklist for Water Supply and Sewerage (Appendix 1) was conducted, and results of the assessment show that the subproject is unlikely to cause significant adverse impacts. Thus, this IEE has been prepared in accordance with ADB SPS's requirements for environment category B projects.

48. **Environmental Management Plan.** An EMP which addresses the potential impacts and risks identified by the environmental assessment shall be prepared. The level of detail and complexity of the EMP and the priority of the identified measures and actions will be commensurate with the Project's impact and risks.

49. **Environmental Audit of Existing Facilities.** ADB SPS requires an environmental audit, if a subproject involves facilities and/or business activities that already exist or are under construction, including an on-site assessment to identify past or present concerns related to impacts on the environment. The objective of this compliance audit is to determine whether

actions were in accordance with ADB's safeguard principles and requirements for borrowers/clients, and to identify and plan appropriate measures to address outstanding compliance issues.

50. **Public Disclosure.** The IEE will be put in an accessible place (e.g., local government offices, libraries, community centers, etc.), and a summary translated into local language for the project affected people and other stakeholders. The following safeguard documents will be put up in ADB's website so that the affected people, other stakeholders, and the public can provide meaningful inputs into the project design and implementation:

- (i) For environmental category A projects, a draft EIA report at least 120 days before Board consideration;
- (ii) Final or updated EIA and/or IEE upon receipt; and
- (iii) Environmental monitoring reports submitted by the Project Management Unit (PMU) during project implementation upon receipt.

51. **Consultation and Participation.** ADB SPS require borrower to conduct meaningful consultation<sup>11</sup> with affected people and other concerned stakeholders, including civil society, and facilitate their informed participation. The consultation process and its results are to be documented and reflected in the environmental assessment report.

52. **Grievance Redress Mechanism.** ADB SPS require borrowers to establish a mechanism to receive and facilitate resolution of affected people's concerns, complaints, and grievances about the subproject's performance. The grievance mechanism shall be scaled to the risks and adverse impacts of the subproject.

53. **Monitoring and Reporting.** Borrower shall monitor, measure and document the implementation progress of the EMP. If necessary, the borrower shall identify the necessary corrective actions, and reflect them in a corrective action plan. Borrower shall prepare and submit to ADB semi-annual environmental monitoring reports that describe progress with implementation of the EMP and compliance issues and corrective actions, if any. For subprojects likely to have significant adverse environmental impacts during operation, reporting will continue at the minimum on an annual basis until ADB issues a project completion report.

54. **Unanticipated Environmental Impacts.** Where unanticipated environmental impacts become apparent during subproject implementation, ADB SPS requires the borrower to update the environmental assessment and EMP or prepare a new environmental assessment and EMP to assess the potential impacts, evaluate the alternatives, and outline mitigation measures and resources to address those impacts.

55. **Occupational Health and Safety.** ADB SPS requires the borrower<sup>12</sup> to ensure that workers<sup>13</sup> are provided with a safe and healthy working environment, considering risks inherent

---

<sup>11</sup>Per ADB SPS, 2009, meaningful consultation means a process that (i) begins early in the project preparation stage and is carried out on an ongoing basis throughout the project cycle; (ii) provides timely disclosure of relevant and adequate information that is understandable and readily accessible to affected people; (iii) is undertaken in an atmosphere free of intimidation or coercion; (iv) is gender inclusive and responsive, and tailored to the needs of disadvantaged and vulnerable groups; and (v) enables the incorporation of all relevant views of affected people and other stakeholders into decision making, such as project design, mitigation measures, the sharing of development benefits and opportunities, and implementation issues

<sup>12</sup>In case where responsibility is delegated to subproject contractors during construction phase, borrower shall

to the sector and specific classes of hazards in the subproject work areas, including physical, chemical, biological, and radiological hazards. Borrower shall take steps to prevent accidents, injury, and disease arising from, associated with, or occurring during the course of work, including: (i) identifying and minimizing, so far as reasonably practicable, the causes of potential hazards to workers; (ii) providing preventive and protective measures, including modification, substitution, or elimination of hazardous conditions or substances; (iii) providing appropriate equipment to minimize risks and requiring and enforcing its use; (iv) training workers and providing them with appropriate incentives to use and comply with health and safety procedures and protective equipment; (v) documenting and reporting occupational accidents, diseases, and incidents; and (vi) having emergency prevention, preparedness, and response arrangements in place.

**56. Community Health and Safety.** ADB SPS requires the borrower to identify and assess risks to, and potential impacts on, the safety of affected communities during the design, construction, operation, and decommissioning of the subproject, and shall establish preventive measures and plans to address them in a manner commensurate with the identified risks and impacts.

**57. Physical Cultural Resources.** Borrower is responsible for siting and designing the subproject to avoid significant damage to physical cultural resources. ADB SPS requires that such resources likely to be affected by the subproject are identified, and qualified and experienced experts assess the subproject's potential impacts on these resources using field-based surveys as an integral part of the environmental assessment process. When the designed location of a subproject component is in areas where physical cultural resources are expected to be found as determined during the environmental assessment process, chance finds procedures shall be included in the EMP.

**58. ADB SPS International Best Practice Requirements.** ADB SPS requires that, during the design, construction, and operation of the project, the executing agency shall apply pollution prevention and control technologies and practices that are consistent with international good practice, as reflected in internationally recognized standards such as the World Bank Group's Environment, Health and Safety Guidelines. (IFC's General EHS Guidelines<sup>14</sup> and Sector Specific (Water and Sanitation) Guidelines<sup>15</sup>). These standards contain performance levels and measures that are normally acceptable and applicable to projects. These standards contain performance levels and measures that are normally acceptable and applicable to projects. When Government of India regulations differ from these levels and measures, the PMU and PIUs will achieve whichever is more stringent. If less stringent levels or measures are appropriate in view of specific project circumstances, the PMU and PIUs will provide full and detailed justification for any designed alternatives that are consistent with the requirements presented in ADB SPS.

---

ensure that the responsibilities on occupational health and safety are included in the contract documents

<sup>13</sup>Including nonemployee workers engaged by the borrower/client through contractors or other intermediaries to work on project sites or perform work directly related to the project's core functions.

<sup>14</sup><https://www.ifc.org/wps/wcm/connect/554e8d80488658e4b76af76a6515bb18/Final%2B-%2BGeneral%2BEHS%2BGuidelines.pdf?MOD=AJPERES>

<sup>15</sup><https://www.ifc.org/wps/wcm/connect/e22c050048855ae0875cd76a6515bb18/Final%2B-%2BWater%2Band%2BSanitation.pdf?MOD=AJPERES>



## B. National Laws

59. The implementation of the subprojects will be governed by Government of India and State of Rajasthan and other applicable environmental acts, rules, regulations, and standards. These regulations impose restrictions on the activities to minimize or mitigate likely impacts on the environment. It is the responsibility of the project executing and implementing agencies to ensure subprojects are consistent with the legal framework, whether applicable international, national, state or municipal or local. Key standards include those related to drinking water quality, air quality, effluent discharge, and protected areas. Compliance is required in all stages of the subprojects including design, construction, and operation and maintenance.

60. **Environmental assessment.** The Government of India EIA Notification of 2006 (replacing the EIA Notification of 1994), sets out the requirement for Environmental Assessment in India. This states that Environmental Clearance (EC) is required for specified activities/projects, and this must be obtained before any construction work or land preparation (except land acquisition) may commence. Projects are categorized as A or B depending on the scale of the project and the nature of its impacts.

61. **Category A projects.** require EC from the central Ministry of Environment, Forests and Climate Change (MoEFCC). The proponent is required to provide preliminary details of the project in the prescribed manner with all requisite details, after which an Expert Appraisal Committee (EAC) of the MoEFCC prepares comprehensive Terms of Reference (ToR) for the EIA study. On completion of the study and review of the report by the EAC, MoEFCC considers the recommendation of the EAC and provides the EC if appropriate.

62. **Category B projects** require environmental clearance from the State Environment Impact Assessment Authority (SEIAA). The State level EAC categorizes the project as either B1 (requiring EIA study) or B2 (no EIA study) and prepares ToR for B1 projects within 60 days. On completion of the study and review of the report by the EAC, the SEIAA issues the EC based on the EAC recommendation. The Notification also provides that any project or activity classified as category B will be treated as category A if it is located in whole or in part within 10 km from the boundary of protected areas, notified areas or inter-state or international boundaries.

63. None of the components of this water supply and sewerage system subproject falls under the ambit of the EIA Notification 2006, and, therefore EIA Study or EC is not required for the subproject.

64. **Applicable environmental regulations.** Besides EIA Notification 2006, there are various other acts, rules, policies and regulations currently in force in India that deal with environmental issues that could apply to infrastructure development. The specific regulatory compliance requirements of the subproject are shown in Table 5.

**Table 6: Applicable Environmental Regulations**

| <b>Law</b>                                                                                                                             | <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <b>Requirement</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>Relevance to Project Phase</b> |
|----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| National Environment Policy (NEP), 2006.                                                                                               | NEP is a comprehensive guiding document in India for all environmental conservation programs and legislations by Central, State and Local Government. The dominant theme of this policy is to promote betterment of livelihoods without compromising or degrading the environmental resources. The policy also advocates collaboration method of different stakeholders to harness potential resources and strengthen environmental management.                                                                                                                                                                                                                                                                                                                                           | RSTDSP should adhere to NEP principle of “enhancing and conservation of environmental resources and abatement of pollution”.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | All phases of project             |
| Rajasthan State Environment Policy, 2010 including And Rajasthan Environment Mission and Climate Change Agenda for Rajasthan (2010-14) | Follows the National Environment Policy, 2006 and core objectives and policies are: -Conserve and enhance environmental resources; assure environmental sustainability of key economic sectors; and, improve environmental governance and capacity building<br>- it recommends specific strategies and actions to address the key environmental issues: water resources, desertification and land degradation, forest and biodiversity, air quality, climate change: adoption and mitigation, mining, industry, tourism, energy, urban development, etc.<br>- Establishment of Environment Mission under the chairpersonship of the Chief Minister and a Steering Committee under the chairpersonship of Chief Secretary, Government of Rajasthan<br>Tasks force set up for six key areas | Project implementation should adhere to the policy aims of: conservation and enhancement of environmental resources, integration of environmental concerns into projects/plans, and capacity building in environmental management.<br><br>Under water sector, major concerns, as the policy notes, are huge water losses and wastage, declining water availability, pollution.<br><br>Relevant recommendations for the project include control of losses, integrated water resources management, control of raw water pollution, reuse and recycling.<br><br>Avoid/minimize use of forest lands.<br><br>With reference to climate change adoption and mitigation following should be considered in the project: (i) diminishing flows in surface water bodies, and groundwater depletion, and revival traditional water bodies as water sources (lakes/tanks); (ii) equal stress on demand side management in water; and (iii) minimize energy <b>use - design energy efficiency systems.</b> | All phases of project             |
| EIA Notification                                                                                                                       | Projects indicated in the schedule of this notification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | None of the components of this subproject                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | -                                 |

| Law                                                                                           | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Relevance to Project Phase |
|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
|                                                                                               | requires EIA study and environmental clearance.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | falls under the ambit of the notification; no EIA study or environmental clearance required                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                            |
| Water (Prevention and Control of Pollution) Act of 1974, Rules of 1975, and amendments (1987) | <p>Act was enacted to provide for the prevention and control of water pollution and the maintaining or restoring of wholesomeness of water, by Central and State Pollution Control Boards and for conferring on and assigning to CPCB/SPCBs powers and functions relating to water pollution control.</p> <p>Control of water pollution is achieved through administering conditions imposed in consent issued under provision of the Water (Prevention and Control of Pollution) Act of 1974. These conditions regulate the quantity and quantity of effluent, the location of discharge and the frequency of monitoring of effluents. Any component of the subproject having the potential to generate sewage or trade effluent will come under its purview. Such projects have to obtain Consent to establish (CTE) under Section 25 of the Act from Rajasthan State Pollution Control Board (RSPCB) before starting implementation and Consent to Operate (CTO) before commissioning.</p> | <p>Designed three STPs will require CTE (prior to start of construction works) and CTO (prior to start of operation) from Rajasthan State Pollution Control Board (RSPCB)</p> <p>Upgradation of two STPs requires modification of existing CTE and CTO</p> <p>All relevant forms, prescribed fees and procedures to obtain the CTE and CTO can be found in the RSPCB website. (<a href="http://environment.rajasthan.gov.in">http://environment.rajasthan.gov.in</a>)</p>                                                                                                                                                                    | Construction and Operation |
| Air (Prevention and Control of Pollution) Act of 1981, Rules of 1982 and amendments.          | <p>This Act was enacted to achieve prevention, control and abatement of air pollution activities by assigning regulatory powers to Central and State boards for all such functions. The Act also establishes ambient air quality standards.</p> <p>The projects having potential to emit air pollutants into the atmosphere have to obtain CTE and CTO under Section 21 of the Act from RSPCB. The occupier of the project/facility has the responsibility to adopt necessary air pollution control measures for abating air pollution.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <p>The following will require CTE and CTO from RSPCB: (i) Diesel generators; (ii) Batching Plant hot mix plants; and (iii) stone crushers, if installed for construction.</p> <p>All relevant forms, prescribed fees and procedures to obtain the CTE and CTO can be found in the RSPCB website (<a href="http://environment.rajasthan.gov.in">http://environment.rajasthan.gov.in</a>)</p> <p>If ready mix concrete and hot mix bitumen is procured from third party, contractor to ensure that the plants, from where material is being purchased is having CTE/CTO and copy should be collected from third party and submitted in PIU</p> | Construction and operation |
| Biodiversity Act of 2002                                                                      | This Act primarily addresses access to genetic resources and associated knowledge by foreign                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Not Applicable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | -                          |

| Law                                                                                         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Requirement                                                                                                                                                                                                     | Relevance to Project Phase |
|---------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
|                                                                                             | individuals, institutions or companies, to ensure equitable sharing of benefits arising out of the use of these resources and knowledge to the country and the people.                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                 |                            |
| Wildlife Protection Act, 1972 and amendment 1991                                            | This overarching Act provides protection to wild animals, birds, plants and matters connected with habitat protection, processes to declare protected areas, regulation of wildlife trade, constitution of state and national board for wildlife, zoo authority, tiger conservation authority, penalty clauses and other important regulations.                                                                                                                                                                                      | Not applicable – none of the project components are located in or near protected areas.<br><br>Nearest protected areas is Tal Chhapar Wildlife Sanctuary, about 70 km (aerial distance) from Sardarshahar Town. | Construction               |
| Forest (Conservation) Act, 1980                                                             | The Forest (Conservation) Act prohibits the use of forest land for non-forest purposes without the approval of Ministry of Environment Forests and Climate Change (MoEFCC), Government of India                                                                                                                                                                                                                                                                                                                                      | Not applicable; none of the components of the subproject are located in forest.                                                                                                                                 | Construction               |
| Environmental (Protection) Act, 1986 amended in 1991 and the following rules/notifications: | This is an “umbrella” legislation that empowers the Central Government to take all necessary measures to protect and improve the quality of the environment and prevent, control and abate environmental pollution. Empowers central government to enact various rules to regulate environmental pollution, including standards for quality of air, water, noise, soil; discharge standards or allowable concentration limits for environmental pollutants, handling of hazardous substances, locating/prohibiting industries, etc., | There are rules / notifications that have been brought out under this Act, which are relevant to RSTDSP, and are listed below                                                                                   | Construction and operation |
| Environmental Standards (ambient and discharge).                                            | Emissions and discharges from the facilities to be created or refurbished or augmented shall comply with the notified standards                                                                                                                                                                                                                                                                                                                                                                                                      | Appendix 4 provides applicable standards for ambient air quality, emission limits and emission stack height requirements for diesel generators<br><br>Appendix 5 provides STP discharge standards               | Construction and operation |
| Noise Pollution (Regulation and Control) Rules, 2000 amended up to 2010.                    | Rule 3 of the Act specifies ambient air quality standards in respect of noise for different areas/zones.                                                                                                                                                                                                                                                                                                                                                                                                                             | Appendix 6 provides applicable noise standards, and noise limits for diesel generators                                                                                                                          | Construction and operation |
| Solid Waste Management Rules                                                                | Responsibility of Solid Waste Generator segregate and store the waste generated in three                                                                                                                                                                                                                                                                                                                                                                                                                                             | Contractor to follow all the rules during construction works                                                                                                                                                    | Construction and operation |

| Law                                                      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Relevance to Project Phase |
|----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| 2016                                                     | <p>separate streams namely bio-degradable, non-biodegradable and domestic hazardous wastes in suitable bins and handover segregated wastes to authorized waste pickers or waste collectors as per the direction or notification by the local authorities from time to time;</p> <p>store separately construction and demolition waste, as and when generated, in his own premises and shall dispose off as per the Construction and Demolition Waste Management Rules, 2016; (iii) No waste generator shall throw, burn or bury the solid waste generated by him, on streets, open public spaces outside his premises or in the drain or water bodies.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                            |
| Construction and Demolition Waste Management Rules 2016  | <p>Every waste generator shall segregate construction and demolition waste and deposit at collection centre or handover it to the authorized processing facilities</p> <p>Shall ensure that there is no littering or deposition so as to prevent obstruction to the traffic or the public or drains</p> <p>Large generators (who generate more than 20 tons or more in one day or 300 tons per project in a month) shall submit waste management plan and get appropriate approvals from the local authority before starting construction or demolition or remodeling work,</p> <p>Large generators shall have environment management plan to address the likely environmental issues from construction, demolition, storage, transportation process and disposal / reuse of Cand D Waste.</p> <p>Large generators shall segregate the waste into four streams such as concrete, soil, steel, wood and plastics, bricks and mortar,</p> <p>Large generators shall pay relevant charges for collection, transportation, processing and disposal as notified by the concerned authorities;</p> | <p>Construction waste shall be collected at stockpile area for 8-10 days and will be sent to disposal site. Disposal site shall be identified and allotted by Municipal Council after mobilization of contractor (during SIP period) and can't be mentioned at this time.</p> <p>Contractor to follow all the rules during construction works.</p> <p>Sludge or any material if classified as hazardous waste / material is to be handled and disposed according to this Rules</p> <p>Excerpts from C and D Rules are provided in Appendix 7.</p> | Construction               |
| Hazardous and Other Wastes (Management and Transboundary | <p>Responsibilities of the occupier for management of hazardous and other wastes.- (1) For the management of hazardous and other wastes, an occupier shall follow the following steps, namely:- (a) prevention; (b)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <p>Contractor to comply all the requirements of this Act during construction works.</p> <p>There are asbestos cement (AC) in the</p>                                                                                                                                                                                                                                                                                                                                                                                                              | Construction and operation |




| Law                                                | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Relevance to Project Phase |
|----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| Movement) Rules, 2016,                             | <p>minimization; (c) reuse, (d) recycling; (e) recovery, utilization including co-processing; (f) safe disposal. (2) The occupier shall be responsible for safe and environmentally sound management of hazardous and other wastes. (3) The hazardous and other wastes generated in the establishment of an occupier shall be sent or sold to an authorized actual user or shall be disposed of in an authorized disposal facility. (4) The hazardous and other wastes shall be transported from an occupier's establishment to an authorized actual user or to an authorized disposal facility in accordance with the provisions of these rules. (5) The occupier who intends to get its hazardous and other wastes treated and disposed of by the operator of a treatment, storage and disposal facility shall give to the operator of that facility, such specific information as may be needed for safe storage and disposal. (6) The occupier shall take all the steps while managing hazardous and other wastes to-</p> <p>6 (a) contain contaminants and prevent accidents and limit their consequences on human beings and the environment; and (b) provide persons working in the site with appropriate training, equipment and the information necessary to ensure their safety.</p> | <p>existing water supply system.</p> <p>As per these Rules, any waste with asbestos concentration limit exceeding 10,000 mg/kg (i.e. 1%), and is in the form of friable, powdered or finely divided state, is classified as hazardous waste.</p> <p>As per Bureau of Indian Standards (BIS), "AC pipes generally contain about 10-15% asbestos fibers in a cement matrix that comprises the rest of the materials and are termed as locked in asbestos products as these products have the asbestos fibers bound in cement. There is very little possibility of generation of airborne asbestos fibers during any reasonable handling, storage, and use of such products. However, during storing and installation, recommended work practices shall be followed to avoid harmful exposure".</p> <p>There are large amount AC pipes are stored in PHED Hanumangarh road campus and about 5 km were laid underground. In RSTDSP, no AC pipes are designed, existing AC pipes will be left as it is. However, stored AC pipes may have to removed / handled, and if such waste pipes confirm to the provisions of this act, waste shall be treated as hazardous waste and disposed as per the rules.</p> |                            |
| Wetlands (Conservation and Management) Rules, 2017 | <p>The Rules specify activities which are harmful and prohibited in the wetlands such as industrialization, construction, dumping of untreated waste and effluents, and reclamation. The Central Government may permit any of the prohibited activities on the recommendation of Central Wetlands Regulatory Authority.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <p>Not applicable as subprojects components are not located in or near to designated wetland area.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                            |
| Ancient Monuments and Archaeological               | <p>The Act designates areas within 100 meters (m) of the "protected monument/area" as "prohibited area" and</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <p>Not applicable - there are no protected monuments / places of archeological /</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Construction               |

| Law                                                                                                                          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Relevance to Project Phase |
|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| Sites and Remains Act, 1958 and Ancient Monuments and Archaeological Sites and Remains (Amendment and Validation) Act, 2010. | beyond that up to 200 m as “regulated area” respectively. No “construction” is permitted in the “prohibited area” and any construction activity in the “regulated area” requires prior permission of the Archaeological Survey of India (ASI).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | historical places in or near Sardarshahar Town<br><br>In case of chance finds, the contractor/ PIU will be required to follow a protocol as defined in the Environmental Management Plan (EMP)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                            |
| The Building and Other Construction Workers (BOCW) Act 1996 and Rajasthan Building and Construction Workers Rules 2009       | Employer shall-<br>Provide and maintain, at suitable point, sufficient quantity of wholesome drinking water, such point shall be at least 6 meters away from any washing areas, urinals or toilets<br>Provide sufficient urinals and latrines at convenient place, easily accessible by workers<br>Provide free of charge, temporary living accommodations near to work sites with separate cooking place, bathing and lavatory facilities and restore the site as preconditions after completing the construction works<br>Provide crèche with proper accommodation, ventilation, lighting, cleanliness and sanitation if more than fifty female workers are engaged<br>Provide first aid facilities in all construction sites<br>For safety of workers employer shall provide-<br>Safe access to site and workplace<br>Safety in demolition works<br>Safety in use of explosives<br>Safety in operation of transporting equipment and appoint competent person to drive or operate such vehicles and equipment<br>Safety in lifting appliance, hoist and lifting gears<br>Adequate and suitable lighting to every workplace and approach<br>Prevention of inhalation of dust, smoke, fumes, gases during construction works and provide adequate ventilation in workplace and confined space<br>Safety in material handling and stacking/unstacking | Contractors are required to follow all the provisions of BOCW Act and Rajasthan BOCW Rules. Salient features of Rajasthan BOCW Rules are-<br>Chapter III, section 17- Registration of establishments<br>Chapter VIII, section 61- Hours of works, intervals or rest and spread over, overtime<br>Section 62- weekly rest<br>Section 63- night shift<br>Section 67- registers of workers<br>Section 68- Muster roll, wages register<br>Section 70- latrine and urinal facilities<br>Chapter XI- Safety and Health<br>Section 78- fire protection<br>Section 79- emergency action plan<br>Section 80- fencing of motors<br>Section 81- lifting and carrying of weight<br>Section 82- H & S policy<br>Section 83- dangerous and harmful environment<br>Section 84- Overhead protection<br>Section 88- eye protection<br>Section 89- PPEs<br>Section 90- electrical hazards<br>Section 97- use of safety helmets and shoes<br>Chapter XIII-lifting appliances and gears<br>Chapter XV- transport and earth moving equipment<br>Chapter XVI- concrete works | Construction               |

| Law                                                                                                                                                               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Relevance to Project Phase |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
|                                                                                                                                                                   | <p>Safeguarding the machinery with flywheel of moving parts</p> <p>Safe handling and use of plants operated by compressed air</p> <p>Fire safety</p> <p>Limit of weight to be lifted by workers individually</p> <p>Safety in electric wires, apparatus, tools and equipment</p> <p>Provide safety net, safety sheet, safety belts while working at height (more than 1.6 m as per OSHA)</p> <p>Providing scaffolding, ladders and stairs, lifting appliances, chains and accessories where required</p> <p>Safety in pile works, concrete works, hot asphalt, tar, insulation, demolition works, excavation, underground construction and handling materials</p> <p>Provide and maintain medical facilities for workers</p> <p>Any other matters for the safety and health of workers</p> | <p>Chapter XVII- demolition works</p> <p>Chapter XVIII-Excavation and tunneling</p> <p>Chapter XX- ladders and step ladders</p> <p>Chapter XXII- structural frame and formworks</p> <p>Chapter XXIV- medical facilities and first aid box</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                            |
| <p>Contract Labor (Regulation and Abolition) Act, 1970;</p> <p>The Inter-State Migrant Workmen (Regulation of Employment and Conditions of Service) Act, 1979</p> | <p>Provides for welfare measures to be provided by the Contractor to contract labor and in case the Contractor fails to provide, the same are required to be provided by the Principal Employer by Law. The principal employer is required to take Certificate of Registration and the Contractor is required to take a License from the designated Officer. The Act is applicable to the establishments or Contractor of principal employer if they employ 20 or more contract labor.</p> <p>The inter-state migrant workmen, in an establishment to which this Act becomes applicable, are required to be provided certain facilities such as housing, medical aid, traveling expenses from home up to the establishment and back, etc.,</p>                                             | <p>Applicable to all construction works in the project</p> <p>Principle employer (RUDSICO-EAP) to obtain Certificate of Registration from Department of Labour, as principle employer</p> <p>Contractor to obtain license from designated labor officer</p> <p>Contractor shall register with Labor Department, if Inter-state migrant workmen are engaged</p> <p>Adequate and appropriate amenities and facilities shall be provided to workers including housing, medical aid, traveling expenses from home and back, etc.,</p> <p>Appendix 8 provides applicable labor laws including amendments issued from time to time applicable to establishments engaged in construction of civil works.</p> | Construction and operation |
| The Child Labour (Prohibition and Regulation) Act,                                                                                                                | <p>Prohibits employment of children below 14 years of age in certain occupations and processes</p> <p>Employment of child labor is prohibited in building and</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | No child labour shall be employed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Construction and operation |

| Law                                                                                                                                                         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                    | Requirement                                                                                                                                                                                                                                                                                                       | Relevance to Project Phase |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| 1986                                                                                                                                                        | construction Industry.                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                   |                            |
| Minimum Wages Act, 1948                                                                                                                                     | Minimum wages fixed by appropriate Government as per provisions of the Act if the employment is a scheduled employment. Construction of buildings, roads and runways are scheduled employment.                                                                                                                                                                                                                                                 | Applicable to all construction works in the project<br>All construction workers should be paid not less than the prescribed minimum wage                                                                                                                                                                          | Construction and operation |
| Workmen Compensation Act, 1923                                                                                                                              | Provides for compensation in case of injury by accident arising out of and during the course of employment.                                                                                                                                                                                                                                                                                                                                    | Compensation for workers in case of injury by accident                                                                                                                                                                                                                                                            | Construction and operation |
| Equal Remuneration Act, 1979                                                                                                                                | Provides for payment of equal wages for work of equal nature to male and female workers and not for making discrimination against female employees in the matters of transfers, training and promotions etc.                                                                                                                                                                                                                                   | Equal wages for work of equal nature to male and female workers                                                                                                                                                                                                                                                   | Construction and operation |
| The Rajasthan Monuments, Archaeological Sites and Antiquities Act, 1961; the Rajasthan Monuments, Archaeological Sites and Antiquities (amendment) Act 2007 | Any construction/excavation work in the 'protected area' (as declared by GoR under the Act) requires prior permission of Department of Archeology and Museums -Application under the Rules shall be submitted to Director, State Archeological Department, at least 3 months prior to the work. Department provides conditional permission, including time for completion, procedures to be followed during the work and for chance finds etc. | Not applicable - there are no protected monuments in the town<br><br>In case of chance finds, the contractor/ PIU will be required to follow a protocol as defined in the Environmental Management Plan (EMP).                                                                                                    | Construction               |
| Rajasthan Forest Act, 1953, and Rajasthan Forest Rules, 1962                                                                                                | This Act makes the basis for declaration of Reserved Forests, constitution of village forest committees, management of reserved forests and penalties and procedures.                                                                                                                                                                                                                                                                          | Not applicable; none of the components / pipeline alignment are in forest areas.                                                                                                                                                                                                                                  | Construction               |
| IS 11768: 1986/2005: Recommendations for disposal of asbestos waste material                                                                                | The standard emphasizes that every employer who undertakes work which is liable to generate asbestos containing waste, shall undertake adequate steps to prevent and /or reduce the generation of airborne dust during handling, storing, transportation and final disposal of final disposal of asbestos and asbestos containing products.                                                                                                    | The crux is waste avoidance: the practice inculcated should focus on minimal waste generation.<br><br>Waste Collection: In the project circumstance, the waste is referred to the damaged powered asbestos which will be collected in the Permissible plastic bags to be disposed to the nearest TSDF facilities. | Construction               |
| IS 12081: Pictorial Warning to be                                                                                                                           | The objective of the caution is to make the person handling to take all pre-cautionary measures and make                                                                                                                                                                                                                                                                                                                                       | The following signs and personal protective equipment shall be used in handling ACM.                                                                                                                                                                                                                              | Construction               |
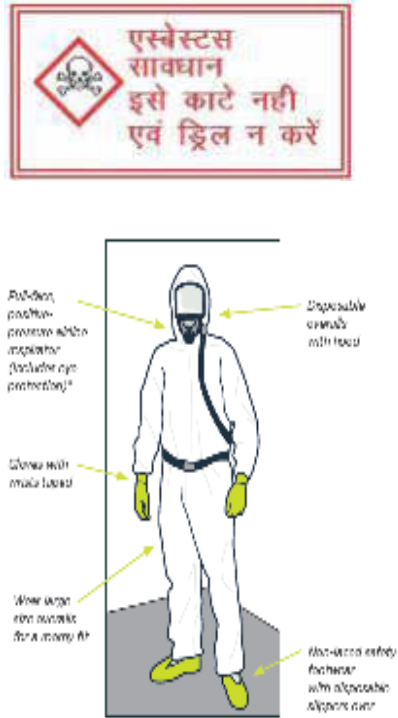
| Law                                                                                                          | Description                                                                                        | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Relevance to Project Phase |
|--------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| implemented on equipment containing Asbestos Contaminated Products.                                          | them aware of all the possible risk.                                                               |  <p>The image contains two parts. The top part is a rectangular warning sign with a red border. Inside, there is a skull and crossbones symbol on the left. To its right, the text in Hindi reads 'एस्बेस्टस सावधान' (Asbestos Caution) and below it, 'इसे काटे नही एवं ड्रिल न करें' (Do not cut or drill it). The bottom part is a diagram of a person wearing a full-body white protective suit. Yellow arrows point to various parts of the suit with labels: 'Respirator protection which includes eye protection', 'Disposable coveralls with hood', 'Gloves with sealed wrist', 'Shoe cover not touching the ground', and 'Disposable safety footwear with disposable slip-on cover'.</p> |                            |
| IS 11451: Safety and Health Requirements related to Occupational Exposure to Asbestos contaminated Products. | This standard details the occupational exposure allowable and safety at work place to be enforced. | In the project the norms pertaining to limiting number of hours working with ACM will be 8.0 hrs/48 hrs a week and the medical examination has to be periodic, the environmental monitoring has to be done as per the protocol. The safety at work place shall be enforced.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Construction               |
| IS 11768: Waste Disposal Procedure for Asbestos Containing                                                   | The protocol pertaining to disposal of the waste is emphasized.                                    | The collection of ACM powered will be in permissible plastic bags, which will be twisted tight at the neck so that the wear and tear due to abrasion will be minimum and the                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Construction               |



| Law                                                                                           | Description                                                                                                                                                                                                                                                                                                                                                                                 | Requirement                                                                                                                                                                                                                                                                                        | Relevance to Project Phase |
|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| Products.                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                             | transportation of the asbestos waste has to be done by the authorized vendor to the approved landfill site.                                                                                                                                                                                        |                            |
| International conventions and treaties                                                        |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                    |                            |
| Ramsar Convention, 1971                                                                       | The Ramsar Convention is an intergovernmental treaty that provides the framework for national action and international co-operation for the conservation and wise use of wetlands and their resources. India is one of the signatories to the treaty. The Ramsar convention made it mandatory for the signatory countries to include wetland conservation in their national land use plans. | There are no Ramsar sites in or near Sardarshahar. Not applicable to Sardarshahar water supply and sewerage subproject.                                                                                                                                                                            | -                          |
| Convention on International Trade in Endangered Species of Wild Fauna and Flora (CITES), 1973 | India is a signatory of this convention which aims to control international commercial trade in endangered species                                                                                                                                                                                                                                                                          | Not applicable in this project as no endangered species of wild fauna and flora is found in project town.                                                                                                                                                                                          | -                          |
| Montreal Protocol 1992                                                                        | India is a signatory of this convention which aims to reduction in the consumption and production of ozone-depleting substances (ODS), while recognizing differences in a nation's responsibilities. Ozone depleting substances are divided in two groups Chlorofluorocarbons (CFCs) and Hydrochlorofluorocarbon carbons (HCFCs)                                                            | Not applicable in this project as no ODS are involved in construction works                                                                                                                                                                                                                        | -                          |
| Basel Convention on Trans-boundary Movement of Hazardous Wastes, 1989                         | India is a signatory of this convention which aims to reduce trans-boundary movement and creation of hazardous wastes                                                                                                                                                                                                                                                                       | Contractor to follow the provisions of Hazardous Waste Rules 2016 for storage, handling, transport and disposal of any hazardous waste emerged during construction works<br><br>Under this Convention, asbestos or asbestos waste in the form of dust and fibers is classified as hazardous waste. | -                          |
| Convention on Migratory Species of Wild Animals (CMS), 1979 (Bonn convention)                 | CMS, also known as Bonn convention, was adopted in 1979 and entered into force on 1 November 1983, which recognizes that states must be the protectors of migratory species that live within or pass through their national jurisdictions, and aims to conserve terrestrial,                                                                                                                | Not applicable to this project as no migratory species of wild animals are reported in the project areas.                                                                                                                                                                                          | -                          |

| Law | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Requirement | Relevance to Project Phase |
|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------------------------|
|     | <p>marine and avian migratory species throughout their ranges. Migratory species threatened with extinction are listed on Appendix I of the Convention. CMS Parties strive towards strictly protecting these species, conserving or restoring the places where they live, mitigating obstacles to migration and controlling other factors that might endanger them. Migratory species that need or would significantly benefit from international cooperation are listed in Appendix II, and CMS encourages the Range States to conclude global or regional agreements.</p> |             |                            |

65. **Clearances / permissions to be obtained prior to start of construction.** Table 6 shows the list of clearances/permissions required for project construction. This list is indicative, and the contractor should ascertain the requirements prior to start of the construction and obtain all necessary clearances/permission prior to start of construction.

**Table 7: Clearances and permissions required for Construction activities**

| S. No | Construction Activity                                  | Statute under which Clearance is Required                                                                                                 | Implementation                                                           | Supervision |
|-------|--------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-------------|
| 1.    | Construction of three new STPs                         | Consent to establish and consent to operate under Water Act, 1974 from RSPCB                                                              | PIU and Contractor                                                       | PIU         |
| 2.    | Upgradation of existing two STPs                       | Modification in Consent to establish and consent to operate under Water Act, 1974 from RSPCB                                              | PIU and Contractor                                                       | PIU         |
| 3.    | Land for project activity                              | Allotment and approval for specific land use                                                                                              | ULB                                                                      | PMU         |
| 4.    | Use of construction area                               | Approval for use of city roads and shifting of utilities                                                                                  | ULB, PWD and other utility agencies such as BSNL, electricity department | PIU         |
| 5.    | Establishment of construction camps                    | Allotment and approval for specific land use                                                                                              | Contractor                                                               | PIU         |
| 6.    | Tree Cutting                                           | State forest department/Revenue (Tehsildar)                                                                                               | PIU                                                                      | PIU and PMU |
| 7.    | Hot mix plants, Crushers, Batching plants & DG set     | Consent to establish and consent to operate under Air Act, 1981 from RSPCB                                                                | Contractor                                                               | PIU         |
| 8.    | Storage, handling and transport of hazardous materials | Hazardous Wastes (Management and Handling) Rules. 2016<br>Manufacturing, Storage and Import of Hazardous Chemicals Rules, 1989 from RSPCB | Contractor                                                               | PIU         |
| 9.    | Use of vehicle and equipment                           | Pollution under control certificate (PUC) form RTO                                                                                        | Contractor                                                               | PIU         |
| 10.   | Temporary traffic diversion measures                   | Temporary traffic diversion measure including use of alternate road from District traffic police                                          | Contractor                                                               | PIU         |
| 11.   | Sand mining, quarries and borrow areas                 | Permission from District Collector/ State Department of Mines & Geology                                                                   | Contractor                                                               | PIU         |
| 12.   | New quarries and borrow areas                          | Environmental clearance under EIA Notification 2006                                                                                       | Contractor                                                               | PIU         |
| 13.   | Temporary traffic diversion measures                   | District traffic police                                                                                                                   | Contractor                                                               | PIU         |
| 14.   | Construction Waste and Demolition Debris Management    | Approval from Municipal Council for disposal site is required per Construction and Demolition Waste Management Rules 2016                 | Contractor                                                               | PIU         |

66. PMU will ensure all necessary regulatory clearances and approvals are obtained prior to commencement of works. Respective PIUs, with support of project consultants and DBO contractors, are responsible for obtaining the clearances/permits and ensuring conditions/specifications/provisions are incorporated in the subproject design, costs, and implementation. The PIUs shall report to PMU the status of compliance to clearances/permits as part of the regular progress reporting.

## V. DESCRIPTION OF THE ENVIRONMENT


### A. Physical Resources

#### 1. Location, Area and Connectivity

67. Sardarshahar is a small old city in the north part of Rajasthan, India, and a part of Churu district. It was established about 7 centuries ago and named after one of the historic local emperors, Sardar Singh. The Churu district is bounded by Sri Ganganagar district in the North, by Sikar and Jhunjhunu and Hissar district of Haryana in the East, by Nagaur in the South and in the West by Bikaner. Churu, like an oasis, situated in the middle of the shifting golden sand dunes, opens the gate to the great desert of Thar. The north border is neighbor of Hanumangarh District, east by Haryana state, Jhunjhunu and Sikar districts to the south east, Nagaur District to the south, and Bikaner District to the west. The total area of the district is 13,85,898 hectares. It is occupied nearly 4.92 percent of the area of the state and stands eight in respect of area amongst the district of Rajasthan. The district covers 6 Tehsils Churu, Ratangarh, Taranagar, Rajgarh, Sardarshahar, and Sujangarh.

68. Sardarshahar is situated 285 kilometers from state capital Jaipur and 56 kilometers from district headquarters Churu. It has its own RSRTC bus depot which is operational here since 1976. It is also connected to Ratangarh through a railway line. The railway line ends here and the train returns to the Ratangarh Junction. The transport inside the city is mainly of Auto-Rickshaw. The city is also well connected with other important cities of the state, Bikaner & Sri Ganganagar using a mega highway and state highway network. It is around 130 kilometers from Bikaner. Location map of Sardarshahar is shown in **Figure 16**.

**Figure 16: Location of Sardarshahar in Churu district of Rajasthan**

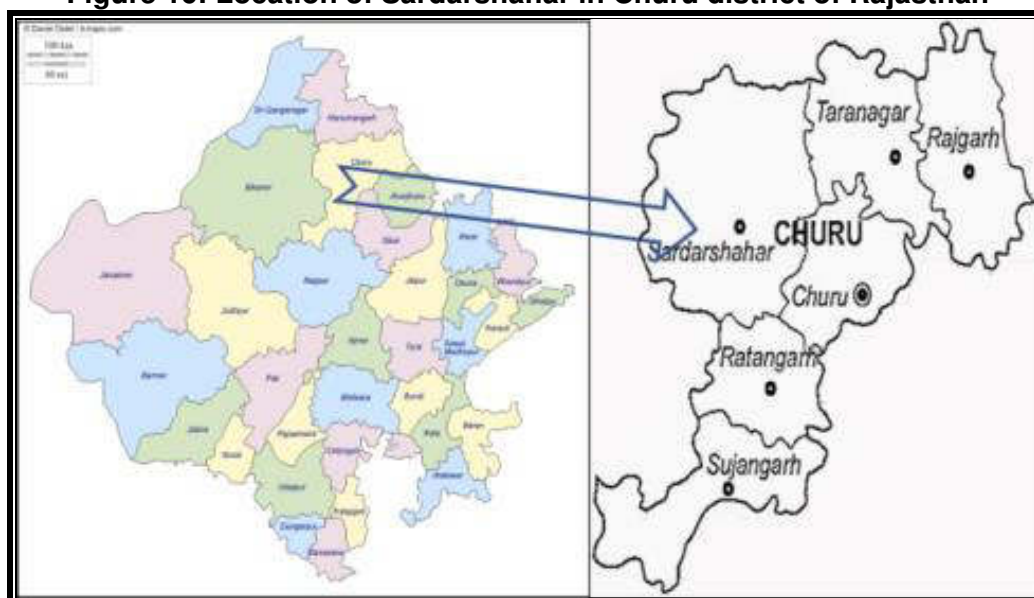

## 2. Topography, Soils and Geology

69. **Topography:** District Churu is a part of the great Thar Desert. It is covered with a thick mantle of sand, is characterized by 6 to 30 meter longitudinal dunes trending north east to south west. The ground level in the district is about 400 meters above mean sea level the terrain in general is sloping from south to north. There are no big hill in the district except some hillocks. There are no perennial rivers or streams in the district. Wells and ponds are the principal sources of water supply. The climate of the district is dry desert with large variation in temperature. The minimum and maximum temperature recorded in the district varies from  $-2^{\circ}\text{C}$  to  $50^{\circ}\text{C}$ . Relative humidity is generally below 30% except during the brief south east monsoon period when the same rises up to 60% in the district the rainy season usually lasts from July to mid-September and the normal usual rainfall is only 328 mm.

70. **Soils:** The project area is generally covered sand to loamy sand, Aeolian in nature, belonging to mainly Entisols and Aridisols. Major soil types in District Churu are - Deep Yellowish brown Sandy, Deep Light yellowish brown Loamy, Deep Pale brown Sandy, Medium Light yellowish brown Loamy, Medium Light yellowish brown Sandy, Deep Pale brown Loamy. The soil in Sardarshahar is sandy underlain by hard clay and brick red sand stone.

71. **Geology:** The geology of the Churu district is largely concealed by windblown sand and has been worked out on the basis of scanty exposures, from dug well and borehole data. The area, a part of the Thar Desert is basically a fluvio-aeolian depositional basin containing 255 m thick pile of Quaternary sediments. It is characterized by an undulating topography consisting of sand dunes interspersed with interdunal valley and linear depressions. The various rock types of the area belong to the Delhi Supergroup, Erinpura Granite, Malani Igneous Suite, the Marwar Supergroup and the tertiary sediments including the Palana Formation of Palaeocene age. The oldest rock sequence in the area belongs to the Punagarh Group comprising of slate, phyllites, quartz-mica schist, ferruginous quartzite etc. of the Delhi Super Group. These rocks are well exposed in south of Bidasar and east of Pandurai Geologically, the area belongs to rocks of Delhi super group.

72. The site on which the town stands is of great significance in its natural setting. The old town was established on the eastern side of a hillock, which provided natural protection against the westerly sandstorms. It has a gradual slope towards south and the old town was in a river valley namely 'khagal'. This location advantage made this town to grow and prosper throughout its history. There is no developed storm drainage and sewerage within the city. Geological set up of the town is mostly brick red sandstone belonging to Barmer Group of sand stones. Some older alluvium consisting of sand with gravel and Kankar, coarse to medium sandstone, silt and clay belonging to different geological ages are also encountered.

73. **Mineral Resources:** A major part of the area of the district, being thickly covered with sand, remains hidden from geological observations. But at some places rock exposures have been found both in eastern and western portions. The Delhi super Group of rock is represented by Ajabgarh group covering phyllites. Slate and quartzite. The malani igneous suite is mainly represented by an effusive phase which comprises phyllites and volcanic tuffs. The Marwar super group is represented by rocks of Jodhpur, Bilara and Nagaur group which include sandstone, shale, limestone, dolomite, anhydrite, gypsum and halite.


74. Churu is not rich in minerals but they are found at few places. The various mineral deposits are copper salt petrel, sandstone, limestone, gypsum etc. But these deposits are very small in size and not of much economic importance. Only masonry and marble stones are



available as stones in the district. Masonry stones are available in Randhisar Hill, Lodasar, Biramsar and Gopalpura where stone grit units are establishing. Marble stones are extracted in village Dunkar, tehsil Sujangarh that are colored linear but not superior to other marbles.

75. **Seismology.** As per the seismic zoning map of India, Churu district is in the Zone II of Seismic Zoning Map of India (BIS 2001, New Delhi), which is a low activity zone (Figure 17). As per the hazard map of Rajasthan the Churu is in the Zone-II (MSK VI) which is a low damage zone. The area is less prone to earthquakes as it is located on relatively stable geological plains. This region is liable to MSK VI or less and is classified as the Low Damage Risk Zone. The earthquakes in this region had magnitudes of m 5.0 or more in the past.

**Figure 17: Earthquake Zoning Map of Rajasthan**

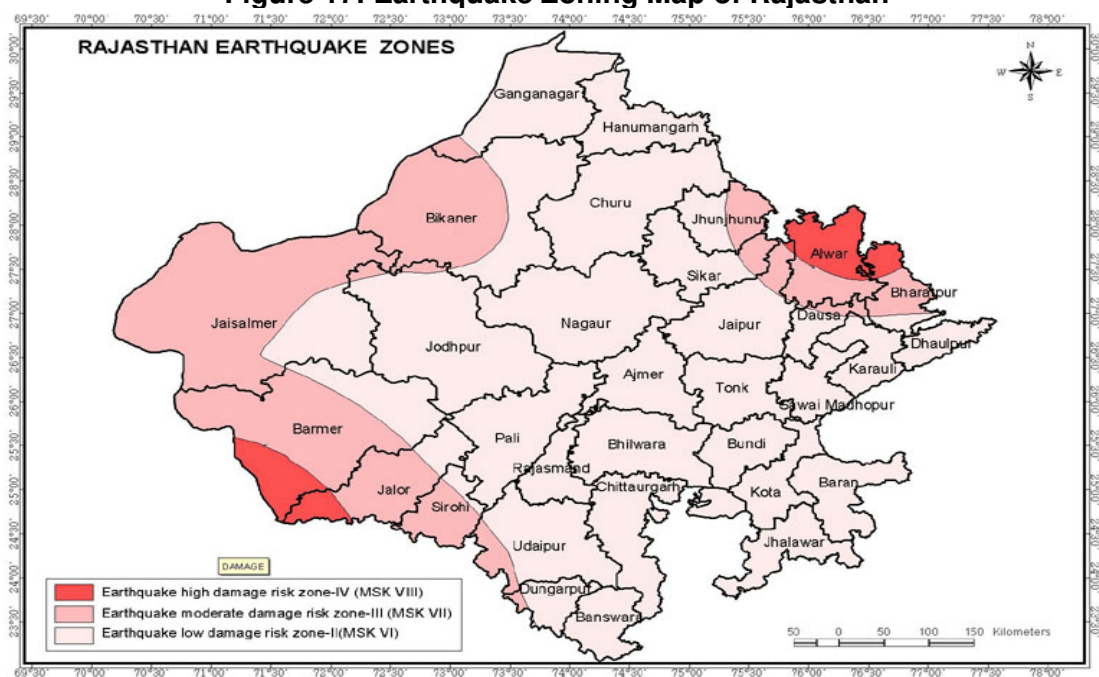

### 3. Climatic and Rainfall

76. **Temperature:** The region boasts record temperatures ranging from below freezing point in the winters to over 50 degrees in the summer afternoons. The period from March to May is one of continuous increase in temperatures. May is generally the hottest month with a mean daily maximum temperature of about 41.7°C and mean daily minimum of about 25.1°C. The weather is intensely hot in summer and on some days the day temperature may reach up to 46°C. From November, both day and night temperatures begin to decrease rapidly. January is generally the coldest month with the mean daily maximum temperature at about 22.9°C and mean daily minimum at about 4.6°C. Minimum temperature sometimes drops down to subzero temperatures.

77. **Rainfall:** The annual rainfall in this desert area varies from 200 mm in the west to around 400 mm in the east, with high annual coefficient of variation. Most of the rainfall over this area is contributed by a few high intensity rainfall events. The meteorological records for 100 years at the Sardarshahar Station indicate a nominal declining trend in the total amount of rainfall. The critical analysis of rainy days in monsoon years points out that the number of rainy days with total daily rainfall between 20 and 50 mm and above constitutes nearly 4 to 5 events,

indicating maximum contribution in the annual amount of rainfall by these events.

78. Average yearly rainfall in the region is 408.3 mm. About 90 percent of the annual rainfall in the region is received during the southwest monsoon months i.e. June to September. July is the rainiest month on an average 153.4 mm rainfall occurs in the month of July. July is having maximum number of rainy days i.e. 7.1. Sardarshahar is having average rainfall of 296 mm.

79. **Relative Humidity:** Most humid conditions are found in the monsoons, followed by post-monsoons, winter and summer in that order.

80. Global climate models (PRECIS) suggest a strong increase in temperature for state of Rajasthan. Baseline data of temperature from 1975 to 2005 has been considered. Projections of maximum temperature predicted that temperature varies from 0.6°C in 2020s to 3.2°C in 2080s. Projection trends of minimum temperature increases clearly stated that minimum temperature of atmosphere in the state is slightly increases from 0.9°C in 2020s to 3.9°C in 2080s. The projections of maximum temperature increase for the project design period i.e., by 2050s is 2.1°C and projections of minimum temperature increase for the project design period i.e., by 2050s is 2.6°C.

81. In context of precipitation, available rainfall projection from global climate models (PRECIS) suggest an increase in average rainfall for state of Rajasthan depicts that based on the baseline data of precipitation from 1975 to 2005, projection of average annual rainfall varied from 6.6% in 2020s to 9.1% in 2080s. The projections of annual rainfall change for the entire state for the project design period i.e., by 2050s is 3.9 %. The models also suggest an increase in the duration of dry spells as well as a tendency towards more intense rainfall events. Any likely increase in precipitation would occur in the northern part of the state and any decrease in the southern part of the state. Climate of Rajasthan is varied in nature. Temperature and rainfall are the main climatic factors that determine eco-climate of the area. Diurnal variations in temperature could be seen in the state of Rajasthan. Temperature reaches above 50°C in summer and 0° in winter in some of district in the state. Pattern of rainfall is uneven and erratic in nature.

82. By the designed sewerage project, all the treated water will be used in beneficial purposes such as agricultural activities etc. that is the major component of the economic sector which is largely dependent on rainfall for agricultural activities. Adequate treated water from treatment plant will ensure the sustainability of more crops per drops in the area/regions and to make less dependent on precious groundwater resources in the area/region.

#### **4. Surface Water**

83. There is no river in Sardarshahar town. There are some small ponds and reservoirs in Sardarshahar, which are mostly filled after monsoon and used for irrigation by nearby agricultural fields. No any river flows through Sardarshahar town.

#### **5. Groundwater**

84. Water bearing formations in Churu district range from unconsolidated alluvium to semi consolidated sandstones and consolidated schistose rocks. The older and younger alluvium constituted of primarily sand of windblown and fluvial origin forms aquifers covering 71% of the district area. Next most prominent aquifers in the district are sandstones (17.5%) followed by schist (6.8%) and limestone (4.7%) aquifers. The hardrock aquifers are prominent in southern

and partly in western part of the district. Apart from Taranagar block which is completely saline, the rest of the five blocks fall into different categories of stage of ground water development. While Sardarshahar is within 'Safe' category the Sujangarh and Rajgarh blocks are in 'Over Exploited' category warranting need for conservation measures. The shallow groundwater bearing aquifer formations in the desert area are mainly composed of aeolian sands of unconsolidated nature. Aeolian sediments are remarkably uniform in grain size distribution, textural characteristics and mineral composition over contiguous areas and generally lack stratification. Due to greater degree of sorting, the porosity and permeability of these deposits are respectively greater than the corresponding quantities for aqueous deposits of similar particle size. Fluoride in groundwater of this region is high mainly due to dissolution from fluoride-bearing minerals like hornblende and illite. X-ray diffraction study of the soil samples from this region states that apart from the causative minerals mentioned above, presence of calcite and dolomite may also have accelerated the leaching of fluoride to the groundwater. The arid climate with high evaporation and insignificant natural recharge might have accelerated the strengthening of fluoride concentration in the groundwater of this area.

85. Depth of Groundwater table in Sardarshahar is Min. 10 and maximum 87m in pre-monsoon and minimum 2m and maximum 20m in post-monsoon.

86. Ground Water Quality monitoring is being conducted by PHED in existing tube wells situated in Sardarshahar town used for water supply in town. Results of 2 samples of this test report are discussed in below **Table 8**.

**Table 8: Results of Ground Water Quality Analysis**

| Parameters                               | Max. Permissible limit (mg/l) | Results in mg/l (TW-1 at city) | Results in mg/l (TW-2 at city) |
|------------------------------------------|-------------------------------|--------------------------------|--------------------------------|
| pH                                       |                               | 7.5                            | 7.8                            |
| Turbidity                                |                               | Clear                          | Clear                          |
| Odour                                    |                               | Nil                            | Nil                            |
| Total alkalinity (as CaCO <sub>3</sub> ) |                               | 70                             | 83                             |
| Total Hardness (as CaCO <sub>3</sub> )   |                               | 100                            | 120                            |
| Calcium Hardness (as CaCO <sub>3</sub> ) |                               | 60                             | 60                             |
| Chloride (as Cl)                         |                               | 300                            | 300                            |
| Sulphate (as SO <sub>4</sub> )           |                               | Nil                            | NI                             |
| Nitrate (as NO <sub>3</sub> )            |                               | Nil                            | Nil                            |
| TDS                                      |                               | 1040                           | 1520                           |
| Fluoride                                 | 1.0                           | 3.7                            | 9.2                            |

Source: PHED, dtd. 27.07.2017

## 6. Air and Noise Quality

87. In Sardarshahar town there are no industries and therefore level of air pollution is not high. Source of air pollution in the town is only agricultural activities and means of transport.

88. Air and noise quality monitoring has been conducted in the pre-construction phase (SIP period) by the contractor and reports are included in Appendix 40. After analysis of monitoring results, for PM<sub>10</sub>, PM<sub>2.5</sub>, SO<sub>2</sub>, and NO<sub>2</sub>. The Monitoring results shows PM<sub>10</sub> is above the CPCB's and IFC prescribed standards limits for all places and for PM<sub>2.5</sub> at STP (1.60MLD) near Ashok Circle is above for IFC acceptable limits.

89. **Noise Quality** : It is noted from the results that noise levels at town are mostly within the acceptable limits for residential areas for day time prescribed by CPCB and IFC except for STP (1.6MLD), near Ashok Circle, which is on higher side by 0.79 dBA from SPCB's standard.

## **B. Ecological Resources**

90. There are no forest areas or ecologically sensitive areas within or near the municipal boundary of Sardarshahar town. Project area mostly comprises urban and habitation areas, and agricultural, vacant and barren lands. Nearest protected area is **Tal Chhapar** Wildlife Sanctuary, the boundary of which is 60 km south from Sardarshahar. Churu district is a part of the Indian Great Thar desert. The district has only 6663 hectare area under the forest which is only 0.46% of the total area of the district. The vegetation cover in the district is almost negligible due to extremes of temperature during winter and summer and scanty rainfall established sand dunes inside Grass Reserves of inside areas, free from biotic interference, contain very poor and open forest. Profile of sanctuary is given below, however, as stated, given that is far away (60 km) from project area, project activities do not interfere with sanctuary. Screening of project areas is carried out based on Integrated Biodiversity Assessment Tool (IBAT) and IBAT proximity area report shows that there is no protected or key biodiversity area within 10 km of Sardarshahar (Appendix 10)

91. **Tal Chhapar Sanctuary** is a sanctuary in Churu district, located about 60 km aerial distance from Sardarshahar. Previously Tal Chappar sanctuary was a Private Hunting Reserve of the Maharaja of Bikaner. This sanctuary is 210 km from Jaipur on the peripheral of the Great Indian Desert and situated on road from Ratangarh to Sujangarh. Tal Chhapar sanctuary lies in the Sujangarh tehsil of Churu district. This sanctuary is a flat saline depression locally known as "Tal" that has a unique ecosystem in the heart of the Thar Desert. Tal Chappar Sanctuary has open grassland with spread all over Acacia and prosopis trees which give it a look of a typical Savanna.

92. Tal Chhapar Sanctuary is famous for black bucks. Talchhapar wildlife sanctuary is the sole place having a good population of Black buck in such a small area. The sanctuary is a home to nearly 1680 Black Bucks. Being a natural home of Blackbucks. The sanctuary area is mostly covered by grasses with a very few trees. It lies on the way of the passage of many migratory birds such as harriers. These birds pass through this area during September. Birds commonly seen in the sanctuary are harriers, Eastern Imperial Eagle, Tawny Eagle, Short-toed Eagle, sparrow, and Little Green Bee-eaters, Black Ibis and Demoiselle Cranes, which stay there till March. There are many other birds like skylark, crested lark, Ring Dove, brown dove and blue jay are seen throughout the year. Desert fox and desert cat can also be spotted along with typical avifauna such as partridge and sand grouse.

93. Tal Chappar wild life sanctuary comes alive with the chirping of various migratory birds including montagur's, marsh harrier, pale harrier, imperial eagle, tawny eagle, short toed eagle, sparrow hawk, skylark, crested lark, ring dove, brown dove, blue jay, green bee- eaters, black ibis and Demoiselle cranes.

94. **Flora and Fauna in the study area.** Information on the floristic and faunal diversity of the study area is gathered from the local habitants. Secondary data on flora and fauna, cropping patterns etc. were also collected from available literatures, internet, forest department and revenue department. The species of Herbs, Shrubs, Climbers, Trees and Major agriculture crops, were documented. The dominant plant species growing in this area are:

95. **Common Flora in Sardarshahar:** Common trees found in Sardarshahar are-Neem (*Azadirachta indica*), Dhak (*Butea monosperma*), Gulmohar (*Delonix regia*), Imli (*Tamarindus indica*), Pipal (*Ficus religiosa*), Ker (*Capparis decidua* Forsk.), Bargad (*Ficus bengalensis* Linn.), Babool (*Acacia nilotica*), Avla (*Embllica officianalis* Gaerth.), Siris (*Albizia lebbbeck*), Vilayati babool (*Prosopis juliflora*) etc.

96. **Common Fauna of Sardarshahar:** Common animals found in Sardarshahar area are- Birds- Baya weaver (*Ploceus philippinus*), White-throated kingfisher (*Halcyon smyrnensis*), House swift (*Apus affinis sub sp. affinis*), Rock Pigeon (*Columba livia*), Indian peafowl (*Pavo cristatus*), Jungle crow (*Corvus macrorhynchos*), Mammals- Five stripped palm squirrel (*Funambulus pennantii*), Common House Rat (*Rattus rattus*), Hare (*Lepus nigricollis*), Garden lizard (*Calotes versicolor*). It is also observed that the faunal species found in the study area are commonly found species. No rare, endemic & endangered species are reported in the core / buffer zone of project areas.

97. **Migratory Avifauna.** The subproject area is part of the massive avian migratory channel called the Central Asian Flyway (CAF), which spans the entire Indian subcontinent. Thus, the subproject area lies in the path of various winter migratory birds entering the Indian subcontinent from the north and headed farther south. With its diversity of habitats, the area in general is likely to be providing seasonal habitats or staging points to many of these visitors. But migratory birds are not reported in the water bodies in and around Sardarshahar. Local people, public representatives and forest officials were consulted during the site visit confirmed that there are no migratory birds that visit dams. There is no notable wildlife presence / movement indicated during the consultations with locals and forest officials.

98. On the review of available information, no rare or endangered species of flora and fauna prescribed by IUCN or WPA, 1972 are found along the project areas.

### C. Economic Development

99. **Land use.** The geographical area under the Sardarshahar municipal council was 4050 ha, out of which developed area is 2935 ha.

**Table 9: Existing Land Use of Sardarshahar**

| Sl. No. | Land Use                           | Area (in Acres) | Area (in Ha.) | Percentage of Urban area (%) |
|---------|------------------------------------|-----------------|---------------|------------------------------|
| 1       | Residential                        | 1775            | 60.0          | 44.0                         |
| 2       | Commercial                         | 163             | 6.0           | 4.0                          |
| 3       | Industrial                         | 196             | 7.0           | 5.0                          |
| 4       | Govt. / Central Govt.              | 32              | 1.0           | 1.0                          |
| 5       | Recreation                         | 268             | 9.0           | 7.0                          |
| 6       | Public and Semi Public             | 140             | 5.0           | 3.0                          |
| 7       | Transport, roads and Recirculation | 361             | 12.0          | 9.0                          |
|         | <b>Developed Area</b>              | <b>2935</b>     | <b>100.00</b> | <b>73.0</b>                  |
| 8       | Reservations                       | 175             |               | 4.0                          |
| 9       | Gandhi VidyaMandir Area            | 940             |               | 23.0                         |
| 10      | Urbanised area                     | <b>4050</b>     |               | <b>100.00</b>                |

**Source:** Master Plan Master plan Sardarshahar 1986-2016



100. **Industries:** Churu district offers all the important infrastructure facilities essential for economic and industrial growth like water, power, transport, industrial training, industrial area etc. Total numbers of registered units in district are 1800 out of which Forest Based 489, Miscellaneous & Service 337 (Hotel & Restaurants, laundry, tent house, Auto mobile workshop, Mobile repairing and maintenance, offset printing, printing press, transportation), Cotton & Textile 251, Engineering & Metal 233, Non-Metallic Minerals Products 165, Agro & Food Processing 115. Micro & Small Enterprises products which have export potential and also being presently exported from the district are handicrafts items like wooden decorative pieces & article, leather jutis, sandal, guar gum, wood items etc.

101. There is only one industrial area in Sardarshahar having 277 registered units. There is no large and medium industry in Sardarshahar, only small-scale industries such as gum factory, pulses and oil mills exist. Iron goods and iron craft is also an important small-scale industry in Sardarshahar. Small industrial units of mines and mineral based industries also present in this town. (Source: Brief Industrial Profile of Churu District, MSME, Govt. of India and public consultations)

102. **Agriculture:** The climatic conditions (arid desert) of a region affect the agricultural cropping pattern of different areas. Thus, it produces different crops. Amongst a host of climatic factors i.e. rainfall, temperature, humidity, wind velocity and duration of sunshine etc. affect the cropping pattern in a significant way. Annual rainfall and its distribution over the entire year and the regimes of diurnal and annual temperatures are by far, the prominent factors affecting agriculture and the lifestyle of the people in the region. Agricultural land is very less in Sardarshahar as most of the vacant land is not suitable for agriculture. There is no means of surface water irrigation system such as canal and therefore agriculture is mainly based on ground water and rainwater. Two crops are grown in Churu namely (i) Rabi in which crops like Gram, Mustard, Moong, Garlic, Barley are grown during months of September-April. (ii) Kharif in which crops like Maize, Jowar, Moong, Soya bean, Chilly, Ground Nut, Cottonseed, Rapeseed etc. are grown during months of April-October.

103. Millet, Kidney-bean, Moth, gram, mustard, Tara Mira and Ground Nuts are other crops abundantly in this area. The agriculture is based on the monsoon out rightly, In some tehsils, irrigation is made by extracting water from wells but it is not success satisfactorily due to salty and deep water.

#### **D. Infrastructure**

104. **Water Supply.** At present Sardarshahar meets its Water supply from Sawarsat Canal, Water Treatment Plant of capacity 70 MLD located at Dhannasar which is used to supply Clear Water to Sardarshahar Town along with 3 other Towns and nearly 500 Villages. In between supply to Sardarshahar Town there are Two (2) Intermediate Pumping Station located at Palloo and Sadasar with CWR of capacity 4100 KL each. At present Total incoming water to Sardarshahar town from WTP is 12MLD, the remaining requirement is met up from Bore-Wells located inside Sardarshahar Town. There is an Existing Reservoir of 4100KL capacity inside Sardarshahar Town which is used to supply water to Sardarshahar Town as well as Sardarshahar Industrial Areas, and also to Ratangarh CWR. Inside Sardarshahar Town, there are four OHSR from where water is being supplied to from the Sardarshahar CWR. Four OHSR of capacity from 500KL to 1500KL is used to distribute Water to the entire Municipal area of the Town.

105. **Sewerage.** At present the Town does not have existing Underground Sewerage system. Though sewer is laid under UIDSSMT project currently in Sardarsahar, yet it has not been functional till now. Presently 4 sewerage pumping stations and 2 STP's based on WSP (Waste Stabilisation Ponds) technology are being constructed which when connected to the sewer system will cater to the demand up to the intermediate year 2025 as per the designed Detailed report prepared under UIDSSMT. In absence of functional sewage system in town most of houses and establishments depend on septic tanks and soak pits. Open defecation is also not uncommon especially in outskirts of town.

106. **Solid Waste Management:** Sardarshahar Nagar Palika collects solid waste via door-to-door collection systems through an NGO under supervision of Nagar Palikastaff from all municipal wards. Waste from door to door collection, community dust bins/open collection points is manually lifted into vehicles for transportation to the disposal site. Currently there is no solid waste processing facility and solid waste is dumped without any segregation in the vacant government lands and low lying area for surface leveling. The un-segregated waste collected from the city is disposed-off by crude open dumping method at the site. There is no landfill facility in the city.

107. **Storm Water Drainage:** The municipal Drains are mostly open causing problem in Rainy season. Presently Sewerage from the City flows into several small Drains. Presently the drainage system is based on eleven ginanis/sump-wells. Each ginani has its own contributory area where house drainage and storm water is collected through combined Drains. The disposal from ginani located in the North of the Town numbered as 1 to 4 in the town map is done by pumping the wastewater towards outer low-lying area of Northern side. Likewise, remaining ginani are interconnected to ginani no.10 from where wastewater is finally pumped to low lying area in South west of the town. Normally pumping is done almost 4 to 6 hrs a day from each ginani. For this, separate stand by pumps and D.G sets are provided.

108. **Power Supply.** Thermal power is the main source of energy from conventional sources in Rajasthan, contributing early 90% of the electricity, compared to hydropower, which produces the remainder. State-level companies (Rajya Vidyut Utpadan Nigam Ltd, RVUN; and Rajya Vidyut Prasaran Nigam Ltd, RVPN) are responsible for power generation and transmission respectively, and distribution is provided by three regional companies, the Ajmer Vidyut Vitaran Nigam Limited (AVVNL), Jaipur Vidyut Vitaran Nigam Limited (JVVNL) and Jodhpur Vidyut Vitaran Nigam Limited (JDVVNL). Presently, total power availability / installed capacity of RVUN in the State is 17281 MW as on Dec. 2016, including 5957.35 MW installed capacity of RVUN power stations as on 31.12.2016. In addition, RVUN is also managing and operating two Inter State Hydel Power Stations with installed capacity of 271 MW. Over 26% of total power generation (conventional and non-conventional) comes from non-conventional sources like wind, solar and bio-mass power is supplied from the central grid by overhead cables carried on metal and concrete poles, mainly located in public areas alongside roads. The power supply in the state is continuous and reliable, except in warmer months with periodic outages in warmer months, and large fluctuations in voltage. In Sardarshahar town power supply is reliable and enough power is supplied to the town by the authorities.

109. **Transport:** Sardarshahar is a comparatively new town, still its development is not very much planned, and especially the roads are narrow and kutcha. The main traffic of the town moves along the road from Bus Stand to Railway Station which is quite narrow. The existing Bus Stand is located in congested area. The major transportation mode is autorickshaw. The Only Rail Link is with Ratangarh and it was provided in 1916 in erstwhile Bikaner State. By Road it is well connected to Churu District Headquarter, located at a distance of 52 Km from

Sardarshahar and also to Jaipur at a distance of 250 km. nearest Railway Station is Churu, nearest Airport is Jaipur.

110. The old city area is characterized by very narrow roads that are frequently congested with traffic and pedestrians. In contrast the remainder of the town has a relatively good road system, particularly in the outer areas, where streets are wide and not heavily used by traffic. Roads in the town are consisting of bitumen/tar roads, cement concrete roads and gravel roads. Most of the roads are maintained by Nagar Palika, Sardarshahar, while major intercity roads and highways are maintained by the Public Works Department (PWD). Road condition is generally good, but some roads are in need of repairs and resurfacing. This plus the absence of parking spaces and pedestrian walkways leads to slow traffic and congestion in old town specially walled city areas. Transport in the city is mainly by personal vehicles (cars and motorcycles) and motor-rickshaws. The Rajasthan State Road Transport Corporation (RSRTC) runs public buses to neighboring villages and towns such as Ajmer, Kota, Udaipur and Jaipur.

## **E. Physical Cultural Resources**

### **1.Demography**

111. Sardarshahar is a Municipality city situated in Sardarshahar tehsil of Churu district. The Sardarshahar city is divided into 40 wards for which elections are held every 5 years. As per the Population Census 2011, there are total 15,433 families residing in the Sardarshahar city. The total population of Sardarshahar is 95,911 out of which 49,669 are males and 46,242 are females thus the Average Sex Ratio of Sardarshahar is 931.

112. The population of Children of age 0-6 years in Sardarshahar city is 14042 which is 15% of the total population. There are 7398 male children and 6644 female children between the age 0-6 years. Thus, as per the Census 2011 the Child Sex Ratio of Sardarshahar is 898 which is less than Average Sex Ratio (931).

113. As per the Census 2011, the literacy rate of Sardarshahar is 74.1%. Thus Sardarshahar has higher literacy rate compared to 66.8% of Churu district. The male literacy rate is 83.98% and the female literacy rate is 63.54% in Sardarshahar.

114. Largest proportion of population comprises Hindus followed by Muslims and Jains. Main languages spoken are Rajasthani, and Hindi.

115. In Sardarshahar Municipality out of total population, 27,695 were engaged in work activities. 88.6% of workers describe their work as Main Work (Employment or Earning more than 6 Months) while 11.4% were involved in Marginal activity providing livelihood for less than 6 months. Of 27,695 workers engaged in Main Work, 1,033 were cultivators (owner or co-owner) while 612 were Agricultural labourer. (Source: Census of India 2011)

### **2.History, Culture and Tourism**

116. **History.** Churu district was founded in 1620 AD by the Nirban clan of Rajputs. Churu was a part of Bikaner district before the Independence of India. In 1948, it was separated from Bikaner when it was reconstituted.

117. The town was named after Mahara jSardar Singh (1851 to 1872) who built a fort even before his accession, in 1839. He also built four bazaars known as Utradha, Aguna, Dakhinade and Athuna along with the Fort. The digging and construction of wells in various part of this desert town as sources of drinking water, has played an important role in the growth of the town. Wells names after Kalu Khan, Meena and Siyani were constructed in the year 1843 in the northern part of the town, for the use of the roaming tribes. Subsequently people settled around these wells. Other important wells were also constructed from time to time. Jama Masjid was constructed in the year 1863 in the north of the Utradha Bazar. The Railway line which came in 1916 in Sardarshahar and Ramnagar made important additions in the development of the town. Subsequent developments were the old ginani in the west and Arjun club in the east of the town. In the year 1930, when Ganga Golden Jubilees was celebrated, the area under Talai was donated to MahantPrasram, with the condition that it would be kept as an open space. Rapid development took place after Independence when Gandhi VidyaMandir was established in 1950 on the eastern fringe of the town. Electricity came in 1960. Bikaner bye-pass was constructed in the year 1965 and some industrial units were established between 1971-1981. Large areas under residential use were also added during this period.

118. Salasar Balaji Temple - Located in the town of Salasar near Sujangarh, Salasar Balaji is the temple of Lord Hanuman. Fairs are organized every year on Chaitra Poornima and Ashwin Poornima at SalasarBalaji temple. The place also houses Rani Sati temple and KhatuShyamji temple as well. SalasarBalaji is also known by the name of SalasarDham. SalasarBalaji is about 80km from Sardarshahar.

119. Tal Chhappar Sanctuary- Tal Chhappar sanctuary is located in the Shekhawati region of the state of Rajasthan. The sanctuary is known for its rare blackbuck. The Tal Chhappar sanctuary is located at the edge of the Thar Desert on the Ratangarh-Sujangarh highway. Geographically, the sanctuary falls in Sujangarh Tehsil of Churu and is an amusement place for the visitors. The sanctuary is at a distance of 85 km from Churu city and at 75 km from Sardarshahar.

## **F. Environmental Settings of Investment Program Component Sites**

120. Subproject components are located in Sardarshahar town and in its immediate surroundings which were converted into urban use for many years ago, and there is no natural habitat left at the designed sites. No involuntary land acquisition of private land is anticipated for this project. The project sites are located in existing road right of way (RoW) and government-owned lands. There are no protected areas, wetlands, mangroves, or estuaries in or near the project locations.

121. Sewers and water supply pipes will be laid along the roads/streets in the town within the road right of way (ROW). In wider roads pipes/sewers will be laid in the road shoulder beside the tarmac, and in narrow roads, where there is no space, sewers will be laid in the road carriage way by break opening the tarmac. Roads in some part of the town are narrow. Roads are lined both sides with open drains. In narrow roads sewers will be laid in the middle of the road, which may affect the traffic. Bigger diameter trunk sewers will be laid along the main roads, which are wide and have adequate space. No tree cutting is anticipated as there is adequate space to lay the water & sewer pipeline in those roads.

122. Designed site of STP-1 (2.30 MLD) is near to existing STP at South Campus in vacant Government land, which will be made available by municipal council for construction of

designed STP. There is existing 5 MLD STP constructed under UIDSSMT but is not operational yet. There are few trees of Ber, Babool and Khejri, which may be required to cut for construction of designed STP. There are no habitations near the designed site. No wildlife is reported in this area.

123. Designed site of STP-2 (3.40MLD) is proposed near existing STP at North Campus is vacant government land under Municipal Council. There is existing 2 MLD STP constructed under UIDSSMT, which is not operational yet. There are no habitations near the designed site. No wildlife is reported in this area.

124. Designed site of STP 3 (1.60 MLD) is designed near Ashoke circle. The land belongs to Gandhi Vidyamandir Sewa Samiti Trust Presently solid waste collected from city is being dumped here. Some new settlements are established about 500 m distance near the site. Some small shrubs and bushes are present at site. Site is having undulating area and vacant. Approach road is available on two sides of the site. Gandhi Vidyamandir Sewa Samiti Trust has given NOC for proposed works. Further negotiations for MOU between Trust and Nagar Palika is under process and as soon as MOU is done, it shall be informed to ADB.

125. Designed site of SPS 1 (2.30 MLD) is located in on land of Gaushala committee and shall be made available by municipal council for construction of designed SPS. There is BSNL office near the designed site. Kabristan is also present on the other side of the road. Few scattered habitations also exist within 500 meters from this site. Some trees of babool are present at site. Solid waste is being dumped here to level the land.

126. Designed site of SPS 2 (0.65 MLD) is located in Zone 2 near Shyam dev Hotel on IGNP land and shall be made available by municipal council for construction of designed SPS. There are vacant lands and some agricultural fields near this land. Few scattered habitations also exist within 100 meters from this site.

127. The CWR of (2400 KI capacity), CCC, CRMC-1 and pump house will be constructed within the existing campus of PHED at Hanumangarh Road, where enough vacant space is available. Few trees and small shrubs are present at the designated site. Site is not being used for any other purpose and demarcated by distinct boundary wall. There is PHED Exn office, existing CWR, pump house and other miscellaneous building within the campus. No habitation exist in or nearby the site.

128. Proposed site for the construction of CRMC-2 is within the existing campus of Fire Station, which is under the jurisdiction of Nagar Palika and Nagar Palika has given the NOC for the proposed works. There are storage of some new dustbins, metal and other scraps at site which are proposed to be shifted to other site by Municipal Council before start of construction works. There is one Pipal Tree present at site. Site is having approach road and demarcated by boundary wall and gate.



**Table 10: Site Environmental Features**

| Sr. No | Subproject component                                                                                                      | Environmental Features of the Site                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Photographs                                                                                                                                                                                                                                                                                                                                                                                         |
|--------|---------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1      | <p>Construction of CWR-2400 KL and</p> <p>Pump House- 35x10 m</p> <p>Lat - 28°26'46.54"N,</p> <p>Long - 74°30'41.93"E</p> | <p>The CWR and pump house will be constructed within the existing campus of PHED at Hanumangarh Road, where enough space is available.</p> <p>A flat vacant land (not under any productive use) is available within PHED campus. The PHED campus is well defined with a boundary wall. Previously location for proposed works (CWR, pump house, CRMC-1 and CCC) were given on the North-West corner of the campus beside the existing CWR. Now the site has been changed and new site is situated on the South-West direction in the campus, behind the existing PHED Exn. Office building and approximately 500 mtrs away from previous site.</p> <p>There are no habitations near the proposed site. There is also existing CWR, pump house and PHED Office working in this campus therefore all the precautions should be taken to reduce/avoid any adverse impact to the people and staff visiting this office during time of construction works. There are few trees of Babool and Khejri and some shrubs present at site. All efforts should be made to save these trees and if any of these is required to be cut in unavoidable circumstances, prior tree cutting permission from concerned authority to be taken and compensatory plantation in the ratio of 1:3 should be done as per RUIDP policy. Site demarcation is not done till now.</p> |  <p>New location of proposed site for CWR, pump house, CRMC-1 and CCC</p>  <p>Google Map showing previous and new proposed locations for the construction of CWR, pump House, CRMC-1 and CCC within the same PHED campus</p> |

| Sr. No | Subproject component                                                                                   | Environmental Features of the Site                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Photographs                                                                                                     |
|--------|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| 2      | <p>STP Site 1</p> <p>(5 MLD existing +2.4 MLD designed)</p> <p>28° 24'35.13"N</p> <p>74°28'58.18"E</p> | <p>Designed site of STP-1 (2.30 MLD) is near to existing STP at South Campus in vacant Government land, which will be made available by municipal council for construction of designed new STP. There is existing 5 MLD WSP based STP constructed under UIDSSMT, but is non-functional yet. There are few trees of Ber, Babool and Khejri, which may be required to cut for new constructions.</p> <ul style="list-style-type: none"> <li>• Designed development will be beside the existing 5MLD STP</li> <li>• The STP campus is well defined with boundary wall and gate</li> <li>• There are no sensitive receptors or habitation in nearby vicinity</li> <li>• Discharge of STP will be used by Gaushala for agricultural</li> <li>• No wildlife is reported in this area.</li> <li>• The designed site is well connected with a black top road</li> </ul> |  <p>Existing facilities</p> |

| Sr. No | Subproject component                                                                                    | Environmental Features of the Site                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Photographs                                                                                                                                                                                                      |
|--------|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3      | <p>STP Site 2</p> <p>(2 MLD existing + 3.4 MLD designed)</p> <p>28° 26'56.91"N</p> <p>74°28'39.39"E</p> | <p>Designed site of STP-2 (3.40MLD) is near to existing STP at North Campus is vacant government land under Municipal Council. There is existing 2 MLD WSP based STP constructed under UIDSSMT but is non-functional yet. There are no trees may be required to cut for new constructions.</p> <ul style="list-style-type: none"> <li>• Designed development will be beside the existing 2 MLD STP</li> <li>• The STP campus is well defined with boundary wall and gate</li> <li>• There are no sensitive receptors or habitation in nearby vicinity</li> <li>• No wildlife is reported in this area.</li> <li>• Discharge point is a nearby pond</li> <li>• The designed site is well connected with a black top road</li> </ul> |   <p>Discharge point is a nearby pond</p> |

| Sr. No | Subproject component                                                    | Environmental Features of the Site                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Photographs                                                                                                                                                              |
|--------|-------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4      | <p>STP Site 3<br/>(1.60 MLD)</p> <p>28°26'38.22"N<br/>74°30'35.47"E</p> | <p>Designed site of STP 3 (1.60 MLD) is designed near Ashoke circle. The selected site is within vacant land of Gandhi Vidyamandir Trust. Some small shrubs and bushes are present at site no big trees. Site is having undulating to flat topography. Approach road is available on two sides of the site.</p> <ul style="list-style-type: none"> <li>• There are no sensitive receptors or habitation in nearby vicinity</li> <li>• No wildlife is reported in this area.</li> <li>• The treated effluents will be used by Gandhi Vidyha mandir trust for irrigation of its own plantation and gardens.</li> <li>• The designed site is well connected with a black top road</li> </ul> |   |

| Sr. No | Subproject component                                                                                                                                            | Environmental Features of the Site                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Photographs                                                                                                                             |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
|        |                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  <p data-bbox="1381 727 1562 756">Discharge area</p> |
| 5      | <p data-bbox="199 760 331 854">SPS Site 1<br/>(2.30 MLD)</p> <p data-bbox="199 914 369 943">28°26'31.41"N</p> <p data-bbox="199 976 369 1005">74°28'45.18"E</p> | <p data-bbox="537 760 1176 1000">Designed site of SPS 1(2.30 MLD) is located in on land of Gaushala committee and shall be made available by municipal council for construction of designed SPS. There is BSNL office near the designed site. Few scattered habitations also exist within 500 meters from this site. Some trees of babool are present at site.</p> <ul data-bbox="537 1065 1163 1224" style="list-style-type: none"> <li>• Currently site is used for illegal dumping of waste.</li> <li>• Site is beside a crematorium / cemetery</li> <li>• Topography of land is undulating</li> <li>• No tree on site</li> <li>• Site connected with existing road</li> </ul> |                                                     |

| Sr. No | Subproject component                                               | Environmental Features of the Site                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Photographs                                                                                                                                                                                                                                |
|--------|--------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6      | SPS Site 2<br>(0.65 MLD)<br><br>28°25'31.18"N<br><br>74°29'21.90"E | <p>Designed site of SPS 2 (0.65 MLD) is in Zone 2 near Shyamdev Hotel on within IGNP Campus (irrigation department) and shall be made available by municipal council for construction of designed SPS. Few scattered habitations also exist within 100 meters from this site.</p> <ul style="list-style-type: none"> <li>• No tree and only some shrubs on site</li> <li>• Topography of land is flat</li> <li>• Land is vacant and not in used by IGNP</li> <li>• Site connected with existing road</li> </ul>                                                                                                                                                                                                                                                      |                                                                                                                                                         |
| 7      | CRMC-2 site at Fire Station<br>28°26'19.77"N<br>74°28'52.15"E      | <p>Proposed site for CRMC-2 is within the campus of existing fire station. There are some new dustbins, metal and other scraps stored at site which are proposed to be shifted to other site by Municipal Council before start of construction works. There is one Pipal Tree present at site. All efforts should be made to save this tree and if it is required to be cut in unavoidable circumstances, prior tree cutting permission from concerned authority to be taken and compensatory plantation in the ratio of 1:3 should be done as per RUIDP policy. There is approach road, boundary wall and gate at this site. Fire tenders and other vehicles are parked at this site under the shed, two rooms are also constructed here for firemen residence.</p> |  <p>Proposed site for construction of CRMC-2 at Fire Station</p>  |



| Sr. No                                                                                | Subproject component                                                                  | Environmental Features of the Site                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Photographs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                     |                                                                                     |                                 |                                   |                                                                                       |                                                                                       |                                            |                                   |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------|-----------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------------------|-----------------------------------|
|                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <div>Fire Station campus with fire tender shed</div> <div></div> <div>Site is having boundary wall and gates</div>                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                     |                                                                                     |                                 |                                   |                                                                                       |                                                                                       |                                            |                                   |
| 8                                                                                     | Transmission and distribution network                                                 | <p>The transmission system and distribution networks will traverse through different roads within the existing ROW. Therefore, no impacts shall be envisaged on structures (temporary or permanent) and CPRs. No sensitive areas in or near the alignment in the stretches where Transmission main/feeder main and distribution network lines are designed. Advance permissions from concerned authorities will be required for road cutting and traffic diversion. No tree cutting will be required as per preliminary design.</p> <p>The existing distribution system is very old and will be completely phased out except DI lines Majority of the existing pipes are of AC; new pipes will be laid without disturbing the existing pipes, which will be left as it is in the ground untouched</p> <p>Sardarshahar town has existing 05 km of AC pipes of different diameter.</p> | <table><tr><td></td><td></td></tr><tr><td>Krishna Medical Gali (3m wide )</td><td>Private busstand road (6-7m wide)</td></tr><tr><td></td><td></td></tr><tr><td>Chaudhary Medical Agency Gali (3.5 m wide)</td><td>Arjun Club CHC Road (3.5 m wide )</td></tr></table> |  |  | Krishna Medical Gali (3m wide ) | Private busstand road (6-7m wide) |  |  | Chaudhary Medical Agency Gali (3.5 m wide) | Arjun Club CHC Road (3.5 m wide ) |
|    |    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                     |                                                                                     |                                 |                                   |                                                                                       |                                                                                       |                                            |                                   |
| Krishna Medical Gali (3m wide )                                                       | Private busstand road (6-7m wide)                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                     |                                                                                     |                                 |                                   |                                                                                       |                                                                                       |                                            |                                   |
|  |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                     |                                                                                     |                                 |                                   |                                                                                       |                                                                                       |                                            |                                   |
| Chaudhary Medical Agency Gali (3.5 m wide)                                            | Arjun Club CHC Road (3.5 m wide )                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                     |                                                                                     |                                 |                                   |                                                                                       |                                                                                       |                                            |                                   |


| Sr. No | Subproject component         | Environmental Features of the Site                                                                                                                                                                                                                                          | Photographs                                                                                             |                                                                                     |
|--------|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|        |                              |                                                                                                                                                                                                                                                                             |                      |  |
|        |                              |                                                                                                                                                                                                                                                                             | Arjun Club CHC Road 2<br>(3.5 m wide )                                                                  | Bukalsar Bas Road (3 m wide )                                                       |
|        |                              |                                                                                                                                                                                                                                                                             |                      |  |
|        |                              |                                                                                                                                                                                                                                                                             | Mava Bhandar Road (4 m wide)                                                                            | Omkara Guest House ROAD (4 m wide)                                                  |
| 9      | Rehabilitation of Tube wells | <p><i>Rehabilitation</i></p> <ul style="list-style-type: none"> <li>• Out of total existing 45 tube/open wells in town, Rehabilitation work to be done for 26 tube /open wells</li> <li>• Replacement of pipes, pumps, valves, all electro-mechanical items etc.</li> </ul> | <p>TWs at different locations in town.</p> <p>Location map of tube wells is attached in Appendix 16</p> |                                                                                     |

Figure 18: STP (Existing and designed) North Campus and Disposal Point





Figure 19: STP (Existing and Designed ) SouthCampus and Disposal Point

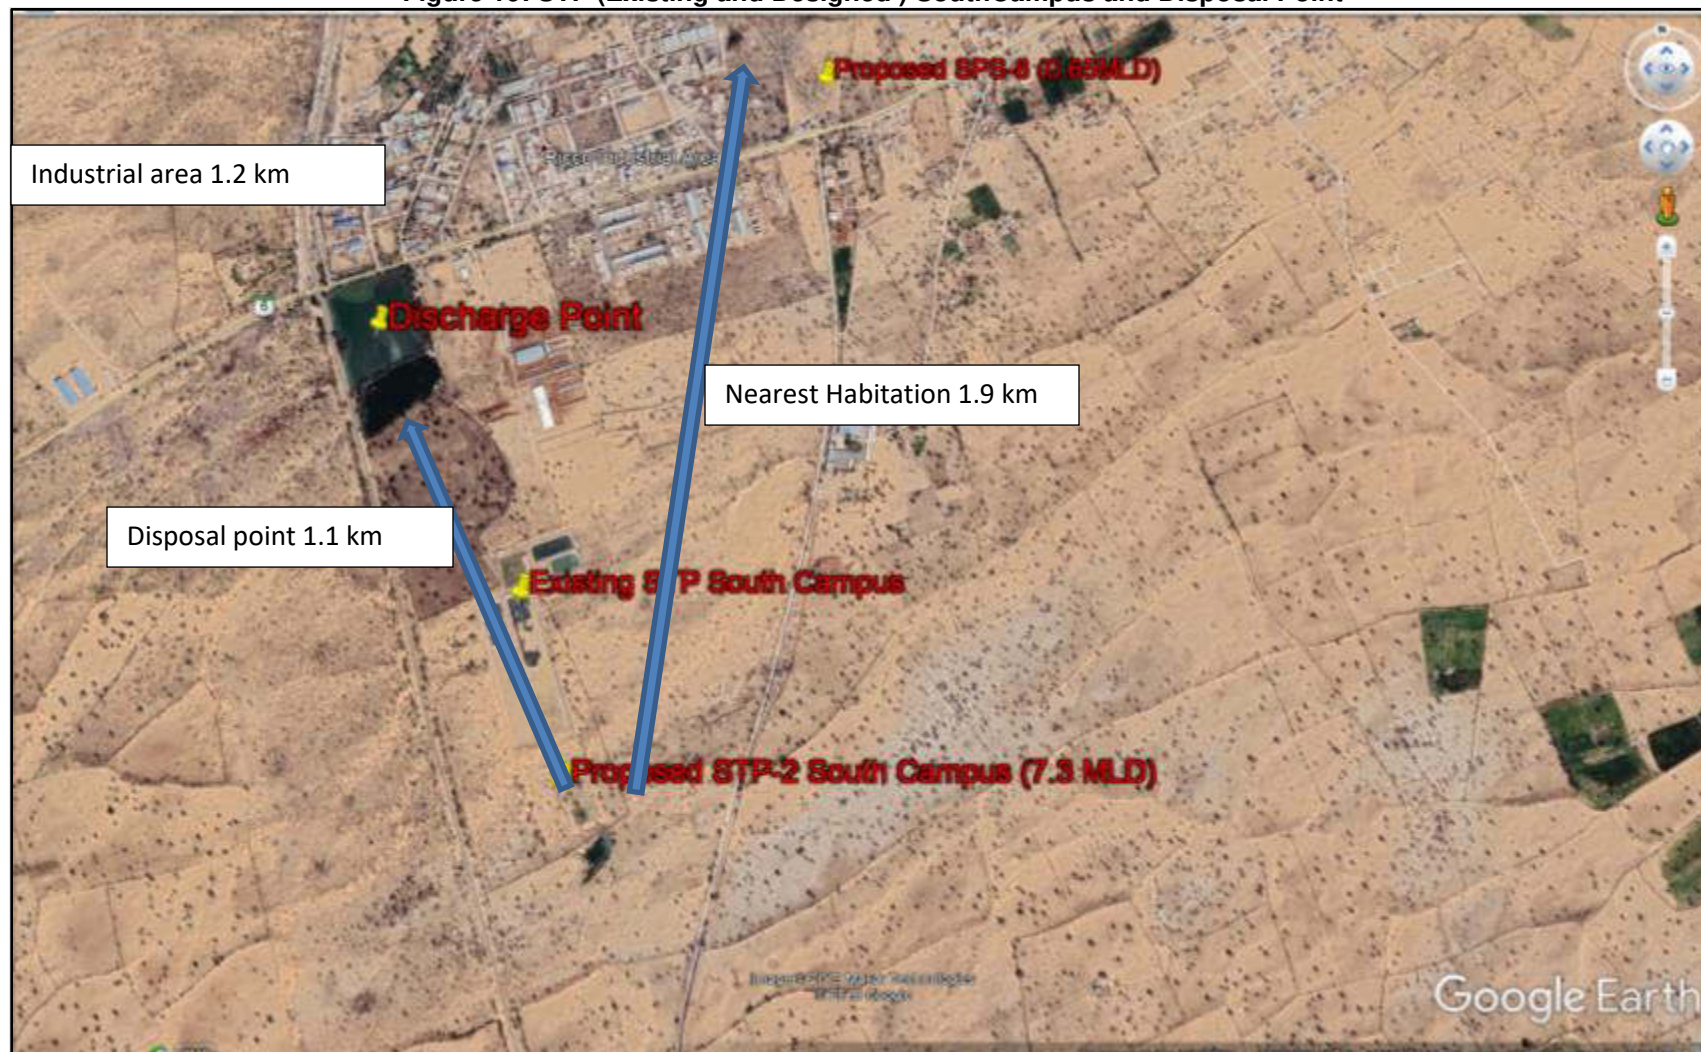

STP South Disposal point 28°25'12.02"N/ 74°28'46.62"E

## VI. ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

### A. Introduction

129. Potential environmental impacts of the designed infrastructure components are presented in this section. Mitigation measures to minimize/mitigate negative impacts, if any, are recommended along with the agency responsible for implementation. Monitoring actions to be conducted during the implementation phase is also recommended to reduce the impact.

130. Screening of potential environmental impacts are categorized into four categories considering subproject phases: location impacts and design impacts (pre-construction phase), construction phase impacts and operations and maintenance phase impacts.

- (i) **Location impacts** include impacts associated with site selection and include loss of on-site biophysical array and encroachment either directly or indirectly on adjacent environments. It also includes impacts on people who will lose their livelihood or any other structures by the development of that site.
- (ii) **Design impacts** include impacts arising from Investment Program design, including technology used, scale of operation/throughput, waste production, discharge specifications, pollution sources and ancillary services.
- (iii) Pre-construction impacts include impacts which are anticipated during construction works but planning are required for designed mitigation measures before start of construction works i.e. during SIP period such as taking consents from various departments, planning for construction and workers camps, deployment of safety officer, arrangement of required barricades and caution boards etc.
- (iv) **Construction impacts** include impacts caused by site clearing, earthworks, machinery, vehicles and workers. Construction site impacts include erosion, dust, noise, traffic congestion and waste production.
- (v) **Operation and maintenance (O&M) impacts** include impacts arising from the operation and maintenance activities of the infrastructure facility. These include routine management of operational waste streams, and occupational health and safety issues.

131. Screening of environmental impacts has been based on the impact magnitude (negligible/moderate/severe - in the order of increasing degree) and impact duration (temporary/permanent).

132. This section of the IEE reviews possible project-related impacts, in order to identify issues requiring further attention and screen out issues of no relevance. ADB SPS (2009) require that impacts and risks will be analyzed during pre-construction, construction, and operational stages in the context of the project's area of influence.

133. The ADB Rapid Environmental Assessment Checklist has been used to screen the project for environmental impacts and to determine the scope of the IEE.

134. In the case of this project (i) most of the individual elements are relatively small and involve straight forward construction and operation, so impacts will be mainly localized and not greatly significant; (ii) most of the predicted impacts are associated with the construction process, and are produced because that process is invasive, involving excavation and earth movements; and (iii) being located in an urban area, will not cause direct impact on biodiversity values. The project will be in properties held by the local government body and access to the

project location is through public rights-of-way and existing roads hence, land acquisition and encroachment on private property will not occur.

## **B. Pre-Construction Impacts – Design and Location**

### **1. Location Impacts**

135. **Odour Nuisance from STPs.** As presented in the baseline profile, the three designed STP sites are identified away from habitation, and two STP are designed within existing STP campus and do not have any notable sensitive environmental features with no tree cover / vegetation. As the habitations located away from the sites, and, the designed treatment technology, SBR, being an aerobic process and conducted in a compact and a closed system with automated operation, odour nuisance will be very minimal and negligible. Limited bad odors may be generated from wet well, primary treatment units and sludge treatment. Mitigation measures as per RUDSICO-EAP policy on compensatory afforestation should be adopted.

- (i) Provide a green buffer zone of 10-20 m wide all around the STPs with local varieties of trees in multi-rows. This will act as a barrier and visual screen around the facility and will improve the aesthetic appearance. Treated wastewater shall be used for plantation;
- (ii) Develop layout plan of STP such that odour generating units (such as sludge / solids handling facilities) are located away from the surrounding area with future development potential.

136. **Physical Cultural Resources.** There are no notable or significant archeological places or protected monuments or areas in Sardarshahar project area. Therefore, no impacts envisaged but risk of uncovering archeological remains, given the long history of town, during the excavations cannot be ruled out completely. Construction contractors therefore should follow the below measures in conducting any excavation work:

- (i) Create awareness among the workers, supervisors and engineers about the chance finds during excavation work;
- (ii) Stop work immediately to allow further investigation if any finds are suspected;
- (iii) Inform local Archeological Department / Museum office if a find is suspected and take any action, they require to ensure its removal or protection in situ; and
- (iv) Prepare a chance find protocol (sample is provided in Appendix 12).

137. **Tree cutting at project sites.** There are no notable tree cover or vegetation in STP and SPS sites. One tree is present at CRMC site at Fire Station and few trees present at proposed CWR, CRMC, CCC and pump house site at PHED campus. Water pipelines and sewers will be laid along the road within road right of way. There are no notable trees in the alignment, therefore no tree cutting is envisaged during pipe laying works. Following measures need to be implemented to minimize and/or compensate for the loss of tree cover.

- (i) Minimize removal of trees by adopting to site condition and with appropriate layout design of STP/ CWR or any other site with trees;
- (ii) Obtain prior permission for tree cutting at STP/ CWR site or at any other site that may require tree cutting finalized during detailed design;
- (iii) Plant and maintain 3 trees for each tree that is felled.



## 2. Design Impacts

138. **Design of the Components.** The Central Public Health and Environmental Engineering Organization (CPHEEO) manual suggests a design period of 15/30 years in general while designing the systems for water supply and sewerage components. It is designed to consider 2051 as the design year for all the components in order to maintain unanimity in the design period and design population. Accordingly, 2021 shall be the base year and 2036 the intermediate year to cross check the designs pertaining to intermediate demand. The rate of water supply has been taken as 135 lpcd for 100% population. Sewage generation is 85 percent of water supply (including 5 percent to account for infiltration). Technical design of all the elements of water supply (reservoirs, pumping, transmission and distribution system etc.,) and sewerage (STP, reuse arrangements, sewer mains and network including manholes and house connections, etc., follows the relevant national planning and design guidelines, include the Sewerage and Wastewater Policy of Rajasthan 2016.

139. Following environmental considerations are already included in the project to avoid and/or minimize adverse impacts and enhance positive benefits:

- (i) Adopting conjunctive use approach in water use; utilizing feasible surface water sources and groundwater source optimally thereby reducing the existing groundwater abstraction to the extent possible;
- (ii) Locating components and facilities appropriately by avoiding sensitive locations like forests and protected areas (environmentally, socially, and archeologically);
- (iii) Recovering wash water from treatment process to optimise the water use;
- (iv) Treatment and reuse of sludge from treatment process; providing a covered shed of adequate space to air dry the processed sludge for at least 15 days at STPs;
- (v) Designing the entire system to maintain optimal flow and terminal pressure, and optimising the overall energy usage;
- (vi) Avoiding usage of asbestos containing materials;
- (vii) Reducing the incidence of water borne diseases by providing 100% population including urban poor with potable water supplies;
- (viii) Reuse of treated wastewater from STP for non-potable uses thereby reducing the load in freshwater resources;
- (ix) Adopting a combined approach of sewerage system and faecal sludge and septage management to cover 100% population of the town with safe collection, conveyance and treatment of sewage generated in the town; and
- (x) Provision of appropriate personal protection equipment to the workers and staff.

140. **Water Source Sustainability:** Based on designed water supply rate of 135 lpcd for Sardarshahar town, the total raw water demand is estimated as 17.90 MLD (base year 2021), and 25.25 MLD (ultimate design year 2051). Nearest surface water sources form IGNP canal is considered as sources of supply.

### Water Reservation for Sardarshahar

141. The total water reserved for Sardarshahar from Sahwa Lift Canal is 16 MLD which suffices the requirement till 2021, However for 2036 there is an extra requirement of almost 5.4 MLD, which needs to be catered from Bore Wells located at Sardarsahar, and for 2051 the shortage of 9.2 MLD needs to be addressed through an augmentation scheme for Sardarshahar Town from Sahwa Lift Canal or through bore wells.

142. **Source:** Main Source of Sardarshahar town water supply is Indira Gandhi water canal from thereon Sahwa lift Canal emanate which is used to feed water to the existing WTP of 70 MLD capacity at Dhannasar (Dhannasar Water Treatment Plant). Dhannasar WTP is part of AAPNI Yojna Asia's largest rural drinking water supply project. Also, under the Phase II Aapni Yojna, there is a provision for the construction of new 160 MLD WTP at the same premises. Currently from Dhannasar WTP water is being fed to Sardarshahar CWR located at Hanumangar Road (PHED campus) with intermediate Pumping Station at Palloo and Sadasar by 1100 dia PSC pipeline. Present population of town is 104170 & present water production is 12 MLD. Groundwater source currently, tube wells also play a role in Sardarshahar water supply system which is situated in the city limits. There are 48 tube wells/open wells harnessed with individual production of 225-300 LPM (10.00 MLD approx.).

143. **Bore Wells:** At present nearly 10MLD of Water is being supplied from the Bore Wells. There are 48 No's of Existing Bore Wells located within the municipal Limit of Sardarshahar Town, out of which 45 No's of Bore Wells of capacities varying from 12 KL/hr to 18 KL/hr are working for a period of 4 Hrs to 12 hrs daily depending upon requirement (remaining 3 being defunct for the last one year). Tube Well discharge along with the Pipeline connecting Tube Wells to CWR is provided in below:

- Approx. Discharge in a Tube Well 250LPM = 13500LPH.
- Pumping Hours of Tube Wells = 18 Hours.
- Total Discharge/Tube Well = 0.26 MLD.
- Total No. of Tube Wells Required till 2036 =  $5.4/0.26 = 24$  No's, Therefore Provide 26 Tube Wells in case of some being defunct.
- Total No. of Tube Wells required till 2051 =  $9.2/0.26 = 39$  No's.
- Therefore, there is a requirement of additional 10-12 Tube Wells considering the horizon Year 2051.

144. All these Tube Wells are existing, currently connected directly to the Distribution system of the town. It is designed to connect these Tube Wells to the Designed CWR 2400 KL at Hanumangarh Head Works. Therefore, existing Pumping arrangements are to be replaced with new ones and rising main lines are to be laid in the designed scheme.

145. **Design of Sewage Treatment Plant.** Three STPs of capacities 2.30 MLD, 3.40 MLD and 1.60 MLD is designed to be constructed at the identified sites to treat the sewage generated from Sardarshahar town. It is designed to establish STP based on SBR (sequential batch reactor) process, followed by disinfection by chlorine. As the bid is DBO type, detailed design of the STP will be carried out by the contractor to the following specific discharge standards. Currently for STPs in India, the standards notified by Ministry of Environment, Forests and Climate Change (MOEFCC) in 2017 (see column (4) in table below) are applicable. However, under RSTDSP, PMU has decided to base the STP design on discharge standards for STPs suggested by CPCB in 2015, which are more stringent. The strident standards also facilitate maximum utilization of treated wastewater for reuse in various purposes following the Sewerage and Wastewater Policy, 2016, of Rajasthan<sup>16</sup>. It is also to be noted that, in April 2019, the National Green Tribunal (NGT) in one of its orders directed MOEFCC to reconsider stringent standards for STPs.

---

<sup>16</sup> "The use of treated wastewater in irrigation and industrial application shall be given the highest priority and shall be pursued with care. Effluent quality standards shall be defined based on the best attainable treatment technologies, and calibrated to support or improve ambient receiving conditions, and to meet public health standards for end users".

**Table 11: Designed Raw and Treated Wastewater Characteristics for STP Design**

| S. No | Parameter                              | Designed Discharge Standards for Sardarshahar STPs | MOEF&CC STP Discharge Standards, 2017 | CPCB discharge standards, 2015# | IFC Guideline value for sewage discharge | WHO Guideline Value for safe use in agriculture |
|-------|----------------------------------------|----------------------------------------------------|---------------------------------------|---------------------------------|------------------------------------------|-------------------------------------------------|
| 1     | pH                                     | 6.5 – 9.0                                          | 6 – 9                                 | 6.5-9.0                         | 6 - 9                                    | 6 – 9                                           |
| 2     | Biochemical Oxygen Demand (BOD) (mg/l) | ≤10                                                | <30<br><20 (metro cities)             | <10                             | 30                                       | -                                               |
| 3     | Chemical Oxygen Demand (COD) (mg/l)    | ≤50                                                | -                                     | 50                              | 125                                      | -                                               |
| 4     | Total Suspended Solids (TSS) (mg/l)    | ≤20                                                | <100 and<br><50                       | <20                             | 50                                       | -                                               |
| 5     | Total Nitrogen (mg/l)                  | <10                                                | -                                     | <10                             | 10                                       | -                                               |
| 6     | Ammonical Nitrogen (mg/l)              | <5                                                 | -                                     | <5                              | -                                        | -                                               |
| 7     | Total Phosphorus (mg/l)                | -                                                  | -                                     | -                               | 2                                        | -                                               |
| 8     | Fecal Coliform MPN/100 ml              | 100 (Desirable) and 230 (Permissible)              | <1000                                 | <100                            | -                                        | <1000                                           |
| 9     | Oil and grease, mg/l                   | -                                                  | -                                     | -                               | 10                                       | -                                               |
| 10    | Nematodes, number of eggs per litre    | -                                                  | -                                     | -                               | -                                        | 1                                               |

MOEF&CC= Ministry of Environment, Forest and Climate Change; CPCB = Central Pollution Control Board; IFC = International Finance Corporation, the World Bank Group.

# in April 2019, the National Green Tribunal (NGT) in one of its orders directed MOEF&CC to reconsider the standards issued in 2015 for STPs.

**146. Treated wastewater Reuse / disposal.** Rajasthan is a water scarce region and receives low rainfall. Recognizing the importance of treated wastewater in reducing the demand on water, Sewerage and Wastewater Policy, 2016, of Rajasthan promotes the reuse of treated sewage for non-potable applications, and to make sewerage projects environmentally sustainable. Government of Rajasthan adopted this policy to ensure “improved health status of urban population, specially the poor and under privileged, through the provision of sustainable sanitation services and protection of environment”. To further promote the reuse and provide guidance, Policy prioritized reuse in irrigation (agriculture, forestry, and landscaping), followed by fish farming, industry and non-potable domestic reuse. Policy requires monitoring of treated wastewater quality, soil quality etc., Policy prohibits artificial recharge of aquifers using treated wastewater, and promotes construction of storage tanks to store treated wastewater to facilitate reuse. Policy prescribes that the detailed project report (DPR) should clearly define the best reuse option specific to the town and prepare a Reuse Action Plan part of the DPR following water quality norms and legal implications. LSGD is currently in the process of publishing Guidelines for Reuse of Treated Wastewater in Rajasthan 2019 to promote the reuse and provide guidance to the stakeholders. Guidelines promotes the use the treated wastewater and envisages to maximize the collection and treatment of sewage generated and reuse of treated wastewater on a sustainable basis, thereby reducing dependency on freshwater resources.

147. Policy provided priority to reuse in agricultural for unrestricted irrigation. It suggests blending of treated wastewater with fresh water to improve quality where possible, and crops to be irrigated shall be selected to suit the irrigation water, soil type and chemistry. Policy requires monitoring of accumulation of heavy metals and salinity. It encourages farmers to use modern and efficient irrigation technologies, and to ensure protection of on-farm workers and crops. As a contingency measure, policy requires regular monitoring of treated water quality, and emergency alerts to users in any event of deterioration of quality. Policy prohibits use of treated wastewater for artificial recharge (Excerpts from Policy on Reuse is provided in Appendix 18).

148. During rainy season treated effluent will be disposed to nearby available natural drain/ depression/ low lying area, provision of pipe from STP to ultimate disposal point is already taken as per location agreed by Municipal Board and Employer Representative. Sardarshahar is situated in the heart of the Thar Desert. Sardarshahar is fall under Sandy Zone. The soil condition Alluvium and blown sand, there are no natural perennial rivers, streams drain/ nallah outer area of Sardarshahar due to Dunes shifting and sand hills.

149. **Reuse Options.** Following the Sewerage and Wastewater Policy, 2016, the draft Guidelines on Reuse provides the following reuse applications:

- (i) Agriculture, horticulture, irrigation;
- (ii) Gardening in park;
- (iii) Road washing and water sprinkling to reduce fugitive dust;
- (iv) Industries including mining;
- (v) Recreational ponds and lakes;
- (vi) Social forestry;
- (vii) Construction Activities;
- (viii) Firefighting and other municipal uses;
- (ix) Railway;
- (x) Thermal power plants;
- (xi) Cantonments; and
- (xii) Individual Users

150. **Allocation of treated wastewater for reuse.** Treated sewage will also be used by the Gaushala Shamiti for their internal purposes. As per the agreement Gaushala Samiti is said to utilise 70% of the Treated Effluent water from the STP's, the remaining 30% will be utilised by the Municipal Corporation of Sardarshahar Town for North & South STP locations.

151. Further, STP designed in Gandhi Vidya Mandir (GVM) premises, As per the condition Gaushala Samiti is said to utilise 100% of the Treated Effluent water from the STP. In the worst case in case of any non-utilisation of treated effluent and in case of any major breakdown of STP, treated effluent will be directly disposed to the following locations as mentioned below:

1. STP (GVM)- 1.6MLD, Ginani Clock Tower Road (28°26'28.64"N-74°30'29.30"E).
2. STP- North 3.4 MLD, Ginani near Existing STP North (28°26'43"N-74°28'32"E).
3. STP-South 2.3 MLD, Ginani near Existing STP South (28°25'10.39"N- 74°28'44.06"E)

152. During rainy season treated effluent will be disposed to nearby natural drain provision of pipe from STP to ultimate disposal point is already taken as per location agreed by Municipal Board and Employer Representative. Memorandum of understanding between ULB and the users of the treated water (Appendix 32 and Appendix 33) and NOC form Gaushala samiti for discharge of treated water is provided in Appendix 32.

153. **Reuse Plan.** The State Policy require the Sewerage Detailed Project Report provide reuse options and strategy to implement reuse, and detailed Reuse Action Plan. As the Sardarshahar subproject is designed under DBO, the Reuse plan will be prepared by the DBO contractor during the detailed design phase in consultation with the stakeholders in Sardarshahar, and reuse modalities will be firmed up. Subproject includes following components as part of the STP to facilitate reuse: disinfection of treated wastewater, Treated effluent storage reservoir (TESR), effluent pumping station and a treated effluent elevated reservoir (TEER). At STP-South (2.30 MLD) one treated effluent storage reservoir (TESR) of 370 KL, Treated Effluent Elevated Reservoir (TEER) 730 KL at STP- North (3.40 MLD) one TESR of 270 KL, TEER of 540 KL and for STP (GVM) (1.6MLD) one TESR of 80 KL, TEER of 160 KL. All three TEERs will have 22 m staging and treated effluent Pump House of required capacity 16 hrs pumping, which will mainly facilitate supply to reuse applications from the TESR. Treated effluent will be chlorinated prior to its entry into TESR/TEER. Following needs to be considered in the preparation of reuse plan:

- (i) As part of the plan, identify potential reuse application in Sardarshahar and establish quality criteria for each of the use;
- (ii) For applications that use treated wastewater directly (e.g., agriculture), the quality required for such application in safe manner considering health, environment and crop yield concerns shall be ensured;
- (iii) Prepare a reuse plan for agriculture/ horticulture, clearly indicating the limits (geographical / crops / type of application / type of soils etc.); adopt international good practice suggested by agencies like World Health Organization (WHO), Food and Agricultural Organization (FAO) of the United Nations;
- (iv) Plan should include awareness and training provisions and responsibilities; these can be conducted by concerned department (e.g., Agricultural Department, District Collectorate);
- (v) Carryout regular / online monitoring of critical quality parameters of treated wastewater to ensure that they meet the preset standards established for reuse.

154. **Use of treated wastewater for irrigation.** Use of wastewater for irrigation is associated with some health risks – from germs in wastewater, which may contaminate food and spread disease, health risk to farm workers from worms (helminths) and nematodes and chemical risk is associated if industrial wastewater enter the sewers. If the wastewater with bacteriological contaminants are used for food crops like lettuce, tomato, which are eaten without peeling or cooking, it will present a greater health risk if precaution such as such washing with chlorinated water or storing for adequate time in normal temperature before use (at least 10 days). According to the WHO, effluent which is used to irrigate trees, industrial/commercial (not food, like cotton) and fodder crops, fruit trees, and pasture should have less than one viable nematode egg per liter. Effluent used for the irrigation of food crops, sports fields, public parks, should have and less than one viable nematode egg per liter and less than 1000 fecal coliforms per 100 milliliters. These shall be considered in the Reuse Plan that will be prepared during the detailed design and complied accordingly.

155. **Disposal of treated wastewater.** Designed STP sites are located close to dry water channels (drains) and the excess / surplus / unused treated wastewater will be discharge into this drain. As the wastewater is treated to stringent disposal standards, no notable impacts envisaged. Both the drains are mostly dry except during monsoon. They carry untreated wastewater from the surrounding areas town. The disposal of treated wastewater meeting the set quality standards, in fact, will improve the quality of water by dilution. There are no water intakes or abstraction points in the downstream proximity. STP sites are surrounded mostly by



agricultural and barren lands. Considering the existing status of drains, and the degree of treatment, no significant impacts envisaged. Proper systems should be put in place at the designed STP to ensure that treated wastewater always meet the stipulated standards prior to its disposal into drains. Any change / lowering of treatment efficiency during operation may lead to poor quality of wastewater and may further pollute the water body. It is therefore critical that STP treats the sewage as designed. Operation and maintenance of STP and change in incoming sewage quality will have impact on the treatment efficiency. This therefore requires monitoring:

- (i) Obtain of consent of RSPCB for discharge of treated wastewater into nearby drains;
- (ii) Regularly monitor the treated wastewater quality at STP and ensure that it meets the discharge standards;and
- (iii) Monitor water quality periodically during operation phase as per the Environmental Monitoring Plan.

156. During rainy season treated effluent will be disposed to nearby available natural drain/ depression/ low lying area, provision of pipe from STP to ultimate disposal point is already taken as per location agreed by Municipal Board and Employer Representative. Sardarshahar is situated in the heart of the Thar Desert. Sardarshahar falls under Sandy Zone. The soil condition Alluvium and blown sand, there are no natural perennial rivers, streams drain/ nallah outer area of Sardarshahar due to Dunes shifting and sand hills. No Objection Certificates (NOCs) are provided in Appendix 33.

157. **Sludge treatment and disposal.** Sewage sludge generally consists of organic matter, pathogens, metals and micro pollutants. The concentration of parameters such as metals can be influenced by input to the sewers system from industry. Since no industrial wastewater is allowed into sewers, it is unlikely that sludge contains heavy metals. Heavy metal concentration may not be ruled out completely as the chemicals used in treatment may potentially contains heavy metals, which will then leach into the sludge.

158. Subproject includes sludge management infrastructure in STP, including system for sludge collection, thickening, solar drying, and disposal at landfill/identified site. This includes a Sludge Sump to collect sludge from SBR basins; returning arrangement for supernatant from the sump to inlet/equalization tank for treatment; pumping sludge to sludge thickener and pumping thickened to mechanical sludge dewatering system (such as centrifuge). It also requires contractor to establish a shed where the dewatered sludge cake can be further air dried for 15 days. This is indicative sludge management system, and DBO contractor will design the system meeting these requirements. Bid indicates that “the sludge produced from the treatment process would be processed so it may be used as fertilizer and soil conditioner” and it requires DBO contractor “to conform to the regulations of public health and environment protection norms”. This follows the Sewerage and Wastewater Policy, 2016, which suggests “use of sludge produced from the treatment as fertilizer and soil conditioner after processing”. Other solid waste materials from sludge treatment should be covered by an environmentally compliant disposal management plan. Disposal to vacant lot (even if government land) should not be allowed. Other solid waste materials from sludge treatment should be covered by an environmentally compliant disposal management plan. Disposal to vacant lot (even if government land) should not be allowed.

159. The treatment and drying processes kill enteric bacteria and pathogens, and because of its high content of nitrates, phosphates and other plant nutrients the sludge is an excellent

organic fertilizer for application to the land. Adequate drying is however necessary to ensure maximum kill of enteric bacteria. To achieve adequate drying minimum drying period (15 days) shall be ensured. The drying period, which will be varying depending on the season will be determined during operation and be followed. A sludge management plan will be developed by the DBO contractor during the detailed design phase. Proper sludge handling methods should be employed. Personal Protection Equipment should be provided to the workers.

160. Contractor will design the sludge management plan with best methods for reuse of sludge as per guidelines of CPHEEO (guidelines are attached as Appendix 18) and best international practices in consultation with PMU and Municipal Council. Properly dried sludge can be used as soil conditioner. Periodic testing of dried sludge will be conducted to ensure that it does not contain heavy metals that make it unsuitable for food crops. Tests shall be conducted to confirm the concentrations below the following standards. As there are no specific standards notified for sludge reuse, the compost quality standards notified under the Solid Waste Management Rules, 2016 have been adopted here. Rules stipulate that “In order to ensure safe application of compost, the following specifications for compost quality shall be met”.

**Table 12: Standards for Sludge Reuse as Manure**

| Standards for Composting. As there are no specific standards notified for sludge reuse, the compost quality standards notified under the Solid Waste Management Rules, 2016 (Schedule II A, Standards for Composting) have been adopted here. According to the standards “In order to ensure safe application of compost, the following specifications for compost quality shall be met, namely: |                   |                                                          |                                                          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|----------------------------------------------------------|----------------------------------------------------------|
| Parameters                                                                                                                                                                                                                                                                                                                                                                                       | Units             | Organic Compost (FCO 2009)                               | Phosphate Rich Organic Manure (FCO 2013)                 |
| Arsenic                                                                                                                                                                                                                                                                                                                                                                                          | mg/kg             | 10                                                       | 10                                                       |
| Cadmium                                                                                                                                                                                                                                                                                                                                                                                          | mg/               | 5                                                        | 5                                                        |
| Chromium                                                                                                                                                                                                                                                                                                                                                                                         | mg/kg             | 50                                                       | 50                                                       |
| Copper                                                                                                                                                                                                                                                                                                                                                                                           | mg/kg             | 300                                                      | 300                                                      |
| Lead                                                                                                                                                                                                                                                                                                                                                                                             | mg/kg             | 100                                                      | 100                                                      |
| Mercury                                                                                                                                                                                                                                                                                                                                                                                          | mg/kg             | 0.15                                                     | 0.15                                                     |
| Nickel                                                                                                                                                                                                                                                                                                                                                                                           | mg/kg             | 50                                                       | 50                                                       |
| Zinc                                                                                                                                                                                                                                                                                                                                                                                             | mg/kg             | 1000                                                     | 1000                                                     |
| C/N ratio                                                                                                                                                                                                                                                                                                                                                                                        | -                 | <20                                                      | <20:1                                                    |
| pH                                                                                                                                                                                                                                                                                                                                                                                               | -                 | 6.5 – 7.5                                                | (1:5 solution) maximum 6.7                               |
| Moisture, percent by weight, maximum                                                                                                                                                                                                                                                                                                                                                             |                   | 15.0 – 25.0                                              | 25.0                                                     |
| Bulk density                                                                                                                                                                                                                                                                                                                                                                                     | g/cm <sup>3</sup> | <1                                                       | Less than 1.6                                            |
| Total Organic Carbon, percent by weight, minimum                                                                                                                                                                                                                                                                                                                                                 | percent by weight | 12                                                       | 7.9                                                      |
| Total Nitrogen (as N), percent by weight, minimum                                                                                                                                                                                                                                                                                                                                                | percent by weight | 0.8                                                      | 0.4                                                      |
| Total Phosphate (as P <sub>2</sub> O <sub>5</sub> ) percent by weight, minimum                                                                                                                                                                                                                                                                                                                   | percent by weight | 0.4                                                      | 10.4                                                     |
| Total Potassium (as K <sub>2</sub> O), percent by weight, minimum                                                                                                                                                                                                                                                                                                                                | percent by weight | 0.4                                                      | -                                                        |
| Odour                                                                                                                                                                                                                                                                                                                                                                                            |                   | Absence of foul Odor                                     |                                                          |
| Particle size                                                                                                                                                                                                                                                                                                                                                                                    |                   | minimum 90% material should pass through 4.0 mm is sieve | minimum 90% material should pass through 4.0 mm is sieve |

|                             |       |   |     |
|-----------------------------|-------|---|-----|
| Conductivity, not more than | dsm-1 | 4 | 8.2 |
|-----------------------------|-------|---|-----|

\* compost (final product) exceeding the above stated concentration limits shall not be used for food crops. however, it may be utilized for purposes other than growing food crops.

FCO = Fertilizer Control Order, Department of Agriculture, Government of India

161. In order to ensure the safe use of dried sludge, following should be followed:

- (i) Prepare a dried Sludge utilization plan for Sardarshahar with the help of Agriculture Department / CLC; plan should also include if any additional processing is required for sludge to use as soil conditioner;
- (ii) Plan should clearly various potential uses and demand in Sardarshahar and surroundings;
- (iii) Establish usage limits, where required, (geographical / crops / type of application / type of soils etc.); adopt international good practice suggested by agencies like World Health Organization (WHO), Food and Agricultural Organization (FAO) of the United Nations;
- (iv) Identify a landfill / suitable site for disposal of surplus dried sludge;
- (v) Monitor sludge quality during operation phase as per the Environmental Monitoring Plan, ensure that it meets the quality parameters established by FCO; and
- (vi) In case of sludge not meeting the quality parameters, it shall not be used as soil condition, and shall be disposed at appropriate disposal site (if it falls under hazardous category, it shall be disposed as per the Hazardous Waste Management Rules, 2016).

162. **Mixing of industrial effluent in wastewater.** One of the critical aspects in sewerage system operation is, change in raw sewage characteristics at inlet of sewage treatment plant may affect the process and output quality. STPs are designed for municipal wastewater, which does not include industrial effluent. Characteristics of industrial effluent widely vary depending on the type of industry, and therefore disposal of effluent into sewers may greatly vary the inlet quality at STP and will upset process and affect the efficiency. Various types of small to medium-scale industries are in Sardarshahar. Most of these industries generate wastewater from the process, which is generally treated at effluent treatment plants specifically established for the purposes and are not allowed into municipal sewers. While the project does not provide sewerage system in established industrial areas, there is a risk of industrial effluent joining municipal sewers from the small/household units established in town areas where sewers are being provided. Mixing of industrial effluent will severely deteriorate the quality of treated wastewater, and therefore the designed reuse. Reuse of such water may have significant impact on public health, and on land and water. Following measures should be incorporated to safeguard the sewerage system and the intended reuse:

- (i) No industrial wastewater shall be allowed to dispose into municipal sewers;
- (ii) As there is a risk of potential mixing of industrial waste, no domestic wastewater from industrial units shall be allowed into municipal sewers;
- (iii) Ensure that there is no illegal discharge through manholes or inspection chambers;
- (iv) Conduct public awareness programs in coordination with RSPCB and CLC; and
- (v) Conduct regular wastewater quality monitoring (at inlet and at outlet of STP) to ensure that the treated wastewater quality complies with the effluent standards.

163. **Sewer system** – collection and conveyance. The sewerage system is designed as a separate system of sewage collection (i.e., caters only to domestic wastewater). There is considerable length of existing surface drains in the project area that can be used for disposal of storm runoff. The underground gravity sewers will carry sewage from households to trunk sewers and further to STPs. To maximize the benefits as intended, Sardarshahar Municipality should ensure that all existing septic tanks in areas that are being provided by sewers are phased out by bypassing the inlet and connecting the toilet discharge from each house directly to sewerage system. Accumulation of silt in sewers in areas of low over time, overflows, blockages, power outages, harmful working conditions for the workers cleaning sewers etc. are some of the issues that needs to be critically looked into during the sewer system design. A properly designed system is a must for system sustainability. Measures such as the following shall be included in sewer system design to ensure that the system provides the benefits as intended:

- (i) Limit the sewer depth where possible;
- (ii) Sewers shall be laid away from water supply lines and drains (at least 1 m, wherever possible);
- (iii) In all cases, the sewer line should be laid deeper than the water pipeline (the difference between top of the sewer and bottom of water pipeline should be at least 300 mm);
- (iv) In unavoidable, where sewers are to be laid close to storm water drains, appropriate pipe material shall be selected (stoneware pipes shall be avoided);
- (v) For shallower sewers and especially in narrow roads, use small inspection chambers in lieu of manholes;
- (vi) Design manhole covers to withstand anticipated loads and ensure that the covers can be readily replaced if broken to minimize silt/garbage entry;
- (vii) Ensure sufficient hydraulic capacity to accommodate peak flows and adequate slope and gas vents in gravity mains to prevent buildup of solids and hydrogen sulfide generation;and
- (viii) Take necessary precautionary measures to protect sewer network, and to avoid disposal of solid wastes, debris, waste water into newly laid sewers from the time it is constructed to the start of operation phase.

164. **Fecal Sludge and Septage Management (FSSM).** The designed FSSM will help the ULB to cover entire population with safe disposal of human excreta by serving areas which are not feasible to be provided with a sewerage system. About 11.5% of population will be served by this method. Under the FSSM, fecal sludge / septage will be collected from the household level septic tanks using truck mounted mobile desludging equipment and transported to Sewage Treatment Plant (STP) for treatment. At this stage, the quantity of septage generated from this area is not available. This will be estimated during the detailed design phase, and number of mobile tankers required to collect the transport the septage to STP, frequency of collection depending on the size of septic tanks etc., will be worked out accordingly. IEE needs to be updated during the detailed design phase to reflect the final project design. Although handling, transportation and disposal into STP is completely mechanized, the system will however be operated by the workers, therefore proper precautions as workers will be dealing with highly harmful septage. Accessibility of septic tanks to mobile suction tankers to collect septage is critical for success of the septage management system. At STP, the septage will be mixed with the sewage and will be co-treated in the STP. Septage will be in concentrated and partially degraded form, and disposal of the same into STP inlet stream may upset the sewage treatment process, may generate bad odours, and may ultimately affect the quality of treated wastewater. Treatment process needs to be properly designed. Following measures are suggested for

implementation:

- (i) Conduct detailed survey of the households to be covered with FSSM to design the system to suit the local conditions, such as type of septic tanks and their location in the houses
- (ii) Create awareness program on the FSSM from collection to treatment system that will be adopted
- (iii) Design the sewage treatment process duly considering mixing of septage
- (iv) Ensure that the FSSM system is completely mechanized no human touch, even accidentally, from collection at household to discharge into STP, and in periodic cleaning of tankers
- (v) Demarcate a proper area for cleaning of mobile tankers in STP premises, and ensure that the wastewater shall be discharged into STP
- (vi) Provide proper training to the workers, and staff in safe handling of FSSM tasks, provide all necessary personal protection equipment, eliminate any risks to the workers and the communities by providing proper training and necessary PPEs to workers. Safeguards induction prior to start of works will include detailed instructions handling, managing and protection from diseases and other biological hazards
- (vii) Ensure proper facilities for workers including showers, wash areas, toilets, drinking water, eating and resting places
- (viii) Conduct regular health checks
- (ix) Prepare Health and Safety Plan for FSSM

### **C. Environmental Audit of Existing Water Supply Infrastructure**

165. It is designed to utilize existing water supply infrastructure like tube wells, clear water reservoirs, pump houses etc. with necessary improvements. As per the ADB SPS 2009, these are associated facilities and therefore the component operation shall comply with the ADB and applicable environmental laws of India. Besides, ADB SPS lays emphasis on impacts and risks on biodiversity and natural resources, pollution prevention abatement including hazardous waste, occupational health and safety, community health and safety, and physical cultural resources. A random environmental audit is conducted to (i) assess the compliance of the existing infrastructure with environmental legislations and (ii) improve environmental performance to minimize future potential liabilities. The preliminary audit note is given in Appendix 19. A more detailed environmental audit and risk assessment shall be carried out during detailed design stage and incorporated into the final IEE.

166. All the existing infrastructure facilities are located in Sardarshahar town, which is an urban area and where there are no protected or sensitive environmental areas such as forests, wildlife sanctuaries or archeologically protected areas. Therefore, there are no risks or impacts on biodiversity and natural resources. The designed project will optimally utilize the surface and groundwater sources. Due to nature of components, the existing infrastructure components do not fall under the ambit of any environmental related regulations, and therefore there is no requirement of permissions or clearances. Presence of Asbestos Containing Material (ACM) in the form of asbestos cement pipes in the existing water supply infrastructure is a cause of concern due to its potentially hazardous nature. Project, however, do not include rehabilitation or repair of AC pipes, and the project, in fact, designed to discontinue the use of AC pipes. Presence of AC pipes in the existing facilities may create hazardous conditions for the workers and surrounding community. Besides, the generation and disposal of debris and discarded materials, and construction phase health and safety need to be considered and mitigated to

comply with the SPS provisions. Following table 12 provides component wise compliances and concerns. Corrective actions for the identified environmental concerns are discussed in the following section.

**Table 13: Environmental Audit of Existing Facilities**

| <b>Infrastructure</b>         | <b>Details</b>                                                                                                                                                                                                                                                                 | <b>Designed Rehabilitation</b>                                                                                                                                               | <b>Compliance with environmental regulatory framework</b> | <b>Environmental Concerns</b>                                                                                                                                                                    |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Tube wells and open wells     | 26 open wells and tube wells.<br>Ward no. 5,<br>Ward no. 10,<br>Ward no. 11,<br>Ward no. 13,<br>Ward no. 14,<br>Ward no. 15,<br>Ward no. 16,<br>Ward no. 17,<br>Ward no. 18,<br>Ward no. 19,<br>Ward no. 20,<br>Ward no. 23,<br>Ward no. 24,<br>Ward no. 31 and<br>Ward no. 36 | Replacement of pipes, submersible pumps, cables, panels, valves, flow meters and synchronization with SCADA enabled devices<br>Depth of the tube wells will not be increased | No requirements under existing laws                       | Occupational health and safety, public safety during the construction works<br><br>Disposal of discarded material, debris<br><br>There are no asbestos containing material / AC pipes noticed    |
| Clear water reservoirs (CWRs) | 1 CWR<br><br>PHED Campus Hanumangarh road                                                                                                                                                                                                                                      | Civil repairs and rehabilitation, replacement of pipes, connections, electrical and mechanicals parts as required<br>Cleaning                                                | No requirements under existing laws                       | Storage of AC pipes in existing campus<br><br>Occupational health and safety, public safety during the construction works<br><br>Disposal of discarded material, debris including AC pipes       |
| OHSRs                         | There are 4 Nos of OHSR in Sardarshahar. The following four existing structures are to be repaired / rehabilitated:<br><br>Bairudan, Holidhora, Suryamandir, & Ramnagar,                                                                                                       | Civil repairs and rehabilitation, replacement of pipes, connections, electrical and mechanicals parts as required<br><br>Cleaning                                            | No requirements under existing laws                       | Presence of AC pipes in existing connections<br><br>Occupational health and safety, public safety during the construction works<br><br>Disposal of discarded material, debris including AC pipes |
| Pluming stations              | 1 pumping stations (PHED campus Hanumangarh Road)                                                                                                                                                                                                                              | Replacement of pumps, motors<br>Civil repairs and rehabilitation, replacement of pipes,                                                                                      | No requirements under existing laws                       | Presence of AC pipes in existing connections<br><br>Spillage of oils, lubricants etc.,                                                                                                           |



| Infrastructure                | Details                                                                                                                  | Designed Rehabilitation                                                                                                                                   | Compliance with environmental regulatory framework | Environmental Concerns                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                               |                                                                                                                          | connections, electrical and mechanicals parts as required                                                                                                 |                                                    | Occupational health and safety, public safety during the construction works<br><br>Disposal of discarded material, waste oils, mechanical and electrical parts, debris including AC pipes                                                                                                                                                                                                                                                                                                            |
| Transmission and distribution | Existing Transmission mains: 21 km, 200-350 mm diameter pipes and existing distribution: 42 km, 75-315 mm diameter pipes | Replacement; new pipes will be laid in the place of existing pipes<br><br>Pipes will be left as it is in the ground, no rehabilitation / removal designed | No requirements under existing laws                | About 9,440 m of 100 to 200 mm dia of AC pipes removed from rural area of Sardarshahar are stored at PHED campus and around 5,000 m of AC pipes are laying in the ground<br><br>Exact location and condition of AC pipes not known; no maps available.<br><br>Accidental disturbance / need to remove in narrow roads<br><br>Occupational health and safety, public safety during trenching<br><br>Disposal of AC pipes / debris, Appendix 35 provides storage area of AC pipes during construction. |

167. **Corrective Measures.** As presented in the above table, there are no regulatory non-compliance issues in the existing infrastructure. The environmental concerns are mainly related to occupational health and safety, public safety, disposal of debris, discarded materials etc., A work specific environmental management plan needs to be prepared for these aspects. The exact nature of rehabilitation and repair works will be known only during the detailed design phase as the detailed technical audit will be conducted by the DBO contractor and the required rehabilitation and repair measures will be designed accordingly. Therefore, a separate EMP will be prepared for rehabilitation works during the detailed design phase by the DBO contractor, and reviewed and approved by PMU/consultants, and the same will be implemented by the DBO contractor. These are included in the EMP.

168. **Presence of asbestos containing material (ACM),** mainly AC pipes, in the existing

infrastructure is the main concern. Asbestos is recognized as a cause of various diseases and is considered health hazard if inhaled.

169. **Most of the AC are old.** There is no use of new AC pipes but for repairing work in the existing network, and for replace the damaged sections, AC pipes are being used. There will be no use of any AC pipe in the future as under the present project, water supply network is being provided in the entire town with non-AC pipes. It is normal practice in Rajasthan that existing AC pipes are left as it is in the ground and new pipes will be laid in a new alignment. As per the discussion with the local water supply staff in Sardarshahar, existing AC pipes are laid long back, they are deep in ground, more than 2 m at many places, as the road level has raised considerably. In wider roads, there will be adequate space to lay the new pipelines, and therefore there is no need to remove the existing pipelines.

170. However, complete avoidance of handling and disposal of AC pipes may not be possible. There are narrow lanes, where AC pipes may be encountered during the laying of new pipes. Some connections / inlet / outlet pipes at the existing CWRs are also of AC pipes. These will be removed and replaced with new non-AC pipes. At present no maps available on the exact location / position of AC pipes. The local long serving O and M staff of PHED seem to be well aware of the location of AC pipes in the roads. Consultation with the staff indicates that of the total 5 km of underground AC pipes, about 20% may be required to be removed, especially in the narrow lanes to lay the new lines. This will be about 1 km length of water pipes.

171. A temporary storage area shall be provided in the project site by the PMU. Asbestos materials present and removed from the construction activities will be temporarily maintained at the identified area. The temporary storage area shall be constructed by the DBO contractor based on the specifications of the asbestos management service contractor.

172. Bureau of Indian Standards (BIS) Guidelines for Safe Use of Products containing Asbestos states that “Asbestos cement products (such as AC pipes) generally contain about 10-15% asbestos fibers in a cement matrix that comprises the rest of the materials and are termed as locked in asbestos products as these products have the asbestos fibers bound in cement. There is very little possibility of generation of airborne asbestos fibers during any reasonable handling, storage, and use of such products. However, during storing and installation, recommended work practices shall be followed to avoid harmful exposure”. According to Hazardous and Other Wastes (Management and Transboundary Movement) Rules, 2016, any waste having asbestos concentration limit of 10,000 mg/kg (i.e. 1%), however this will apply only if the asbestos containing substances are in a friable, powdered or finely divided state. Under the Basel Convention<sup>17</sup>, asbestos or asbestos waste in the form of dust and fibers is classified as hazardous waste.

173. Working with or handling AC pipes in manner that produces dust, fibers, air borne particles etc., is very harmful and hazardous to the workers and general public around the work sites. The condition of existing underground AC pipes is not known, however, as these are old, pipes may be in deteriorated conditions. Condition needs to be assessed to check whether it is in friable form or in a condition in which it can release fibers before it is subjected any disturbance or removal.

174. During the IEE preparation, an expert on Asbestos and ACMs was mobilized to assist

---


<sup>17</sup> Basel Convention on the Control of Transboundary Movements of Hazardous Wastes and their Disposal, adopted in 1989

PMU to conduct an assessment and field validation of the extent of asbestos cement materials covered under the RSTDSP subprojects. The assessment has indicated that specific measures are necessary to safeguard the health and safety of the nearby communities and the potential contractors consistent with the requirements of the ADB SPS 2009. Activities such as clearing, transfer and disposal of AC pipes, work in narrow streets, and interventions in existing AC pipes may have adverse impacts on workers and surrounding population. Air borne asbestos if handled unsafely, cut, drilled or broken into pieces that may cause health issues such as Inflammation of the lungs, Mesothelioma, Peritoneal mesothelioma, Pleural plaques, Asbestosis and Bronchogenic Carcinoma. Following measures are to be implemented to avoid any impacts:

- (i) Develop and implement the ACM Management Plan (AMP) that includes identification of hazards, the use of proper safety gear and disposal methods. Sample AMP is provided in Appendix 20. Adhere to the workflow process suggested in Figure 20;
- (ii) Conduct awareness program on safety during the construction work;
- (iii) Undertake the construction work stretch-wise; excavation, pipe laying and trench refilling should be completed on the same day;
- (iv) Provide barricades, and deploy security personnel to ensure safe movement of people and also to prevent unnecessary entry and to avoid accidental fall into open trenches;
- (v) Identify risk of intervention with existing AC pipes. If there is significant risk, implement the AMP strictly that includes identification of hazards, the use of proper safety gear and disposal methods;
- (vi) Appropriate actions as defined in the Asbestos Management Plan will have to be adhered to; and
- (vii) Maintain records of AC pipes as per the AMP.

**Figure 20: ACM Management Plan – Work Process Flow Chart**

ANNEX 1 – ACM Management Plan

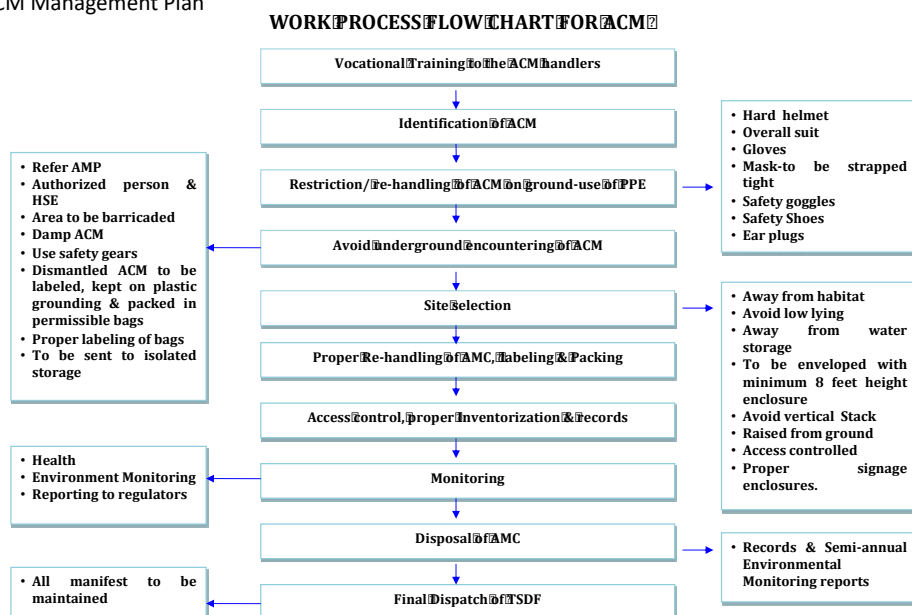

175. Requirement for the Contractor and the Subcontractor. The following are operational requirements related to works involving asbestos:

- (i) engaging certified and competent asbestos service provider to identify, handle and remove the asbestos materials present and encountered in the project sites;
- (ii) adopting good practices per EHS Guidelines<sup>18</sup> to minimize the health risks associated with asbestos materials by avoiding their use in new construction and renovation, and, if installed asbestos-containing materials are encountered, by using internationally recognized standards and best practices to mitigate their impact;<sup>19</sup>
- (iii) training of workers and supervisors, possession of (or means of access to) adequate equipment and supplies for the scope of envisioned works, and a record of compliance with regulations on previous work;
- (iv) removal, repair, and disposal of ACM shall be carried out in a way that minimizes worker and community asbestos exposure, and require the selected contractor to develop and submit a plan, subject to the PMU and PIU's acceptance, before doing so;
- (v) providing adequate protection to its personnel handling asbestos, including respirators and disposable clothing;
- (vi) notifying the Rajasthan State Pollution Control Board (RSPCB) of the removal and disposal according to applicable regulations as indicated in the technical requirements and cooperating fully with representatives of RSPCB during all inspections and inquiries.

176. PMU will engage an Asbestos Management Specialist to provide training and awareness, and to coordinate with various stakeholders on the risks, management, and mitigation measures required for the identification, safe handling, transport and disposal of the asbestos materials.

#### **D. Pre-construction Impacts**

177. **Utilities.** Telephone lines, electric poles and wires, water lines within the designed project locations may require to be shifted in few cases. To mitigate the adverse impacts due to relocation of the utilities, the contractor, in collaboration with ULB will

---

<sup>18</sup> ADB SPS specifies application of pollution prevention and control technologies and practices consistent with international good practice, as reflected in internationally recognized standards such as the World Bank Group's *Environment, Health and Safety (EHS) Guidelines*. These standards contain performance levels and measures that are normally acceptable and applicable to projects. When host country regulations differ from these levels and measures, the borrower/client will achieve whichever is more stringent. If less stringent levels or measures are appropriate in view of specific project circumstances, the borrower/client will provide full and detailed justification for any proposed alternatives that are consistent with the requirements presented in this document.

<sup>19</sup>The EHS Guidelines specify that the use of ACM should be avoided in new buildings and construction or as a new material in remodeling or renovation activities. Existing facilities with ACM should develop an asbestos management plan that clearly identifies the locations where the ACM is present, its condition (e.g., whether it is in friable form or has the potential to release fibers), procedures for monitoring its condition, procedures to access the locations where ACM is present to avoid damage, and training of staff who can potentially come into contact with the material to avoid damage and prevent exposure. The plan should be made available to all persons involved in operations and maintenance activities. Repair or removal and disposal of existing ACM in buildings should be performed only by specially trained personnel following host country requirements or, if the country does not have its own requirements, internationally recognized procedures. Decommissioning sites may also pose a risk of exposure to asbestos that should be prevented by using specially trained personnel to identify and carefully remove asbestos insulation and structural building elements before dismantling or demolition.

- identify the locations and operators of these utilities to prevent unnecessary disruption of services during construction phase; and
- instruct construction contractors to prepare a contingency plan to include actions to be done in case of unintentional interruption of services

178. Site selection of construction work camps, stockpile areas, storage areas, and disposal areas. Priority is to locate these near the project location. However, if it is deemed necessary to locate elsewhere, sites to be considered will not promote instability and result in destruction of property, vegetation, irrigation, and drinking water supply systems. Residential areas will not be considered for setting up construction camps to protect the human environment (i.e. to curb accident risks, health risks due to air and water pollution and dust and noise and to prevent social conflicts, shortages of amenities and crime). Extreme care will be taken to avoid disposals near forest areas, water bodies, swamps or in areas which will inconvenience the community. Construction sites will be selected by DBO contractor in compliance with these conditions and the same will be reflected in Site Environmental Management Plan (SEMP) which is to be prepared by DBO contractor prior to start of construction and approved by PIU. Material stockpiles will be protected by bunds during the monsoon season to prevent silt runoff into drains. The subproject is likely to generate soil from excavations, which needs to be disposed of safely. The following measures should be considered for disposal of surplus and/or waste soil:

- (i) The excavated soil should be removed from construction area at the earliest for beneficial reuse such as land raising / filling of excavated areas;
- (ii) Soil should be covered with tarpaulin sheets during the transportation; and
- (iii) Soil transportation should not be done during the peak hours and should avoid narrow and heavy traffic routes and important religious or tourist sites.

179. **Site selection of sources of materials.** Extraction of materials can disrupt natural land contours and vegetation resulting in accelerated erosion, disturbance in natural drainage patterns, ponding and water logging, and water pollution. To mitigate the potential environmental impacts, locations of quarry site/s and borrow pit/s (for loose material other than stones) would be assessed by PIU. Priority would be sites already permitted by Mines and Geology Department. If new sites are necessary, these would be located away from population centers, drinking water intakes and streams, cultivable lands, and natural drainage systems; and in structurally stable areas. It will be the construction contractor's responsibility to verify the suitability of all material sources and to obtain the approval of Department of Mines and Geology and local revenue administration. If additional quarries will be required after construction is started, then the construction contractor shall use the mentioned criteria to select new quarry sites, with written approval of PIU.

## **E. Construction Impacts**

180. The civil works for the subproject includes construction of STPs, SPSs and CWRs. These works will be confined to sites, and construction will include general activities like site clearance, excavation for foundations, and creation of concrete structures will be one of the major construction activities for this project. Most such structures will be constructed from reinforced concrete (RC), where steel reinforcing rods and bars are placed and attached by hand to create an interior skeleton for the foundations, walls, columns, plinths, etc., and heavy-duty metal and timber/plywood formwork is bolted around the outside to build a mould into which pre-mixed concrete is poured. Once the concrete has set, the formwork is removed, and

the concrete surface is finished by masons by hand if necessary. Some buildings, such as the pump station, facilities, etc., may be constructed from brick work, in which case this work will be done using standard house-building techniques. Some components of the STP may comprise a variety of prefabricated elements which will be installed on site as ready-made individual units. These will be directly brought from the manufacturers place to the sites lifted into position by crane, affixed to plinths or other installation points, and connected up to pipework and the electricity supply. Since, these works are confined to the boundary of identified sites, there is no direct or significant interference of construction work with the surrounding land use. However, construction dust, noise, use of local roads for transportation of construction material, waste, labour camps etc., will have negative impacts, which needs to be avoided or mitigated properly.

181. Subproject also include linear works (laying of 194 km of water pipes, and 68 km of sewers along the roads). This covers almost entire project area of town. Distribution lines / small sewers (tertiary sewers) will be laid in all streets and roads, the larger sewers and water mains will be laid mostly on wider main roads. Pipes / sewers will be laid by open cut method. Water pipes will be laid in the ground without a maximum cover of 1 m, so that depth of excavation will be up to 1.5-1.8 m. The maximum depth for sewers depends on the design, and in Sardarshahar most of the sewers will be laid 1.2 to 2 m below the ground, and some sewers will be laid deeper (>2m) and maximum depth will be 8 m. As per the bid conditions, sewers of more than 3.5 m deep should not be laid by open cutting method. As per the bid conditions, "the maximum depth of sewer is 3.5 m for open excavation after 3.5 m sewer shall be laid by the trenchless method only. Trenchless method may also be used even where depth is less than 3.5 m for important roads in the city where traffic density is more, and in the streets where traffic diversion is not feasible etc. It is designed that 12 km length of sewers will be laid by trenchless method; these will include highway /main road crossings. Sufficient care will be taken while laying so that existing utilities and cables are not damaged and pipes are not thrown into the trenches or dragged, but carefully laid in the trenches. Trenches deeper than 1.5 m will be protected by shoring/bracings to avoid collapse of trenches, and also to avoid any risk to surrounding buildings. Once they are laid, pipes will be joined as per specification and then tested for any cracks or leakages. The minimum working hours will be 8 hours daily, the total duration of each stage depends on the soil condition and other local features. Extraneous soil after backfilling of trenches shall be used for filling low lying area or stored/ dumped in approved debris disposal sites.

182. Although construction of these project components involves quite simple techniques of civil work, the invasive nature of excavation and the project locations in the built-up areas of the town where there are a variety of human activities, will result in impacts to the environment and sensitive receptors such as schools, religious places, hospitals and the community in general. Although these anticipated impacts are temporary and for short duration, require proper mitigation measures to limit the impacts to acceptable levels. Physical impacts will be reduced by the method of working and scheduling of work. Likely impacts of construction phase, and appropriate mitigation measures are discussed below:

183. **Sources of Materials.** Significant amount of gravel, sand, coarse aggregate, and cement will be required for this project. The construction contractor will be required to:

- Use material sources permitted by government only;
- Verify suitability of all material sources and obtain approval of PIU; and
- Submit to PIU on a monthly basis documentation of sources of materials. If contractor is purchasing ready mix concrete, asphalt/macadam and aggregates from third party, contractor will assure that all the parties/ suppliers are having CTE/CTO from RSPCB and



will collect the copy of these certificates and submit to PIU/consultants.

184. **Air Quality.** Emissions from construction vehicles, equipment, and machinery used for excavation and construction will induce impacts on the air quality in the construction sites. Anticipated impacts include dusts and increase in concentration of vehicle-related pollutants such as carbon monoxide, sulfur oxides, particulate matter, nitrous oxides, and hydrocarbons. These however will be temporary limiting to construction activities only. To mitigate the impacts, construction contractors will be required to:

- (i) Plan the work sites properly, and demarcate the sites for stockpiling of, soils, gravel, and other construction materials away from the traffic, vehicle, general worker movement to avoid disturbance of loose materials;
- (ii) Damp down exposed soil and any stockpiled material on site by water sprinkling;
- (iii) Use tarpaulins to cover sand and other loose material when transported by trucks;
- (iv) Clean wheels and undercarriage of haul trucks prior to leaving construction site;
- (v) Don't allow access in the work area except workers to limit soil disturbance and prevent access by barricading and security personnel;
- (vi) Fit all heavy equipment and machinery with air pollution control devices which are operating correctly. contractor's vehicles and equipment should compulsorily have PUC and submit PUC to PIU before deployment at site;
- (vii) Obtain, CTE and CTO for batching plant, hot mix plant, crushers etc. if specifically established for this project;
- (viii) If contractor is purchasing ready mix concrete, asphalt/macadam and aggregates from third party, contractor will assure that all the parties/ suppliers are having CTE/CTO from RSPCB and will collect the copy of these certificates and submit to PIU/consultants; PIU will approve the source only after all the certificates are submitted; and
- (ix) Conduct ambient air quality monitoring periodically as per Environmental Management Plan (EMP).

185. **Surface Water Quality.** Works during rains. Run-off from stockpiled materials, and chemical contamination from fuels and lubricants during construction works can contaminate downstream surface water quality of the streams. These potential impacts are temporary and short-term duration only. However, to ensure that these are mitigated, construction contractor will be required to:

- (i) Prepare and implement a spoils management plan (Appendix 21);
- (ii) Avoid stockpiling of earth fill especially during the monsoon season unless covered by tarpaulins or plastic sheets;
- (iii) Prioritize re-use of excess spoils and materials in the construction works. If spoils will be disposed, consult with PIU on designated disposal areas;
- (iv) Inspect all the drainage at construction site/construction camp/labor camp etc. and clear all the drainage lines so that no water stagnation/flooding may occur during heavy rainfall
- (v) As for a possible avoid trench works and excavation works (pipe laying) during monsoon season to avoid any water logging and accident due to it
- (vi) If open trenches are not avoidable during monsoon, keep ready all the mitigations measures to avoid water logging such as dewatering pumps and sufficient pipes, traffic assistance, barricades etc.

- (vii) Inspect and verify all the emergency measures and emergency control system before start of monsoon, keep the emergency response committee on high alert during monsoon/heavy rain fall
- (viii) Install temporary silt traps or sedimentation basins along the drainage leading to the water bodies;
- (ix) Place storage areas for fuels and lubricants away from any drainage leading to water bodies;
- (x) Dispose any wastes generated by construction activities in designated sites; and
- (xi) Conduct surface quality inspection according to the Environmental Management Plan (EMP).

186. **Noise and Vibration Levels.** Construction works will be conducted along the roads in Sardarshahar urban area, where there are houses, schools and hospitals, religious places and small-scale businesses. Increase in noise level may be caused by excavation, particularly breaking of cement concrete or bitumen roads, operation of construction equipment like concrete mixers, and the transportation of equipment, materials, and people. Vibration generated from construction activity, for instance from the use of pneumatic drills, will have impact on nearby buildings. This impact is negative but short-term, and reversible by mitigation measures. The construction contractor will be required to:

- (i) Plan activities in consultation with PIU so that activities with the greatest potential to generate noise are conducted during periods of the day which will result in least disturbance;
- (ii) Horns should not be used unless it is necessary to warn other road users or animals of the vehicle's approach;
- (iii) As far as possible use new construction machineries and keep all the old machineries in good and maintained state;
- (iv) Minimize noise from construction equipment by using vehicle silencers, fitting jackhammers with noise-reducing mufflers, and use portable street barriers to minimize sound impact to surrounding sensitive receptor;
- (v) Maintain maximum sound levels not exceeding 80 decibels (dBA) when measured at a distance of 10 m or more from the vehicle/s;
- (vi) Identify any buildings at risk from vibration damage and avoiding any use of pneumatic drills or heavy vehicles in the vicinity;
- (vii) Consult the custodians of important buildings, cultural and tourism authorities and local communities in advance of the work to identify and address key issues, and avoid working at sensitive times, such as religious and cultural festivals;
- (viii) Conduct Noise monitoring according to the Environmental Management Plan (EMP).

187. **Landscape and Aesthetics.** Some trees will be required to cut due to which landscape and aesthetics of those sites will be reduced. The construction works will produce excess excavated earth, excess construction materials, and solid waste such as removed concrete, wood, packaging materials, empty containers, spoils, oils, lubricants, and other similar items. Haphazard disposal of these will have negative impacts on landscape and overall aesthetics. These impacts are negative but are of short-term and reversible by mitigation measures. The construction contractor will be required to:

- (i) Take all the efforts to reduce numbers of tree cutting by amending design;
- (ii) Compensatory plantation in the ratio of 1:3 is required to increase landscape and aesthetics of the sites where tree cutting has been done;

- (iii) Prepare and implement spoils management plan;
- (iv) Avoid stockpiling of excess excavated soils;
- (v) Coordinate with ULB for beneficial uses of excess excavated soils or immediately dispose to designated areas;
- (vi) Recover used oil and lubricants and reuse or remove from the sites;
- (vii) Manage solid waste according to the following preference hierarchy: reuse, recycling and disposal to designated areas;
- (viii) Remove all wreckage, rubbish, or temporary structures which are no longer required; and
- (ix) Request PIU to report in writing that the necessary environmental restoration work has been adequately performed before acceptance of work.

188. **Groundwater Quality.** Another physical impact that is often associated with excavation is the effect on drainage and the local water table if groundwater collects in the voids. In Sardarshahar groundwater is much deeper than the designed trenching depth, and rains are limited during monsoon season. However, to ensure that water will not pond in pits and voids near project location, the construction contractor will be required to conduct excavation works in non-monsoon season to the maximum extent possible. These potential impacts are temporary and short-term duration only. However, to ensure that these are mitigated, construction contractor will be required to:

- (i) Prepare and implement a spoils management plan (Appendix 21);
- (ii) Avoid stockpiling of earth fill especially during the monsoon season unless covered by tarpaulins or plastic sheets;
- (iii) Prioritize re-use of excess spoils and materials in the construction works. If spoils will be disposed, consult with PIU on designated disposal areas;
- (iv) Install temporary silt traps or sedimentation basins along the drainage leading to the water bodies;
- (v) Place storage areas for fuels and lubricants away from any drainage leading to water bodies;
- (vi) Dispose any wastes generated by construction activities in designated sites; and
- (vii) Conduct surface quality inspection according to the Environmental Management Plan (EMP).

189. **Accessibility.** Excavation along the roads, hauling of construction materials and operation of equipment on-site can cause traffic problems. Potential impact is negative but short term and reversible by mitigation measures. The construction contractor will be required to:

- (i) Prepare and implement a Traffic Management Plan (Appendix 22);
- (ii) Plan transportation routes so that heavy vehicles do not use narrow local roads, except in the immediate vicinity of delivery sites;
- (iii) Schedule transport and hauling activities during non-peak hours;
- (iv) Locate entry and exit points in areas where there is low potential for traffic congestion;
- (v) Keep the site free from all unnecessary obstructions;
- (vi) Drive vehicles in a considerate manner;
- (vii) Coordinate with Traffic Police for temporary road diversions and for provision of traffic aids if transportation activities cannot be avoided during peak hours; and
- (viii) Notify affected sensitive receptors by providing sign boards informing nature and duration of construction works and contact numbers for concerns/complaints.

190. Wherever road width is very narrow, there will be temporary loss of access to pedestrians and vehicular traffic (including 2-wheelers) during the laying of pipes. Under those circumstances, contractor shall adopt following measures:

- (i) Inform the affected local population 1-week in advance about the work schedule;
- (ii) Plan and execute the work in such a way that the period of disturbance/ loss of access is minimum; and
- (iii) Provide pedestrian access in all the locations until normalcy is restored. Provide wooden/metal planks over the open trenches at each house to maintain the access.

191. **Traffic diversion and/or road closure.** Laying of water and sewer lines simultaneously may significantly impact the traffic movement. This should be avoided as far as possible by proper planning of construction works. If traffic diversion and/or road closure is required for the designed works, prior consent from traffic department will be required and prior information to affected areas and public should be disseminated through consultations by CAPPCC. Proper road signage and traffic aids should be provided at site. Excavation along the roads, hauling of construction materials and operation of equipment on-site can cause traffic problems. As the trenchless method adopted for sewers of more than 3.5 m deep avoiding open cut excavation, this will avoid large scale disturbances in the busy roads. Potential impact is negative but short term and reversible by mitigation measures. The construction contractor will be required to:

- (i) Plan water and sewer line works to minimize traffic disturbance / blockades; as the both water and sewer lines are to be laid in all the roads and streets in the town, work planning is crucial to minimize the inconvenience to public due to repeated excavations;
- (ii) Prepare and implement a Traffic Management Plan (Appendix 22);
- (iii) Duly consider and select sections for trenchless method of pipelaying based on traffic conditions;
- (iv) Locate entry and exit points in areas where there is low potential for traffic congestion;
- (v) Keep the site free from all unnecessary obstructions;
- (vi) Coordinate with Traffic Police for temporary road diversions and for provision of traffic aids if transportation activities cannot be avoided during peak hours;
- (vii) Notify affected sensitive receptors by providing sign boards informing nature and duration of construction works and contact numbers for concerns/complaints; and
- (viii) Maintain sufficient access to houses and shopkeepers (commercial establishments) during pipe/sewer laying work through metal sheets and temporary bridges.

192. **Socio-Economic – Income.** The project components will be located in government land and there is no requirement for land acquisition or any resettlement. Construction works will impede the access of residents to specific site in limited cases. The potential impacts are negative and moderate but short-term and temporary. The construction contractor will be required to:

- (i) Prepare and implement spoils management plan (Appendix 21);
- (ii) Leave spaces for access between mounds of soil;
- (iii) Provide walkways and metal sheets where required to maintain access across for people and vehicles;

- (iv) Increase workforce in the areas with predominantly institutions, place of worship, business establishment, hospitals, and schools;
- (v) Consult businesses and institutions regarding operating hours and factoring this in work schedules;
- (vi) Provide sign boards for pedestrians to inform nature and duration of construction works and contact numbers for concerns/complaints;
- (vii) Notify community/ water users in advance about likely interruptions in water supply; and
- (viii) Provide alternate sources of clean water until water supply is restored.

193. **Socio-Economic – Employment.** Manpower will be required during the 36-months construction stage. This can result in generation of temporary employment and increase in local revenue. Thus, potential impact is positive and long-term. The construction contractor will be required to employ local labour force, to the maximum extent, possible.

194. **Occupational Health and Safety.** Workers need to be mindful of the occupational hazards which can arise from working in height and excavation works. Potential impacts are negative and long-term but reversible by mitigation measures. The construction contractor will be required to:

- (i) Comply with all national, state and local labor laws (see Appendix 8);
- (ii) Following best practice health and safety guidelines: IFC's General EHS Guidelines<sup>20</sup>, WHO Interim Guidance (and its updates) on Water, Sanitation, Hygiene and Waste management for the COVID19 virus (Appendix 37), and Sector Specific (Water and Sanitation) Guidelines<sup>21</sup>;
- (iii) Develop and implement site-specific occupational health and safety (OH andS) Plan which will include measures such as: (a) excluding public from the site; (b) ensuring all workers are provided with and use personal protective equipment; (c) OH andS Training<sup>22</sup> for all site personnel; (d) documented procedures to be followed for all site activities; and (e) documentation of work-related accidents;
- (iv) Conduct work in confine spaces, trenches, and at height with suitable precautions and using standards and safe construction methods; do not adopt adhoc methods; all trenches deeper than 1.5 m shall be provided with safety shoring/braces; and avoid open cutting method for trenches deeper than 3.5 m by adopting trenchless technology;
- (v) Ensure that qualified first aid is always provided. Equipped first-aid stations shall be easily accessible throughout the site;
- (vi) Provide medical insurance coverage for workers;

<sup>20</sup><https://www.ifc.org/wps/wcm/connect/554e8d80488658e4b76af76a6515bb18/Final%2B-%2BGeneral%2BEHS%2BGuidelines.pdf?MOD=AJPERES>

<sup>21</sup><https://www.ifc.org/wps/wcm/connect/e22c050048855ae0875cd76a6515bb18/Final%2B-%2BWater%2Band%2BSanitation.pdf?MOD=AJPERES>

<sup>22</sup> Some of the key areas that may be covered during training as they relate to the primary causes of accidents include (i) slips, trips and falls; (ii) personal protective equipment; (iii) ergonomics, repetitive motion, and manual handling; (iv) workplace transport; and (v) legislation and responsibilities. Training can provide the foundations of competence but it does not necessarily result in a competent worker. Therefore, it is essential to assess staff competence to ensure that the training provided is relevant and effective. Supervision and monitoring arrangements shall be in place to ensure that training has been effective and the worker is competent at their job. The level of supervision and monitoring required is a management decision that shall be based on the risks associated with the job, the level of competence required, the experience of the individual and whether the worker works as part of a team or is a lone worker.

- (vii) Secure all installations from unauthorized intrusion and accident risks;
- (viii) The project area experiences extreme temperature during summer months of April and May, which may affect the health of workers engaged in construction work. Contractor should take necessary measures during summers including the following:
  - (ix) Work schedule should be adjusted to avoid peak temperature hours (12 – 3 PM)
  - (x) Provide appropriate shade near the workplace; allow periodic resting and provide adequate water;
  - (xi) Provide necessary medicine and facilities to take care of dehydration related health issues;
  - (xii) Provide supplies of potable drinking water;
  - (xiii) Provide clean eating areas where workers are not exposed to hazardous or noxious substances;
  - (xiv) Provide H andS orientation training to all new workers to ensure that they are apprised of the basic site rules of work at the site, personal protective protection, and preventing injuring to fellow workers;
  - (xv) Provide visitor orientation if visitors to the site can gain access to areas where hazardous conditions or substances may be present. Ensure also that visitor/s do not enter hazard areas unescorted;
  - (xvi) Ensure the visibility of workers through their use of high visibility vests when working in or walking through heavy equipment operating areas;
  - (xvii) Ensure moving equipment is outfitted with audible back-up alarms;
  - (xviii) Mark and provide sign boards for hazardous areas such as energized electrical devices and lines, service rooms housing high voltage equipment, and areas for storage and disposal. Signage shall be in accordance with international standards and be well known to, and easily understood by workers, visitors, and the general public as appropriate;
  - (xix) Disallow worker exposure to noise level greater than 85 dBA for a duration of more than 8 hours per day without hearing protection. The use of hearing protection shall be enforced actively;
  - (xx) Conduct regular health check-ups for workers;
  - (xxi) Provide periodical awareness camps and special trainings for workers for health issues and risks in construction sites; and
  - (xxii) During working in Dam area, workers should be made aware of risks of water depth and dangerous areas of water should be properly marked by fix or floating barricades and signage of danger. Workers should also be made aware for protection of biodiversity of the water and fishing should be strictly prohibited. A boat should be made available at site for transport of labour and materials and should be well maintained for any emergency condition. Workers should not be allowed to dip or bath in water of dam. Suitable working platform should be provided during construction works in water.

195. **Asbestos Materials.** No Asbestos containing material (ACM) is designed to be used in the subproject construction. There are however ACM in the existing water supply infrastructure, which may be disturbed or come in contact with the workers and general public and may have serious health implications. This is already discussed in under the existing facilities audit, and necessary measures are suggested. A small area in PHED campus will used as temporary storage area for storage of AC pipes encountered during construction before its scientific disposal, layout of same is provided in appendix 35 During construction.

196. **Community Health and Safety.** Hazards posed to the public, specifically in high-



pedestrian areas may include traffic accidents and vehicle collision with pedestrians. Potential impact is negative but short-term and reversible by mitigation measures. The construction contractor will be required to:

- (i) Plan routes to avoid times of peak-pedestrian activities;
- (ii) Liaise with PIU in identifying risk areas on route cards/maps;
- (iii) Maintain regularly the vehicles and use of manufacturer-approved parts to minimize potentially serious accidents caused by equipment malfunction or premature failure; and
- (iv) Provide road signs and flag persons to warn of on-going trenching activities.

197. Central part of the town is characterized by narrow roads. Particularly, the areas located on slopes have very narrow roads with sharp turns and are accessible only to pedestrians. Besides impeding the access, the trench excavation and pipe laying will pose safety risks to pedestrians and the people living in these areas. The construction contractor will be required to:

- (i) Trench excavation and pipeline works shall be conducted in a safe manner; if the allowing public movement along the work sites (pedestrians or vehicles as the case may be) is likely to cause safety risks, movement should be blocked temporarily and work shall be conducted; in such areas, conducting night work or working in small stretches to avoid blockage of traffic/movement no more than few hours in due consultation with the local community and ULB shall be planned;
- (ii) All trenches deeper than 1.5 m shall be provided with safety shoring/braces; and avoid open cutting method for trenches deeper than 3.5 m by adopting trenchless technology;
- (iii) Survey the surrounding vulnerable buildings for likely issues in structural stability / differential settlement during the excavation works;
- (iv) Provide prior information to the local people about the nature and duration of work;
- (v) Conduct awareness program on safety during the construction work;
- (vi) Undertake the construction work stretch-wise; excavation, pipe laying and trench refilling should be completed on the same day; and
- (vii) Provide hard barricades, and deploy security personnel to ensure safe movement of people and also to prevent unnecessary entry and to avoid accidental fall into open trenches.

198. **Establishment and Operation of Construction Camps and Workers Facilities.** It is likely that the contract may employ workers from outside project area, and therefore may provide temporary workers accommodation during the construction phase. Proper provision and maintenance of facilities is necessary for proper living conditions and avoid health, environment and safety issues. Workers camps may also have adverse impacts on surrounding communities. Operation of construction camps can cause temporary air and noise pollution from machine operation, water pollution from storage and use of fuels, oils, solvents, and lubricants. Potential impacts are negative but short-term and reversible by mitigation measures. The construction contractor will be required to:

- (i) Consult PIU before locating project offices, sheds, and construction plants;
- (ii) Minimize removal of vegetation and disallow cutting of trees;

- (iii) Provide drinking water, water for other uses, and sanitation facilities for employees;
- (iv) Provided temporary rest and eating area at all work sites;
- (v) Ensure conditions of liveability at work camps are maintained at the highest standards possible at all times; living quarters and construction camps shall be provided with standard materials (as far as possible to use portable ready to fit-in reusable cabins with proper ventilation); thatched huts, and facilities constructed with materials like GI sheets, tarpaulins, etc., shall not be used as accommodation for workers; accommodation shall meet the IFC standards for workers accommodation<sup>23</sup> which include: provision of safe housing, availability of electricity, plumbing, water and sanitation, adequate fire protection and dormitory/room facilities; accommodation shall be in the range from 10 to 12.5 cubic meters (volume) or 4 to 5.5 square meters (surface) per worker, a minimum ceiling height of 2.10 meters; a reasonable number of workers are allowed to share the same room – (standards range from 2 to 8 workers); workers with accompanying families shall be provided with a proper and safe accommodation (IFC benchmark standards for workers accommodation is provided in Appendix 23)Prohibit employees from poaching wildlife and cutting of trees for firewood;
- (vi) Train employees in the storage and handling of materials which can potentially cause soil contamination;
- (vii) Recover used oil and lubricants and reuse or remove from the site;
- (viii) Manage solid waste according to the following preference hierarchy: reuse, recycling and disposal to designated areas;
- (ix) Remove all wreckage, rubbish, or temporary structures which are no longer required; and
- (x) Report in writing that the camp has been vacated and restored to pre-project conditions before acceptance of work.

199. **Social and Cultural Resources.** For this project, excavation will occur at locations known not to have archaeological values, so it could be that there is a low risk of such impacts. Nevertheless, the construction contractor will be required to:

- (i) Follow the protocol for chance finds in any excavation work;
- (ii) Create awareness among the workers, supervisors and engineers about the chance finds during excavation work;
- (iii) Stop work immediately to allow further investigation if any finds are suspected;
- (iv) Inform local Archaeological Department / Museum office if a find is suspected; and
- (v) take any action they require ensuring its removal or protection in situ.

200. **Debris disposal.** Prior to the commencement of works, contractor shall identify a debris disposal site in consultation with the PIU and Consultant Contractor will follow all the prescribed rules during construction and adhering to following criteria:(including but not limited to)

- (i) The site shall be selected preferably from barren, infertile lands. In case agricultural land needs to be selected, top-soil stripping, stacking and preservation should be undertaken prior to initiation of any activities;

<sup>23</sup>

[https://www.ifc.org/wps/wcm/connect/topics\\_ext\\_content/ifc\\_external\\_corporate\\_site/sustainability-at-ifc/publications/publications\\_gpn\\_workersaccommodation](https://www.ifc.org/wps/wcm/connect/topics_ext_content/ifc_external_corporate_site/sustainability-at-ifc/publications/publications_gpn_workersaccommodation)

- (ii) Debris disposal site shall be at least 200 m away from surface water bodies;<sup>24</sup>
- (iii) No residential areas shall be located within 100 m downwind side of the site;
- (iv) The site is minimum 250 m. away from sensitive locations like hospitals, religious places, ponds/lakes or other water bodies; and
- (v) The local governing body and community shall be consulted while selecting the site.

**201. Night works.** Most of the construction works shall be undertaken only during day hours. Night works are required only in the extreme conditions such as road having heavy traffic in daytime and/or no alternate access can be provided for the road users, extreme climatic conditions (extreme hot during summers), religious fairs/celebrations in daytime etc. Contractors are required to take prior approval from PIU/Consultants and concerned town authorities for night works. Contractors are required to adhere following conditions for night works including those prescribed by concerned authorities:

- (i) Prepare a night work protocol and obtain prior approval from PIU, and strictly implement and report on implementation of protocol during the workers;
- (ii) Contractors should have handheld noise level meter for measurement of noise during night hours;
- (iii) Contractors should have handheld lux meter for the measurement of illumination during night hours;
- (iv) Preferably electrical connections are available for running equipment otherwise soundproof/super silent Diesel Generator set should be available;
- (v) Sound level should not increase as prescribe by CPCB; and
- (vi) Illumination should be as follows:

| Minimum illumination (lx) | Areas to be illuminated                                   | Type of work activity                                                                                                  |
|---------------------------|-----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| 54                        | Illumination throughout the work area                     | General work area lighting, and performance of visual tasks of large size, or medium contrast, or low require accuracy |
| 108                       | Illumination of work area and areas adjacent to equipment | Performance of visual tasks of medium size, or low to medium contrast, or medium required accuracy                     |
| 216                       | Illumination of task                                      | Performance of visual tasks of small size, or low contrast or high required accuracy or fine finish                    |

- (i) As far as possible ready-mix concrete from batching plant to be used, otherwise the concrete should be prepared away from residential areas and brought to the site;
- (ii) All the noisy activities like hammering, cutting, crushing, running of heavy equipment should be done in daytime and avoided in nighttime;
- (iii) Workers engaged in night works should have adequate rest/sleep in daytime before start of night works;

---

<sup>24</sup> In the absence of site meeting the stipulated criteria, an alternate site can be selected specifying the reasons. In such a case, the construction camp management plan should incorporate additional measures specific to the site as suggested by the Construction Manager.

- (iv) Worker engaged for night works should have previous experience of night works and should be physically fit for such works including clear vision in night;
- (v) All the necessary provisions of traffic aids such as traffic signals, road signage, barricades, cautions boards, traffic diversion boards etc. should be available with fluorescent/retro-reflective arrangements;
- (vi) Workers should be trained before start of night works about risks and hazards of night works and their mitigation measures and should be provided all the protective aids (PPEs) including fluorescent/retro-reflective vests;
- (vii) Horns should not be permitted by equipment and vehicles
- (viii) Workers should not shout and create noise;
- (ix) First aid and emergency vehicles should be available at site;
- (x) Emergency preparedness plan should be operative during night works;
- (xi) Old persons and pregnant women and women having small kids should not work in nighttime;
- (xii) All the vehicles and equipment being used at night works should have adequate type of silencers/enclosures/mufflers to reduce noise;
- (xiii) All the vehicles should be checked for working head lamps, tail lamps, inner lights etc. before start of night works;
- (xiv) PIU/DSC site engineers and contractor's safety personnel should closely monitor the safety of works continuously and noise and illumination levels on hourly basis and maintain photographic and video graphic records as well as register the observations;
- (xv) Night works should be stopped early in the morning at least one hour before start of pedestrian/traffic movement;
- (xvi) After completion of night works all the site should be cleaned and maintained obstruction free for daytime movement of vehicles and pedestrians;
- (xvii) Drivers and workers should be alert and responsive during night works;
- (xviii) All the wages to workers working in night hours should be as per the applicable labour acts;
- (xix) Avoid any nuisance which may create problems to nearby habitants and work peacefully during night hours;
- (xx) Night works should not be conducted near hospitals and during peak seasons such as peak tourist season, students' exam times etc.

## **F. Operation and Maintenance Impacts**

202. **Water Supply System.** Operation and Maintenance of the water supply system will be carried out by DBO contractor for 10 years and then Sardarshahar Municipality directly or through an external operator. The water supply system is intended to deliver potable water meeting drinking water standards (Appendix 2) to the consumers at their homes. This must be ensured.

203. The system has a design life of 30 years, during which shall not require major repairs or refurbishments and should operate with little maintenance beyond routine actions required to keep the equipment in working order. The stability and integrity of the system will be monitored periodically to detect any problems and allow remedial action if required. Any repairs will be small-scale involving manual, temporary, and short-term works involving regular checking and recording of performance for signs of deterioration, servicing and replacement of parts.

204. Recurrence of pipe bursting and leakage problems in water supply system will be managed by the leak detection and water auditing surveys. The operating agency will be required to ensure that the leak detection and rectification time is minimized.

205. Water treatment and disinfection in the CWRs is one of the main operation activities of the water supply system. This activity produces wastewater, solid waste, and poses safety risk due to handling of chlorine.

206. During the operation phase, it is necessary that the facility is operated by trained staff as per the standard operating procedures.

- (i) Chlorinator facility is operated only by trained staff and as per the standard operating procedures;
- (ii) In case of any accident and/or maintenance activity, the staff should follow documented procedures only; and
- (iii) It is suggested to develop an Emergency Response System (ERS) for the chlorine leakage.

207. Following measures are suggested for implementation / compliance during the operation phase:

- (i) Judiciously utilize the available water in canal and groundwater resources by adapting conjunctive use; prepare a water utilization plan every year post monsoon season depending on the water availability;
- (ii) Ensure that water supplied to the consumers at all times meet the drinking water standards; carry out regular sampling and testing, and disseminative information;
- (iii) Ensure zero wastewater discharge from the water treatment process via collection and recirculation of process wastewater / backwash water;
- (iv) Implement sludge management plan; ensure collection, processing, drying, and safe disposal / reuse accordingly;
- (v) Assess composition and characteristics of sludge from the first batch operation at the initial phases, and confirm the handling, management and disposal/reuse actions suggested in the management plan;
- (vi) Conduct periodic testing of sludge as per the environmental monitoring plan;
- (vii) Ensure valid consent to operate (CTO) from RSPCB for operation of STP;
- (viii) Ensure that all conditions/standards prescribed by RSPCB are complied duly;
- (ix) Ensure that chlorinator facility is operated only by trained staff and as per the standard operating procedures; in case of any accident and/or maintenance activity, ensure that the staff follows documented procedures only; and
- (x) Implement Emergency Response System (ERS) for the chlorine leakage; Guidelines and Emergency plan for handling and storing chlorine is attached as Appendix 24.

208. **Sewerage System.** O&M of the sewerage system will be carried out by DBO contractor for 10 years and then by Sardarshahar Municipality directly or through an external operator. The sewerage system is intended to collect, convey, treat and dispose the sewage from the town areas safely. Operation will involve collection and conveyance of wastewater from houses to STP; treatment of sewage at STP to meet the disposal standards; and final disposal of treated wastewater, and treatment and disposal of sludge.

209. Treated wastewater is designed to be utilized in reuse applications following the Sewerage and Wastewater Policy 2016 of Rajasthan, and accordingly Reuse Plan will be

prepared by the DBO contractor during the detailed design phase. As stated previously, subproject will be implemented under design-build-operate (DBO), and the successful bidder / DBO contractor will carry out detailed designs, therefore at present the subproject is designed in outline only. The treated wastewater if utilized for reuse purposes as per the Reuse Plan there will be no negative impacts, and in fact it will enhance environmental benefits in the form of water savings. Various measures to safeguard environment and health environment in utilizing the treated wastewater, including required quality for various process will be established in the reuse plan and will be implemented accordingly. All necessary safety, mitigation and monitoring measures as suggested in the reuse plan shall be implemented. The excess / surplus / unused wastewater, if any, will be discharged into local drains/streams. These run dry except during monsoon. It carries untreated wastewater from habitations along its course. Considering the existing status of streams, and the degree of treatment designed, no significant impacts envisaged. However, any change / lowering of treatment efficiency during operation may lead to poor quality of wastewater and affect the reuse. Mixing of industrial effluents in sewers may affect the inlet quality of sewage. It is therefore critical that STP receives the sewage with intended quality and treats the same to design discharge standards.

210. STP operational procedures will be firmed up during the detailed design phase, including the amount of automated or manual operation. It must be ensured that the facility is operated with standard operating procedures and only by trained staff. Ensuring uninterrupted power supply with back-up facility is a must. Standard operating procedures and operation manual will be prepared by the DBO contractor. Besides routine operation, this should cover all necessary items such as preventive maintenance, periodic maintenance and emergency maintenance, replacement of pumps, motors, and other electro-mechanical parts as per the design life to optimize energy use and system efficiency etc., Adequate resources – technical and financial, has been taken into consideration in the project design. Manual will also include safety awareness and mock drills for worker safety.

211. Subproject includes sludge management infrastructure in STP, including system for sludge collection, thickening, solar drying, and disposal at landfill/identified site. This includes a Sludge Sump to collect sludge from SBR basins; returning arrangement for supernatant from the sump to inlet/equalization tank for treatment; pumping sludge to sludge thickener and pumping thickened to mechanical sludge dewatering system (such as centrifuge). It also requires contractor to establish a shed where the dewatered sludge cake can be further air dried for 15 days. This is indicative sludge management system, and DBO contractor will design the system meeting these requirements and prepare sludge management plan. Bid indicates that “the sludge produced from the treatment process would be processed so it may be used as fertilizer and soil conditioner” and it requires DBO contractor “to conform to the regulations of public health and environment protection norms”. The norms for safe use of processed sludge as fertilizer and soil conditioner are already discussed in this IEE. This follows the Sewerage and Wastewater Policy, 2016, which suggests “use of sludge produced from the treatment as fertilizer and soil conditioner after processing”. A sludge disposal site will be identified during the detailed design phase to dispose unutilized dried sludge in reuse applications. The updated IEE will include the details of disposal site. If the sludge is managed accordingly, there will no impacts.

212. During the operation phase, it is necessary that the facility is operated by trained staff as per the standard operating procedures. Following measures are suggested for implementation / compliance during the operation phase:



- (i) Ensure that treated wastewater meets the established discharge standards all times; Conduct regular wastewater quality monitoring (at inlet and at outlet of STP) to ensure that the treated effluent quality complies with design standards;
- (ii) Ensure implementation of Reuse Plan, and ensure intended quality for each direct reuse;
- (iii) Assess composition and characteristics of sludge from the first batch operation at the initial phases, and confirm the handling, management and disposal/reuse actions suggested in the management plan;
- (iv) Conduct periodic testing of dried sludge/compost to check presence of heavy metals and confirming the concentrations to use as compost as specified in the Standards for Composting, Schedule II A, Solid Waste Management Rules, 2016, FCO = Fertilizer Control Order, 1985, amendments in 2009 and 2013. It shall not be used for food crops;
- (v) Ensure valid consent to operate (CTO) from RSPCB for operation of STP;
- (vi) Ensure that all conditions/standards prescribed by RSPCB are complied duly;
- (vii) Ensure that chlorinator facility is operated only by trained staff and as per the standard operating procedures; in case of any accident and/or maintenance activity, ensure that the staff follows documented procedures only;
- (viii) Implement Emergency Response System (ERS) for the chlorine leakage; Guidelines and Emergency plan for handling and storing chlorine is attached as Appendix 24;
- (ix) Ensure proper knowledge transfer, hands-on training to municipal staff engaged in STP operation has been provided by contractor prior to handover of facility;
- (x) Operate and maintain the facility following standard operating procedures of operational manual;
- (xi) Undertake preventive and periodic maintenance activities as required;
- (xii) Conduct periodic training to workers; ensure that all safety apparatus at STP including personal protection equipment are in good condition all times; and are at easily accessible and identifiable place; periodically check the equipment, and conduct mock drills to deal with emergency situations;and
- (xiii) No wastewater from industrial premises (including domestic wastewater) shall be allowed to dispose into municipal sewers; monitor regularly and ensure that there is no illegal discharge through manholes or inspection chambers; conduct public awareness programs; in coordination with RSPCB;

213. There are also certain environmental risks from the operation of the sewer system, most notably from leaking sewer pipes as untreated fecal material can damage human health and contaminate both soil and groundwater. It will be imperative therefore that the operating agency establishes a procedure to routinely check the operation and integrity of the sewers, and to implement rapid and effective repairs where necessary. There is an occupation health risk to workers engaged in sewer maintenance activities. Following measures should inter alia be followed:

- (i) Establish regular maintenance program, including:
- (ii) Regular cleaning of grit chambers and sewer lines to remove grease, grit, and other debris that may lead to sewer backups. Cleaning should be conducted more frequently for problem areas;
- (iii) Inspection of the condition of sanitary sewer structures and identifying areas that need repair or maintenance. Items to note may include cracked/deteriorating pipes; leaking joints or seals at manhole; frequent line blockages; lines that generally flow at or near capacity; and suspected infiltration or exfiltration; and

- (iv) Monitoring of sewer flow to identify potential inflows and outflows;
- (v) Conduct repairs on priority based on the nature and severity of the problem; Immediate clearing of blockage or repair is warranted where an overflow is currently occurring or for urgent problems that may cause an imminent overflow (e.g. pump station failures, sewer line ruptures, or sewer line blockages);
- (vi) Review previous sewer maintenance records to help identify “hot spots” or areas with frequent maintenance problems and locations of potential system failure, and conduct preventative maintenance, rehabilitation, or replacement of lines as needed;
- (vii) When a spill, leak, and/or overflow occurs, keep sewage from entering the storm drain system by covering or blocking storm drain inlets or by containing and diverting the sewage away from open channels and other storm drain facilities (using sandbags, inflatable dams, etc.). Remove the sewage using vacuum equipment or use other measures to divert it back to the sanitary sewer system;
- (viii) Prohibit/prevent disposal of wastewater/effluent from industrial units in the sewers; ensure regular checking to ensure no illegal entry of industrial wastewater into sewers;
- (ix) Develop an Emergency Response System for the sewerage system leaks, burst and overflows, etc;
- (x) Provide necessary health and safety training to the staff;
- (xi) Provide all necessary personnel protection equipment;
- (xii) During cleaning/clearing of manholes and sewer lines great precautions should be taken for the safety of workers conducting such works;
- (xiii) As far as possible use remote/CCTV mechanism to identify/detect the problems in sewers and do not engage persons for this purpose;
- (xiv) As far as possible use mechanized cleaning of manholes and sewers by using modern techniques and machines and do not engage persons for this purpose;
- (xv) Ensure that maintenance staff and supervisors understand the risks; provide proper instructions, training and supervision;
- (xvi) Use gas detector to detect any hazardous or inflammable gas in confined areas like sewers /manholes prior to maintenance process;
- (xvii) Provide suitable personal protective equipment that may include waterproof / abrasion-resistant gloves, footwear, eye and respiratory protection. Face visors are particularly effective against splashes. Equipment selection and a proper system for inspection and maintenance are important;
- (xviii) Provide adequate welfare facilities, including clean water, soap, nail brushes, disposable paper towels, and where heavy contamination is foreseeable, showers;
- (xix) For remote locations portable welfare facilities should be provided;
- (xx) Areas for storage of clean and contaminated equipment should be segregated and separate from eating facilities;
- (xxi) Provide adequate first-aid equipment, including clean water or sterile wipes for cleansing wounds, and a supply of sterile, waterproof, adhesive dressings; and
- (xxii) Make effective arrangements for monitoring the health of staff. Keep emergency preparedness plan ready before starting the work of sewage system cleaning.

214. Biological hazards are among the environmental risks that may adversely impact the health and wellness of the workers and the community. Breakouts of diseases such as diarrhea, flu or pandemics such as the COVID19 shall be avoided. Designs and implementation of treatment systems shall ensure that disease-causing pathogens or viruses are disinfected and

will not cause any health issues. The World Health Organization has released an interim guidance on Water, Sanitation, Hygiene and Waste Management for the COVID19 virus (see Appendix 37). Measures on managing wastewater and fecal waste and keeping water supplies safe is critical to avoid the start or spread of any disease.

215. **Operation of FSSM.** About 11.5% of total households will be covered with FSSM system wherein which septage from individual septic tanks at houses will be collected via mobile / vehicle mount tankers with suction equipment, transport and discharged into STP for safe treatment and disposal. Although system will be completely mechanized, given the very harmful nature of septage, following precautionary measures shall be implemented:

- (i) Create awareness program on the FSSM in general public;
- (ii) Implement Health and Safety Plan for FSSM;
- (iii) Provide proper training to the workers, and staff in safe handling of FSSM tasks, provide all necessary personal protection equipment and ensure their usage;
- (iv) Ensure that the system is operated completely mechanically, with least involvement of workers; there shall be no direct contact of septage to any worker or staff;
- (v) Ensure proper facilities for workers including showers, wash areas, toilets, drinking water, eating and resting places;
- (vi) Conduct regular health checks; and
- (vii) Ensure that tankers cleaning is done mechanically, and in the demarcate area at STP, and the wastewater generated in the process shall be discharged into STP.

216. In Sardarshahar, at present people depend on septic tanks for discharge of sewage. Once the sewerage system is operational, these septic tanks will be decommissioned, and the wastewater outlets from the houses will be connected to sewers. Contractor should prepare a decommissioning plan for all septic tanks.

## **G. Cumulative Impacts**

217. Cumulative impacts are those that result from the successive, incremental, and/or combined effects of a project or activity when added to other existing, planned, and/or reasonably anticipated future ones. The subproject aims to improve urban water supply and sewerage in Sardarshahar town, by rehabilitating, augmenting, and creating required new infrastructure.

218. Currently, Sardarshahar Town water supply is fully groundwater based. The improved water supply system will utilize nearby surface water sources (IGNP Canal), and as the water from canal is unlikely to fulfil the entire town demand, it is also designed to utilize groundwater source to supplement the demand-supply gap.

219. As stated above the unfulfilled demand from the surface water will be supplemented by the groundwater. Presently, 10 MLD of water is abstracted from the existing tube wells and open wells. With the improved system, the groundwater abstraction will be decreased substantially from existing condition (10 MLD to 5.90 MLD) in base year, however, it will ultimately increase to 9.20 MLD in the year 2051. As per the Central Groundwater Board (CGWB) data, in Sardarshahar Block/Tehsil, the estimated net annual groundwater availability is 56.3507 MCM, the total utilization for all uses is estimated as 22.4238 MCM (39.79% utilization). With the project, the overall utilization will reduce initially, and increase ultimately in

the year by 2051. It may also be noted that, during low rainfall/ low dam storage years, the groundwater abstraction may increase. CGWB classified Sardarshahar tehsil as “Safe” (39.79% utilization but with no significant long-term decline in groundwater. Besides the increase in abstraction due to subproject, there is also likelihood of increase in abstraction for other uses, as the groundwater is also the main source of water for irrigation and industrial uses. Strict monitoring of groundwater abstraction, and various measures already suggested to enhance groundwater recharge, will minimize any cumulative impacts.

220. Both water supply and sewerage works are designed to be taken up simultaneously in Sardarshahar town, which is a small town congested with people, traffic and activities. There are sensitive places like hospitals, schools, and religious places. Works will be spread over entire town, covering all the roads and streets. Although no other notable public works are anticipated during the project implementation on public roads, there will be usual construction activities, such as building construction, as Sardarshahar is a developing town. Given dry and windy weather conditions, dust generation from cumulative construction activities may be significant, and this may increase the particulate matter concentration in ambient air. Dust control measures suggested in the EMP aim to minimize the dust generation from the subproject construction activities. Suggested trenchless method, by avoiding excavation, will also help in reducing the overall dust generation from the subproject activities. If there are any road improvement works designed to be implemented in Sardarshahar, scheduling of works needs to be coordinated with the respective road agency (ULB or Public Works Department) so that improved roads are not subjected for excavation. There is also a need to streamline water and sewer line works to avoid repeated excavations in the same road/street. The increase in road traffic, disturbance to traffic, public safety and worker safety issues, damage to existing utilities, influx of outstation workers, etc., due to various simultaneous construction works will be notable. However, the measures suggested in the EMP will minimize these impacts greatly, and therefore effective implementation of EMP must be ensured. Thus, the net impacts are unlikely to be significant.

221. Project Benefits. The citizens of the Sardarshahar will be the major beneficiaries of the improved water supply and sewerage systems. The subproject is primarily designed to improve environmental quality and living conditions of Sardarshahar town through provision of water supply and sewerage. The benefits arising from this subproject include: (i) increased availability of potable water at appropriate pressure to all households including urban poor; (ii) reduced time and costs in accessing alternative sources of water; (iii) better public health particularly reduction in waterborne and infectious diseases; (iv) reduced risk of groundwater contamination; (v) reduced risk of contamination of treated water supplies; and (vi) improvement in quality of water bodies due to disposal of treated effluent meeting disposal standards.

## **VII. PUBLIC CONSULTATION AND INFORMATION DISCLOSURE**

### **A. Overview**

222. The active participation of stakeholders including local community, NGOs/CBOs, and the media in all stages of project preparation and implementations essential for successful implementation as well as operation of the project. It will ensure that the subprojects are designed, constructed, and operated with utmost consideration to local needs, ensures community acceptance, and will bring maximum benefits to the people. Public consultation and information disclosure are a must as per the ADB SPS 2009.

223. A three-tier consultation process has been adopted for Phase-IV project: focus group discussions, primary household sample surveys and a town-level public consultation workshop. Most of the main stakeholders have already been identified and consulted during preparation of preliminary design and IEE, and any others that are identified during project implementation will be brought into the process in the future. Primary stakeholders of the subproject are: residents, shopkeepers and businesspeople who live and work alongside the roads in which network improvements will be provided, and government and utility agencies responsible for provision of services, SardarshaharNagar Palika, Public Health Engineering Department, and Rajasthan State Pollution Control Board. Secondary stakeholder are: NGOs and CBOs working in the area, community representatives, beneficiary community in general, government agencies, the executing and implementing agencies (LSGD and RUDSICO-EAP), Government of India and the ADB.

## **B. Public Consultation**

224. The public consultation and disclosure program are a continuous process throughout the project implementation, including project planning, design and construction. During project/IEE preparation stage, public consultations were conducted near two designed STP sites, and CWR locations and other locations of designed sewerage and water supply network to access the awareness of general public, present water supply situations, environmental and health conditions in town, their opinion about the designed project and suggestions. Residents, businesspersons (vendors, hawkers, shopkeepers etc.), Government officials, women and residents were consulted during public consultations in 28 August 2018. The designed CWR and STP facilities will cover the entire Sardarshahar town and the people consulted were all residents of Sardarshahar and are direct beneficiaries. Public consultations were also done at nearest habitations of pipeline alignments, SPS and STP locations. Details of public consultations are given in Appendix 25 and details of stakeholders meeting is provided in Appendix 26.

### **1. Consultation during Project Preparation**

225. Institutional consultations were conducted with the Governmental Departments such as Local Self Government Department, Public Works Department, Pollution Control Board, Public Health Engineering Department, Sardarshahar Nagar Palika, etc. The project designs are formulated in consultation with Sardarshahar Nagar Palika and the proposals have been finalized only after certification of Nagar Palika that the proposals suit the requirements of the ULB.

226. Focus-group discussions with affected persons and other stakeholders were conducted to learn their views and concerns. Public consultation had been conducted to assess the impact of designed civil work on the livelihood of the people, local environmental set up and also to prepare Initial Environmental Examination (IEE). The site verification reveals that, all the components of the sewerage works are either located on vacant government land or along the existing right-of-way (RoW) of the city. The subproject details have been explained in detail to the people who are involved in public consultation and also asked their suggestions and willingness to complete the designed civil work. It is observed that people shown their willingness in favour of the sewerage and water supply project at Sardarshahar. They are agreed to take up house service (sewer and water) connections. Few environmental issues like availability of access during construction, generation of dust and noise are for short period and not a major concern for residents. Details of public consultations are attached in Appendix 25

with this report. Main points/issues raises/feedback received are listed below:

- (i) Awareness and extent of the project and development components;
- (ii) Benefits of Project for the economic and social Upliftment of Community;
- (iii) Labour availability in the Project area or requirement of outside labour involvement;
- (iv) Local disturbances due to Project Construction Work;
- (v) Necessity of tree felling etc. at project sites;
- (vi) Water logging and drainage problem if any;
- (vii) Climatic Conditions;
- (viii) Drinking water problem;
- (ix) Sewerage system;
- (x) Forest and sensitive area nearby the project site;
- (xi) Movement of wild animal etc;
- (xii) Pollution level during construction period specially dust and noise pollution;
- (xiii) Health and Hygiene;
- (xiv) Safety of residents during construction phase;
- (xv) Solid waste disposal system;
- (xvi) Reuse of treated effluent;
- (xvii) Disposal of treated effluent in natural water body; and
- (xviii) Requirement of enhancement of other facilities.

227. It was observed that people are willing to extend their cooperation as the designed activities are supposed to enhance the infrastructure service levels and the living standard of the public. The public expressed their concern regarding the nuisance and disturbance (dust, road closure and traffic management activities) during the construction stage which can have impact on their day to day activities. Public demanded for advance notice before construction and proper warning signs along the construction area to avoid accidents and inconvenience. Public opined that an appropriate operation and maintenance system should be in place, especially for sewerage system, for its best functioning and to have the maximum health and aesthetic benefits.

228. A City Level Stakeholder Committee (CLC) has been formed in Churu district by Government orders. City Level Committee meeting was organized during the detailed design stage to which representatives of primary and secondary stakeholders were invited. City stakeholder committee meeting was organized in district headquarter Churu on dt. 13.07.2018 to discuss the matter of designed water supply and sewerage works in Sardarshahar under the chairmanship of District Collector, Churu in presence of public representatives, consultants, RUDSICO-EAP officials, PHED/ Municipal officials, NGOs and other invitee members. Designed scope of works and technology was discussed in the meeting. Land availability for the designed components was also confirmed by local authority. The feedback and concerns of the stakeholders were taken into consideration for finalization of design and scope of works. The project was agreed by the committee for further course of action of RUDSICO-EAP. Details of CLC meeting, minutes and photographs are attached in Annexure 10.

## **2. Consultation During Construction**

229. Prior to start of construction, Sardarshahar Nagar Palika and PIU with the assistance of Consultants will conduct information dissemination sessions at major intersections and solicit the help of the local community leaders/prominent citizens to encourage the participation of the people to discuss various social and environmental issues. At each ward/neighborhood level,



focus group meetings will be conducted to discuss and plan construction work with local communities to reduce disturbance and other impacts, and provide a mechanism through which stakeholders can participate in project monitoring and evaluation.

230. A constant communication will be established with the affected communities to redress the environmental issues likely to surface during construction and operational phases and also regarding the grievance redress mechanism. Nagar Palika/PIU with the help of Community Awareness and Public Participation Consultant (CAPPC) will organize public meetings and will appraise the communities about the progress on the implementation of EMP. Meeting will also be organized at the potential hotspots/sensitive locations before and during the construction.

### **C. Information Disclosure**

231. Draft IEE has already been disclosed executive summary of the IEE will be again translated in the local language and made available at the offices of Nagar Palika, RUDSICO-EAP PMU and PIU. Copies of summary will be provided to participants of city level workshop to be organized in Sardarshahar. Hard copies of the IEE will be accessible to citizens as a means to disclose the document and at the same time creating wider public awareness. Electronic version of the IEE in English and Executive Summary in Hindi will be placed in the official website of the Nagar Palika/RUDSICO-EAP after approval of the IEE by Government and ADB. Stakeholders will also be made aware of grievance register and redress mechanism.

232. Public information campaigns via newspaper/radio/TV, to explain the project details to a wider population will be conducted. Public disclosure meetings will be conducted at key project stages to inform the public about the progress and future plans. Prior to start of construction, the PIU will issue Notification on the start date of implementation in local newspapers. A board showing the details of the project will be displayed at the construction site for the information of general public.

233. Local communities will be continuously consulted regarding location of construction camps, access and hauling routes and other likely disturbances during construction. The road closure together with the designed detours will be communicated via advertising, pamphlets, radio broadcasts, road signage, etc.

234. Project related information shall be disclosed through public consultation and making relevant documents available in public locations. PMU and PIUs shall provide relevant safeguards information in a timely manner, in an accessible place and in a form and languages understandable to affected person and other stakeholders. For illiterate people, other suitable communication methods will be used.

235. The following documents shall be made available at the offices of project agencies - PMU, PIU and Block level offices for public reference, and shall also be uploaded on respective websites.

- (i) Summary of project and draft IEE (in Hindi and English)
- (ii) Draft IEE Report (in English)
- (iii) Final IEE Report (in English)
- (iv) Updated/amended IEE (in English)
- (v) Corrective action plan prepared during project implementation (English)
- (vi) Semi-annual Environmental Monitoring Reports (English)

236. A concise summary of project and draft IEE report (in Hindi), providing all necessary details of designs, implementation arrangements, subproject locations, likely issues and mitigation and monitoring measures and grievance redress mechanism, shall be made available to the stakeholders at consultation meetings. This should also provide contact information of project agency. This summary shall also be displayed at the notice boards of PMU, PIU and other public places. During project implementation, relevant information about any major changes to project scope will be shared with beneficiaries, affected persons, vulnerable groups, and other stakeholders. Draft IEE has already been posted on ADB and RUDSICO website. Further, the following will be again posted on ADB website. PMU will send written endorsement to ADB for disclosing these documents:

- (i) final IEE;
- (ii) a new or updated IEE and corrective action plan prepared during project implementation, if any; and
- (iii) environmental monitoring reports.

## **VIII. GRIEVANCE REDRESS MECHANISM**

### **A. Project Specific Grievance Redress Mechanism**

237. A project-specific, three-tier grievance redress mechanism (GRM) covers both environment and social issues. The GRM will be established to receive, evaluate, and facilitate the resolution of affected persons' concerns, complaints, and grievances about the social and environmental performance at project level. The GRM will aim to provide a time-bound and transparent mechanism to voice and resolve social and environmental concerns related to the project. Assessment of the GRM designed and implemented for Rajasthan Urban Sector Development Program (RUSDP)<sup>25</sup> the system was effective in timely resolution of grievances in a transparent manner.<sup>26</sup> The multichannel, project-specific, three-tier GRM is functional at RUSDP, hence the design of GRM for RSTDSP takes into account the designed institutional structure for RSTDSP and the positive features and learnings from the previous GRM.<sup>27</sup>

<sup>25</sup> The procedures followed for grievance redress during implementation of RUSDP Phase III included the project GRM and the pilot GRM software application (Smart Check) in Pali, the Sampark portal of Government of Rajasthan, and the Chief Minister's helpline. Complaints received through various channels were mostly minor and pertained to damage to existing water supply pipelines and disruption of water supply during construction, delays in road restoration, and pending new connections. Complaints related to damage to private property (compound walls/steps, etc.) were less in number. The grievances were mostly possible to resolve in coordination with the contractors. Complaints received were immediately referred by the CAPC/PMDSC supervision staff to the PIU Nodal officer (safeguards) and concerned engineer at PIU, who advised them on further action. Follow up with the contractor on complaint resolution was undertaken by PIU Nodal officer CAPC and PMDSC and final feedback sought from complainant upon resolution. Complaints requiring inter-departmental coordination were referred to the PMU for resolution, and feedback provided to complainant. The PMU kept regular track of grievances through Whatsapp and email alerts, ensuring registration and follow-up until resolution.

<sup>26</sup> Town-level grievance registration data indicates that a large number of grievances were registered, pointing to the effectiveness of the multi-channel GRM. No major grievance was received for RUSDP Phase III. The GRM helped smoothen the process of project implementation, hence the proposed architecture for the RSTDSP GRM remains similar, with some refinement, taking into account the changes in institutional setup proposed for project implementation.

<sup>27</sup> Continued logistics support at field level will be key to successful management of grievance redress under RSTDSP. The target date for establishment of the first level (PIU level) and second level (Zonal level) of GRM is

238. **Common GRM.** A common GRM will be in place for social, environmental, or any other grievances related to the project. Implementation of the resettlement plans/RIPPs/DDRs/IEEs will follow the GRM described below. The GRM will provide an accessible and trusted platform for receiving and facilitating resolution of affected persons' grievances related to the project.

239. Public awareness campaigns within entire ULB/Municipal area will ensure that awareness on grievance redress procedures is generated. The nodal officer- social/environment at field level through community awareness and public participation consultant (CAPPC) will conduct ULB/Municipal area-based awareness campaigns to ensure that poor and vulnerable households are made aware of grievance redress procedures and entitlements. Contractors will provide pamphlets to communities prior to start of works and billboards during construction. The pamphlets and billboards will include relevant environmental and social safeguards, GRM information, and contact details of key personnel from PIU and contractors.

240. Affected persons will have the flexibility of conveying grievances/suggestions by dropping grievance redress/suggestion forms in complaint/suggestion boxes that will be installed by project PIUs or by e-mail, by post, or by writing in a complaints register in ULB offices/complaints register at contractor's work site<sup>28</sup> or by sending a Whatsapp message to the PIU<sup>29</sup> or by dialling the phone number of town level PIU/CAPPC or by dialling a toll-free number.<sup>30</sup> Any aggrieved person can also avail the facilities of online grievance monitoring system 'Rajasthan Sampark' portal to register their grievances which is a parallel mechanism of grievance registration, in addition to the project GRM.<sup>31</sup> Careful documentation of the name of the complainant, date of receipt of the complaint, address/contact details of the person, location of the problem area, and how the problem was resolved will be undertaken and feedback provided to the complainant on action/decision taken. The Safeguard and Safety Officer of town/city level PIU will have the overall responsibility for timely grievance redressal on environmental and social safeguards issues and for registration of grievances, related disclosure, with the assistance of project consultants. In case of grievances that are immediate and urgent in the perception of the complainant, the contractor, and officials of PIU with assistance from construction management and supervision consultants (CMSC) and CAPPC on-site will provide the most easily accessible or first level of contact for quick resolution of grievances. Contact numbers and names of the concerned PIU safeguard and safety officer, contractors, CAPPC and CMSC personal will be posted at all construction sites at visible locations.

- (i) **1st level grievance.** The contractors, PIU Executive Engineer (EE)/Assistant Engineer (AE) designated as safeguard and safety officer (social and environment), CMSC (safeguard staff) and CAPPC can immediately resolve

---

before loan negotiation.

<sup>28</sup> RUSDP piloted an online application based live GRM counter for resolution of public grievances over and above the usual process of grievance registration and redressal. This app based GRM - "RUIDP Smart Check" is available at Google play store (free of cost) and is operational. The RUIDP Smart Check "app" was launched in Pali town in July 2017 and is proposed to be scaled up in RSTDSP project towns. For persons without access to the application, the traditional channels will continue to be available.

<sup>29</sup> It is suggested for each PIU to have a dedicated whatsapp group for registration of grievances and receipt of quick feedback, to be followed by more formal communication.


<sup>30</sup> Project contractors in all project towns will have a toll-free number with specific working hours for registration of grievances related to RSTDSP.

<sup>31</sup> <http://www.sampark.rajasthan.gov.in/RajSamWelcome.aspx>

- issues on-site, in consultation with each other and will be required to do so within 7 days of receipt of a complaint/grievance. If required, city level monitoring committee (CLMC)<sup>32</sup> will be involved in resolution of grievances at the 1<sup>st</sup> level.
- (ii) **2nd level grievance.** All grievances that cannot be redressed within 7 days at field/PIU level will be brought to the notice of Zonal PIU headed by Additional Chief Engineer (ACE). The ACE at zonal PIU will resolve the grievance within 7 days of receipt of complaint/grievance in discussion with the ASO, field level PIU, CMSC, CAPPCC and the contractor.
  - (iii) **3rd level grievance.** All the grievances that are not addressed by Zonal PIU within 7 days of receipt will be brought to the notice of the PMU. Depending on the nature of grievance, the Project Officer (Social/Environment) at PMU will resolve the grievance within 15 days of receipt of grievance with necessary coordination of Zonal PIU and CMSC and guidance/instruction of Additional Project Director (APD-PMU).
  - (iv) Grievances not redressed through this process within/at the project level within stipulated time period will be referred to the CLC/GRC, which has been set up.<sup>33</sup> In its role as a GRC, the CLC will meet whenever there is an urgent, pending grievance. Other grievances can be discussed during its regular meetings. Zonal PIU will inform the CLC regarding any grievances required to be resolved urgently. The GRC will resolve the grievance within 15 days of receiving the complaint. In case of any indigenous peoples impacts in subprojects, the CLC/GRC must have representation of the affected indigenous people community, the chief of the tribe or a member of the tribal council as traditional arbitrator (to ensure that traditional grievance redress systems are integrated) and an NGO working with indigenous people groups.
  - (v) The multi-tier GRM for the project is outlined below (Figure 21), each tier having time-bound schedules and with responsible persons identified to address grievances and seek appropriate persons' advice at each stage, as required. The GRC will continue to function throughout the project duration.

<sup>32</sup> The CLMC has been formed at the town/city level for planning and monitoring of work, resolve issues related to departmental coordination etc. It is headed by Commissioner/Executive Officer ULB (Chairman) and city engineer of public health engineering department (PHED), public works department (PWD) and head of PIU acting as Member Secretary.

<sup>33</sup> City Level Committee (CLC)/grievance redress committees (GRCs) has been constituted for each town/city under the Chairmanship of District Collector to provide overall subproject guidance and "to sort out issues and remove hindrances, if any". CLC formed at city-level/district level with members composed of: District Collector as Chairperson, and following as members: ULB Commissioner/Mayor/Chairman; Deputy Mayor/Vice Chairman ULB; Chairman / Secretary Urban Improvement Trust (UIT); Head of Zonal/field level PIU as Member Secretary; one representative each from relevant government departments as appropriate (PWD/PHED/Town Planning Department etc.). All CLCs in their role as GRCs will have at least one-woman member/chairperson. In addition, for project-related grievances, representatives of affected persons, community-based organizations (CBOs), and eminent citizens will be invited as observers in GRC meetings. The concerned Member of Parliament (MP) and Member of Legislative Assembly are also part of the CLC.

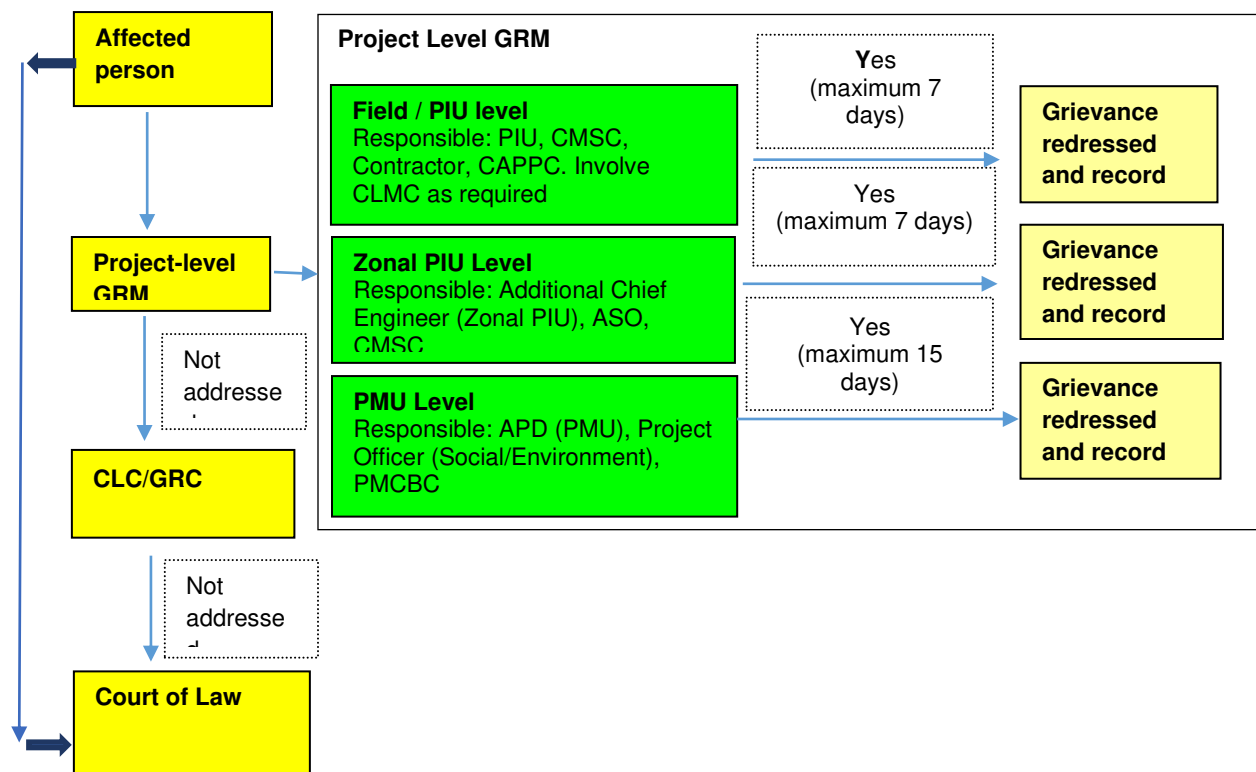**Figure 21: Grievance Redress Mechanism-RSTDSP**

Note: APD = Additional Project Director, ASO = Assistant Safeguards Officer, CAPPCC = community awareness and public participation consultant, CMSC = construction management and supervision consultants, CLC = city level committee, CLMC = city level monitoring committee, GRC = grievance redress committee, PIU = project implementation unit, PMU = program management unit, PMCBC = project management and capacity building consultant.

241. The project GRM notwithstanding, an aggrieved person shall have access to the country's legal system at any stage, and accessing the country's legal system can run parallel to accessing the GRM and is not dependent on the negative outcome of the GRM. In case of grievance related to land acquisition, resettlement and rehabilitation, the affected persons will have to approach a legal body/court specially designed under the Right to Fair Compensation and Transparency in Land Acquisition, Rehabilitation and Resettlement Act (RFCTLARRA), 2013.<sup>34</sup>

242. People who are, or may in the future be, adversely affected by the project may submit complaints to ADB's Accountability Mechanism. The Accountability Mechanism provides an independent forum and process whereby people adversely affected by ADB-assisted projects can voice, and seek a resolution of their problems, as well as report alleged violations of ADB's operational policies and procedures. Before submitting a complaint to the Accountability

<sup>34</sup> The Authority admits grievance only with reference to the Land Acquisition and R&R issues under the RFCTLARRA, 2013.

Mechanism, affected people should make an effort in good faith to solve their problems by working with the concerned ADB operations department. Only after doing that, and if they are still dissatisfied, should they approach the Accountability Mechanism<sup>35</sup>.

243. **Record-keeping.** The PIU of each town/city will keep records of grievances received, including contact details of complainant, date the complaint was received, nature of grievance, agreed corrective actions and the date these were affected and final outcome. The number of grievances recorded and resolved, and the outcomes will be displayed/disclosed in the PMU office, PIU offices, and on the web, as well as reported in monitoring reports submitted to ADB on a semi-annual basis. The sample grievance registration format is attached as **Appendix 27**.

244. **Periodic review and documentation of lessons learned.** The PMU Project Officers (Social and Environment) will periodically review the functioning of the GRM in each town and record information on the effectiveness of the mechanism, especially on the project's ability to prevent and address grievances.

245. **Costs.** Contractors are required to allocated budget for pamphlets and billboards as part of the EMP. Costs involved in resolving the complaints (meetings, consultations, communication and reporting/information dissemination) will be borne by the concerned PIU at town level while costs related to escalated grievances will be met by the PMU. Cost estimates for grievance redress are included in resettlement cost estimates.

246. The PMU of RSTDSP has issued an Office Order dated May 4, 2018 establishing the GRM as described above (Appendix 28).

## IX. ENVIRONMENTAL MANAGEMENT PLAN

### A. Environmental Management Plan

247. An Environmental Management Plan (EMP) has been developed to provide mitigation measures to reduce all negative impacts to acceptable level and monitoring the same. This is presented in the following tables, which show the potential environmental impacts, designed mitigation measures and responsible agencies for implementation and monitoring.

248. The purpose of the environmental management plan (EMP) is to ensure that the activities are undertaken in a responsible, non-detrimental manner with the objectives of: (i) providing a proactive, feasible, and practical working tool to enable the measurement and monitoring of environmental performance on-site; (ii) guiding and controlling the implementation of findings and recommendations of the environmental assessment conducted for the project; (iii) detailing specific actions deemed necessary to assist in mitigating the environmental impact of the project; and (iv) ensuring that safety recommendations are complied with.

249. A copy of the EMP must be kept at work sites at all times. This EMP was included in the bid documents and will be further reviewed and updated during implementation. The EMP is made binding on all contractors operating on the site and was included in the contractual clauses. Non-compliance with, or any deviation from, the conditions set out in this document constitutes a failure in compliance.

---

<sup>35</sup> Accountability Mechanism. <http://www.adb.org/Accountability-Mechanism/default.asp>.



250. For civil works, the contractor will be required to (i) establish an operational system for managing environmental impacts (ii) carry out all of the monitoring and mitigation measures set forth in the EMP; and (iii) implement any corrective or preventative actions set out in safeguards monitoring reports that the employer will prepare from time to time to monitor implementation of this IEE and EMP. The contractor shall allocate budget for compliance with these EMP measures, requirements and actions.

251. For civil works, the contractor will be required to (i) establish an operational system for managing environmental impacts (ii) carry out all of the monitoring and mitigation measures set forth in the EMP; and (iii) implement any corrective or preventative actions set out in safeguards monitoring reports that the employer will prepare from time to time to monitor implementation of this IEE and EMP. The contractor shall allocate budget for compliance with these EMP measures, requirements and actions.

252. The contractor has to submitted to PIU, for review and approval, a site environmental plan (SEP) including (i) designed sites/locations for construction work camps, storage areas, hauling roads, lay down areas, disposal areas for solid and hazardous wastes; (ii) specific mitigation measures following the approved EMP; (iii) monitoring program as per SEP; and (iv) budget for SEP implementation. No works can commence prior to approval of SEP.

253. The following tables show the potential environmental impacts, designed mitigation measures and responsible agencies for implementation and monitoring.

**Table 14: Design Stage Environmental Management Plan**

| <b>Field</b>                               | <b>Anticipated Impact</b>                                                                                                     | <b>Mitigation Measures</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>Responsible for Implementation/ Monitoring</b> | <b>Cost and Source of Funds</b> |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|---------------------------------|
| Sewage Treatment Plant (STP)               | Odour nuisance and aesthetics                                                                                                 | (i) Provide a green buffer zone of 10-20 m wide all around the STP with trees in multi-rows. This will act as a visual screen around the facility and will improve the aesthetic appearance. Treated wastewater shall be used for plantation.<br>(ii) Develop layout plan of STP such that odour generating units (such as sludge / solids handling facilities) are located away from the surrounding area with future development potential.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | DBO Contractor / PIU                              | Project costs                   |
| All work sites                             | Tree cutting                                                                                                                  | (i) Minimize removal of trees by adopting to site condition and with appropriate layout design of STP and CWR or any other site with trees<br>(ii) Obtain prior permission for tree cutting at STP and CWR site or at any other site that may require tree cutting finalized during detailed design<br>(iii) Plant and maintain 3 trees for each tree that is removed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | DBO Contractor / PIU                              | Project costs                   |
| Design of water supply and sewerage system | Non-compliance or non-adherence with the environmental considerations designed in preliminary designs during detailed design: | Ensure compliance with the following during the detailed design:<br>(i) Adopting conjunctive use approach water source; utilizing feasible surface water sources and groundwater source optimally thereby reducing the existing groundwater abstraction to the extent possible<br>(ii) Locating components and facilities appropriately by avoiding sensitive locations like forests and protected areas (environmentally, socially, and archeologically).<br>(iii) Recovering wash water from treatment process to optimise the water use<br>(iv) Treatment and reuse of sludge from treatment process; providing a covered shed of adequate space to air dry the processed sludge for at least 15 days at STPs<br>(v) Designing the entire system to maintain optimal flow and terminal pressure, and optimising the overall energy usage<br>(vi) Avoiding usage of asbestos containing materials<br>(vii) Reducing the incidence of water borne diseases by providing 100% population including urban poor with potable water supplies<br>(viii) Reuse of treated wastewater from STP for non-potable uses thereby reducing the load in freshwater resources<br>(ix) Adopting a combined approach of sewerage system and faecal sludge and septage management to cover 100% population of | DBO Contractor / PMU                              | Project costs                   |

| Field               | Anticipated Impact                                                                                     | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Responsible for Implementation/<br>Monitoring | Cost and Source of Funds    |
|---------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|-----------------------------|
|                     |                                                                                                        | the town with safe collection, conveyance and treatment of sewage generated in the town<br>(x) Provision of appropriate personal protection equipment to the workers and staff                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                               |                             |
| Seismic sensitivity | Damage to infrastructure and potential risks: project area in moderate earthquake risk zone (Zone III) | (i) Designs of project component structures shall comply with relevant codes of design such as Bureau of Indian Standard (BIS) specifications for earthquake resistant design (IS: 1893: Criteria for earthquake resistant design of structures).                                                                                                                                                                                                                                                                                                                                                                  | DBO Contractor/PIU                            | Project costs               |
| Groundwater source  | Source sustainability and over exploitation of groundwater                                             | (i) Prepare a groundwater harvesting and artificial recharge plan;<br>(ii) Creation of artificial recharge pits in public places / public buildings. Local body can issue a notification to this effect.<br>(iii) Household level artificial recharge (like roof top rainwater harvesting) should be encouraged.<br>(iv) Groundwater regulation – options to close / discontinue all the tube wells in houses used for domestic purposes in Sardarshahar in a phased manner once the project is implemented.                                                                                                       | DBO Contractor/PIU                            | Project costs               |
|                     | Groundwater contamination                                                                              | (i) Prepare a source protection plan for tube wells and open wells<br>(ii) Prevent flow of untreated wastewater in the drains<br>(iii) Ensure proper construction of tube wells including casing pipes to prevent water contamination from well spaces, and due to flooding<br>(iv) Measures should be taken to control the open defecation, and to close all unsafe latrines (for example pit latrines).<br>(v) Awareness programs shall be conducted regarding the sanitation practices and its effect on groundwater quality                                                                                    | DBO Contractor and ULB/PIU                    | Project costs and ULB costs |
| CWRs and STP        | Hazardous / harmful chemicals                                                                          | (i) Reduce the use of chemicals in the treatment process to the extent possible (water treatment); provide non-chemical alternatives or easily recoverable and/or reusable chemicals or biocompatible alternatives.<br>(ii) Establish proper handling / storage / application system according to the relevant standards, safety precautions and prevent accidental release / spill<br>(iii) Provide leak/spill detection, collection / capture and safe disposal facilities such as chlorine absorption and neutralization facility<br>(iv) Provide ventilation, lighting, entry and exit facilities; visible and | DBO Contractor/PIU                            | Project costs               |

| Field                         | Anticipated Impact                                                                                     | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Responsible for Implementation/ Monitoring | Cost and Source of Funds |           |    |           |    |           |    |                      |    |                         |   |                               |                                   |                      |               |
|-------------------------------|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------|-----------|----|-----------|----|-----------|----|----------------------|----|-------------------------|---|-------------------------------|-----------------------------------|----------------------|---------------|
|                               |                                                                                                        | audible alarm facilities to alert chemical/chlorine leak<br>(v) Facility for isolation in the event of major leakages<br>(vi) Eye wash and shower facility<br>(vii) Personal protection and safety equipment for the operators (masks, oxygen cylinders, gloves, etc.,)<br>(viii) Provide training to the staff in safe handling and application of chemicals, material safety, and standard operating procedures and emergency responses<br>(ix) Develop emergency response procedures                                                                                                                                                 |                                            |                          |           |    |           |    |           |    |                      |    |                         |   |                               |                                   |                      |               |
| Sewage Treatment Plant (STP)  | Inefficient sewage treatment, treated effluent characteristics not satisfying the CPCB/RSPCB standards | (i) Ensure that the selected process is appropriate for the town and meets discharge standards and facilitate reuse<br>(ii) Treated effluent should meet the criteria set by RSPCB/CPCB or the following bid specified parameters, whichever are stringent: <table><tr><th>Parameter</th><th>Standards</th></tr><tr><td>BOD, mg/l</td><td>10</td></tr><tr><td>TSS, mg/l</td><td>20</td></tr><tr><td>COD, mg/l</td><td>50</td></tr><tr><td>Nitrogen-Total, mg/l</td><td>10</td></tr><tr><td>Phosphorus- Total, mg/l</td><td>1</td></tr><tr><td>Faecal Coliform (MPN/ 100 ml)</td><td>100 (Desirable) 230 (Permissible)</td></tr></table> | Parameter                                  | Standards                | BOD, mg/l | 10 | TSS, mg/l | 20 | COD, mg/l | 50 | Nitrogen-Total, mg/l | 10 | Phosphorus- Total, mg/l | 1 | Faecal Coliform (MPN/ 100 ml) | 100 (Desirable) 230 (Permissible) | DBO Contractor / PIU | Project costs |
| Parameter                     | Standards                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                            |                          |           |    |           |    |           |    |                      |    |                         |   |                               |                                   |                      |               |
| BOD, mg/l                     | 10                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                            |                          |           |    |           |    |           |    |                      |    |                         |   |                               |                                   |                      |               |
| TSS, mg/l                     | 20                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                            |                          |           |    |           |    |           |    |                      |    |                         |   |                               |                                   |                      |               |
| COD, mg/l                     | 50                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                            |                          |           |    |           |    |           |    |                      |    |                         |   |                               |                                   |                      |               |
| Nitrogen-Total, mg/l          | 10                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                            |                          |           |    |           |    |           |    |                      |    |                         |   |                               |                                   |                      |               |
| Phosphorus- Total, mg/l       | 1                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                            |                          |           |    |           |    |           |    |                      |    |                         |   |                               |                                   |                      |               |
| Faecal Coliform (MPN/ 100 ml) | 100 (Desirable) 230 (Permissible)                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                            |                          |           |    |           |    |           |    |                      |    |                         |   |                               |                                   |                      |               |
| Change in raw sewage quality  | Mixing of industrial effluent with sewage                                                              | (i) No industrial wastewater shall be allowed to dispose into municipal sewers<br>(ii) As there is a risk of potential mixing of industrial waste, no domestic wastewater from industrial units shall be allowed into municipal sewers<br>(iii) Ensure that there is no illegal discharge through manholes or inspection chambers<br>(iv) Conduct public awareness programs; in coordination with RSPCB and CLC.<br>, (v) Conduct regular wastewater quality monitoring (at inlet and at outlet of STP) to ensure that the treated wastewater quality complies with the effluent standards                                              | DBO Contractor and PIU / PMU               | Project Costs            |           |    |           |    |           |    |                      |    |                         |   |                               |                                   |                      |               |

| Field | Anticipated Impact                                                                                              | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Responsible for Implementation/ Monitoring | Cost and Source of Funds |
|-------|-----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------|
| STP   | Use of treated wastewater for reuse applications                                                                | Develop wastewater reuse plan for Sardarshahar town in consultation with CLC as per the Sewerage and Wastewater Policy, 2016. The Reuse Plan shall inter alia include the following:<br>(i) Identify potential reuse application in Sardarshahar, and establish quality criteria for each of the use<br>(ii) For applications that use treated wastewater directly (e.g., agriculture), the quality required for such application in safe manner considering health, environment and crop yield concerns shall be ensured;<br>(iii) Prepare a reuse plan for agriculture, if that is the priority use or one of the applications as per the CLC in Sardarshahar, clearly indicating the limits (geographical / crops / type of application / type of soils etc.); adopt international good practice suggested by agencies like World Health Organization (WHO), Food and Agricultural Organization (FAO) of the United Nations.<br>(iv) Plan should include awareness and training provisions and responsibilities; these can be conducted by concerned department (e.g., Agricultural Department, District Collectorate)<br>(v) Carryout regular / online monitoring of critical quality parameters of treated wastewater to ensure that they meet the preset standards established for reuse | DBO Contractor / PIU                       | Project costs            |
| STP   | Treated effluent discharge into water channel/drains and associated impacts on river water and downstream users | (i) Obtain of consent of RSPCB for discharge of treated wastewater into drains<br>(ii) Conduct a baseline water quality assessment of receiving water body<br>(iii) Regularly monitor the treated wastewater quality at STP and ensure that it meets the discharge standards<br>(iv) Monitor water quality periodically during operation phase as per the Environmental Monitoring Plan                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | DBO Contractor/PIU                         | Project Costs            |
| STP   | Sludge management and reuse                                                                                     | (i) Prepare a sludge management plan<br>(ii) Prepare a dried Sludge utilization plan for Sardarshahar within the help of Agriculture Department / CLC; plan should also include if any additional processing is required for sludge to use as soil conditioner<br>(iii) Plan should clearly various potential uses and demand in Sardarshahar and surroundings<br>(iv) Establish usage limits, where required, (geographical / crops /                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | DBO Contractor/PIU                         | Project costs            |

| Field                                     | Anticipated Impact                                                            | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Responsible for Implementation/ Monitoring | Cost and Source of Funds |
|-------------------------------------------|-------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------|
|                                           |                                                                               | <p>type of application / type of soils etc.); adopt international good practice suggested by agencies like World Health Organization (WHO), Food and Agricultural Organization (FAO) of the United Nations.</p> <p>(v) Identify a landfill / suitable site for disposal of surplus dried sludge</p> <p>(vi) Monitor sludge quality during operation phase as per the Environmental Monitoring Plan, ensure that it meets the quality parameters established by FCO</p> <p>(vii) In case of sludge not meeting the quality parameters, it shall not be used as soil condition, and shall be disposed at appropriate disposal site (if it falls under hazardous category, it shall be disposed as per the Hazardous Waste Management Rules, 2016)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                            |                          |
| Sewer network – collection and conveyance | Poor design leading to overflows, blockages, and creating nuisance, pollution | <p>(i) Limit the sewer depth where possible</p> <p>(ii) Sewers shall be laid away from water supply lines and drains (at least 1 m, wherever possible);</p> <p>(iii) In all cases, the sewer line should be laid deeper than the water pipeline (the difference between top of the sewer and bottom of water pipeline should be at least 300 mm)</p> <p>(iv) In unavoidable, where sewers are to be laid close to storm water drains, appropriate pipe material shall be selected (stoneware pipes shall be avoided)</p> <p>(v) For shallower sewers and especially in narrow roads, use small inspection chambers in lieu of manholes;</p> <p>(vi) Design manhole covers to withstand anticipated loads and ensure that the covers can be readily replaced if broken to minimize silt/garbage entry</p> <p>(vii) Ensure sufficient hydraulic capacity to accommodate peak flows and adequate slope and gas vents in gravity mains to prevent buildup of solids and hydrogen sulfide generation</p> <p>(viii) Take necessary precautionary measures to protect sewer network, and to avoid disposal of solid wastes, debris, wastewater into newly laid sewers from the time it is constructed to the start of operation phase</p> | DBO Contractor/PIU                         | Project costs            |



| Field                                                                                                                                                           | Anticipated Impact                                                                               | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Responsible for Implementation/<br>Monitoring | Cost and Source of Funds |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|--------------------------|
| FSSM                                                                                                                                                            | Occupational health and safety issues, and impact on STP process                                 | (i) Conduct detailed survey of the households to be covered with FSSM to design the system to suit the local conditions, such as type of septic tanks and their location in the houses<br>(ii) Create awareness program on the FSSM from collection to treatment system that will be adopted<br>(iii) Design the sewage treatment process duly considering mixing of septage<br>(iv) Ensure that the FSSM system is completely mechanized no human touch, even accidentally, from collection at household to discharge into STP, and in periodic cleaning of tankers<br>(v) Demarcate a proper area for cleaning of mobile tankers in STP premises, and ensure that the wastewater shall be discharged into STP<br>(vi) Provide proper training to the workers, and staff in safe handling of FSSM tasks, provide all necessary personal protection equipment<br>(vii) Ensure proper facilities for workers including showers, wash areas, toilets, drinking water, eating and resting places<br>(viii) Conduct regular health checks<br>(ix) Prepare Health and Safety Plan for FSSM | DBO Contractor/PIU                            | Project costs            |
| Asbestos cement (AC) pipes in existing water supply system: clearing, transfer and disposal; work in narrow streets, and interventions in existing AC pipelines | Health impacts due to air borne asbestos if handled unsafely, cut, drilled or broken into pieces | (i) Develop ACM Management Plan (AMP) that includes identification of hazards, the use of proper safety gear and disposal methods. Sample AMP is provided in Appendix 20. Adhere to the workflow process suggested in Figure 20.<br>(ii) Conduct awareness program on safety during the construction work<br>(iii) Undertake the construction work stretch-wise; excavation, pipe laying and trench refilling should be completed on the same day<br>(iv) Provide barricades, and deploy security personnel to ensure safe movement of people and also to prevent unnecessary entry and to avoid accidental fall into open trenches<br>(v) Identify risk of intervention with existing AC pipes. If there is significant risk, implement the AMP strictly that includes identification of hazards, the use of proper safety gear and disposal methods.<br>(vii) Maintain records of AC pipes as per the AMP<br>Refer to the instructions of the Asbestos Expert                                                                                                                       | DBO Contractor/PMU                            | Project costs            |

| Field                                      | Anticipated Impact                                                                               | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Responsible for Implementation/<br>Monitoring | Cost and Source of Funds |
|--------------------------------------------|--------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|--------------------------|
| Asbestos materials in existing PHED campus | Health impacts due to air borne asbestos if handled unsafely, cut, drilled or broken into pieces | (i) Conduct survey and inventory of existing asbestos materials on site<br>(ii) Conduct risk assessment to determine extent of asbestos materials currently on-site<br>(iii) Coordinate and provide support to the asbestos management service provider on the requirement of sampling, testing and disposing existing asbestos materials<br>(iv) Ensure the selected area for temporary storage is suitable for safe storage of asbestos materials<br>(v) Incorporate international and national standards considered in designing the temporary storage<br>(vi) Ensure that handling and disposal of asbestos materials are carried out by specially trained service provider/s following Government of India requirements, or in their absence, internationally recognized procedures<br>(vii) Refer to the requirements of the Asbestos Management Plan (Appendix 20) and instructions of the Asbestos Expert | DBO Contractor/PMU                            | Project costs            |
| Preparation of plans and protocols         | Various impacts                                                                                  | (i) Preparation of ACM Management Plan<br>(ii) Prepare traffic management plan<br>(iii) Prepare occupational health and safety plan<br>(iv) Prepare spoils management plan                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | DBO Contractor and PMCBC (for ACM plan)       | Approval of plans by PIU |

**Table 15: Environmental Management Plan of Anticipated Impacts during Pre-Construction**

| Field                                                                         | Anticipated Impact                                          | Mitigation Measures                                               | Responsible for Implementation                    | Monitoring of Mitigation | Cost and Source of Funds                 |
|-------------------------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------------|---------------------------------------------------|--------------------------|------------------------------------------|
| Compliance with environmental subproject selection criteria                   | Environmental impacts due to subproject                     | Compliance with environmental subproject selection criteria       | DBO Contractor, PIU and Sardarshahar Nagar Palika | PMU                      | No costs required                        |
| Environmental monitoring of baseline conditions of air, noise, water and soil | To establish base line environmental conditions             | Environmental monitoring through NABL accredited laboratory       | Construction contractor                           | Consultants/PIU          | Contractor                               |
| Legal compliance                                                              | Environmental legal noncompliance may attract legal actions | (i) Obtain all consents, clearances (CTE/CTO from RSPCB), permits | PIU/Consultants in coordination of Nagar Parishad | PMU                      | Cost of obtaining all consents, permits, |

| Field     | Anticipated Impact                                                                                               | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Responsible for Implementation                                    | Monitoring of Mitigation                                                                  | Cost and Source of Funds                                                     |
|-----------|------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
|           | Failure to obtain necessary consents Permits, NOCs etc. can result to design revisions and /or stoppage of works | NOCs etc. before start of construction works<br>Ensure that all necessary approvals for construction to be obtained by contractor are in place before start of construction<br>(ii)Following consents are required-<br>Tree cutting-local authority<br>Storage, handling and transport of hazardous materials- RSPCB<br>Sand mining, quarries, borrow areas- Department of mines and Geology<br>Traffic diversion/road cutting- local authority, traffic police<br>(iii)Acknowledge in writing and provide report on compliance all obtained consents, permits, clearance, NOCs etc. (intake works)<br>(iv)Include in detailed design drawings and documents all conditions and provisions; if necessary |                                                                   |                                                                                           | clearance, NOCs etc. prior to start of civil works<br>responsibility of PIU. |
| Utilities | Telephone lines, electric poles and wires, water lines within designed project area                              | (i) Identify and include locations and operators of these utilities in the detailed design documents to prevent                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | DBO Contractor in collaboration with PIU and with approval of PMU | (i) List of affected utilities and operators;<br>(ii) Bid document to include requirement | No cost required.<br><br>Mitigation measures are part of TOR of PMU,         |

| Field                                                                                        | Anticipated Impact                                                              | Mitigation Measures                                                                                                                                                                                                                                                                                                                                   | Responsible for Implementation                                       | Monitoring of Mitigation                                                                                                                                                                                                          | Cost and Source of Funds                                                                                              |
|----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
|                                                                                              |                                                                                 | unnecessary disruption of services during construction phase; and<br>(ii) Require construction contractors to prepare a contingency plan to include actions to be taken in case of unintentional interruption of services.<br><br>(iii) Require contractors to prepare spoils management plan (Appendix 21) and traffic management plan (Appendix 22) |                                                                      | for a contingency plan for service interruptions (example provision of water if disruption is more than 24 hours), spoil management plan (Appendix 21), and traffic management plan (Appendix 22)                                 | PIU and Consultant                                                                                                    |
| Social and Cultural Resources                                                                | Ground disturbance can uncover and damage archaeological and historical remains | Develop a protocol for use by the construction contractors in conducting any excavation work, to ensure that any chance finds are recognized, and measures are taken to ensure they are protected and conserved.                                                                                                                                      | DBO Contractor and PIU                                               | Chance Finds Protocol                                                                                                                                                                                                             | No cost required.<br><br>Mitigation measures are part of TOR of PIU and Consultant                                    |
| Construction work camps, hot mix plants, stockpile areas, storage areas, and disposal areas. | Disruption to traffic flow and sensitive receptors                              | (i) Prioritize areas within or nearest possible vacant space in the project location;<br>(ii) If it is deemed necessary to locate elsewhere, consider sites that will not promote instability and result in destruction of property, vegetation, irrigation, and drinking water supply                                                                | Contractor to finalize locations in consultation and approval of PIU | (i) List of selected sites for construction work camps, hot mix plants, stockpile areas, storage areas, and disposal areas.<br>(ii) Written consent of landowner/s (not lessee/s) for reuse of excess spoils to agricultural land | No cost required.<br><br>Mitigation measures are part of TOR of PIU and Consultant and also part of contractual terms |

| Field                | Anticipated Impact                                                                                                                | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Responsible for Implementation                                                                            | Monitoring of Mitigation                                                                                                                                      | Cost and Source of Funds                                                                                   |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
|                      |                                                                                                                                   | <p>systems;</p> <p>(iii) Do not consider residential areas;</p> <p>(iv) Take extreme care in selecting sites to avoid direct disposal to water body which will inconvenience the community.</p> <p>(v) For excess spoil disposal, ensure</p> <p>(a) site shall be selected preferably from barren, infertile lands. In case agricultural land needs to be selected, written consent from landowners (not lessees) will be obtained;</p> <p>(b) debris disposal site shall be at least 200 m away from surface water bodies; (c) no residential areas shall be located within 50 m downwind side of the site; and (d) site is minimum 250 m away from sensitive locations like settlements, ponds/lakes or other water bodies.</p> |                                                                                                           |                                                                                                                                                               |                                                                                                            |
| Sources of Materials | Extraction of materials can disrupt natural land contours and vegetation resulting in accelerated erosion, disturbance in natural | <p>(i) Prioritize sites already permitted by the Department of Mines and Geology</p> <p>(ii) If other sites are necessary, inform construction contractor</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | DBO Contractor to prepare list of approved quarry sites and sources of materials with the approval of PIU | <p>(i) List of approved quarry sites and sources of materials;</p> <p>(ii) Bid document to include requirement for verification of suitability of sources</p> | <p>No cost required.</p> <p>Mitigation measures are part of TOR of PIU and Consultant and also part of</p> |

| Field                                     | Anticipated Impact                                                                                                | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Responsible for Implementation        | Monitoring of Mitigation                                      | Cost and Source of Funds                                                                                                                                                                               |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                           | drainage patterns, ponding and water logging, and water pollution.                                                | that it is their responsibility to verify the suitability of all material sources and to obtain the approval of PMU and (iii) If additional quarries will be required after construction is started, inform construction contractor to obtain a written approval from PIU.                                                                                                                                                                                                                                                                                                                               |                                       | and permit for additional quarry sites if necessary.          | contractual terms                                                                                                                                                                                      |
| Consents, permits, clearances, NOCs, etc. | Failure to obtain necessary consents, permits, NOCs, etc. can result to design revisions and/or stoppage of works | (i) Obtain all necessary consents (including CTE for STP from RSPCB), permits, clearance, NOCs, etc. prior to award of civil works. Following consents are required-<br>Tree cutting- local authority<br>Storage, handling and transport of hazardous materials- RSPCB<br>Sand mining, quarries, borrow areas- Department of mines and Geology<br>Traffic diversion/road cutting- local authority, traffic police<br>(ii) Ensure that all necessary approvals for construction to be obtained by contractor are in place before start of construction<br>(iii) Acknowledge in writing and provide report | DBO Contractor and PIU and Consultant | Incorporated in final design and communicated to contractors. | No cost required. Cost of obtaining all consents, permits, clearance, NOCs, etc. prior to start of civil works responsibility of PIU.<br><br>Mitigation measures are part of TOR of PIU and Consultant |

| Field                                      | Anticipated Impact                                                                               | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Responsible for Implementation | Monitoring of Mitigation | Cost and Source of Funds |
|--------------------------------------------|--------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------|--------------------------|
|                                            |                                                                                                  | on compliance all obtained consents, permits, clearance, NOCs, etc.<br>(iv) Include in detailed design drawings and documents all conditions and provisions if necessary                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                |                          |                          |
| Asbestos materials in existing PHED campus | Health impacts due to air borne asbestos if handled unsafely, cut, drilled or broken into pieces | (i) Coordinate and provide support to the asbestos management service provider on the requirement of sampling, testing and disposing existing asbestos materials<br>(ii) Coordinate and implement the the construction of the temporary storage per specification of the asbestos management service provider<br>(iii) Provide support to the asbestos management service provider supervising the removal, transport, disposal and documentation of the asbestos materials<br>(iv) Conduct awareness workshops and trainings to stakeholders on the risks of the asbestos materials<br>Maintain records of | DBO Contractor / PIU           | PMU                      | Project costs            |



| Field | Anticipated Impact | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                | Responsible for Implementation | Monitoring of Mitigation | Cost and Source of Funds |
|-------|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------|--------------------------|
|       |                    | asbestos materials inventory<br>(v) Ensure that handling and disposal of asbestos materials are carried out by specially trained service provider/s following Government of India requirements, or in their absence, internationally recognized procedures<br>(vi) Refer to the requirements of the Asbestos Management Plan (Appendix 20) and instructions of the Asbestos Expert |                                |                          |                          |

**Table 16: Environmental Management Plan of Anticipated Impacts during Construction**

| Field              | Anticipated Impact                                             | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                      | Responsible for Mitigation | Monitoring of Mitigation                                                                                                                                           | Cost and Source of Funds                                                                                                                    |
|--------------------|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| EMP Implementation | Irreversible impact to the environment, workers, and community | (i) Contractor is required to depute a qualified and experienced EHS officer/supervisor for monitoring of EMP implementation measures<br>(ii) Project manager and all key workers will be required to undergo EMP implementation including spoils management, Standard operating procedures (SOP) for construction works; occupational health and safety (OH andS), core labor laws, applicable environmental laws, etc. | Construction Contractor    | (i) Certificate of Completion (Safeguards Compliance Orientation)<br>(ii) Posting of Certification of Completion at worksites<br>(iii) Posting of EMP at worksites | Cost of EMP Implementation<br>Orientation Training to contractor is responsibility of PMU.<br><br>Other costs responsibility of contractor. |
| Air Quality        | Emissions from construction vehicles,                          | (i) Plan the work sites properly, and demarcate the sites for stockpiling of, soils, gravel, and                                                                                                                                                                                                                                                                                                                         | Construction Contractor    | (i) Location of stockpiles;<br>(ii) Complaints from                                                                                                                | Cost for implementation of mitigation measures                                                                                              |

| Field | Anticipated Impact                                                                                                                                                                                                                       | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Responsible for Mitigation | Monitoring of Mitigation                                                                                                                                                                                                   | Cost and Source of Funds      |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
|       | equipment, and machinery used for installation of pipelines resulting to dusts and increase in concentration of vehicle-related pollutants such as carbon monoxide, sulfur oxides, particulate matter, nitrous oxides, and hydrocarbons. | <p>other construction materials away from the traffic, vehicle, general worker movement to avoid disturbance of loose materials</p> <p>(ii) Damp down exposed soil and any stockpiled material on site by water sprinkling;</p> <p>(iii) Use tarpaulins to cover sand and other loose material when transported by trucks;</p> <p>(iv) Clean wheels and undercarriage of haul trucks prior to leaving construction site</p> <p>(v) Don't allow access in the work area except workers to limit soil disturbance and prevent access by barricading and security personnel</p> <p>(vi) Fit all heavy equipment and machinery with air pollution control devices which are operating correctly</p> <p>contractor's vehicles and equipment should compulsorily have PUC and submit to PIU before deployment at site</p> <p>(vii) Obtain, CTE and CTO for batching plant, hot mix plant, crushers etc. if specifically established for this project.</p> <p>(viii) If contractor procures any material (such as ready mix concrete, asphalt/macadam, aggregates etc.,) from third party agencies, contractor shall ensure that such agencies have all necessary clearances / permissions as required under the</p> |                            | <p>sensitive receptors;</p> <p>(iii) Heavy equipment and machinery with air pollution control devices;</p> <p>(iv) Certification that vehicles are compliant with Air Act</p> <p>(v) Reports of air quality monitoring</p> | responsibility of contractor. |

| Field                 | Anticipated Impact                                                                                                                                                                             | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Responsible for Mitigation | Monitoring of Mitigation                                                                                                                                                                                                                                                                                                                                              | Cost and Source of Funds                                                     |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
|                       |                                                                                                                                                                                                | law; these include CTE/CTO from RSPCB, environmental clearance, etc.; contractor shall collect the copy of these certificates and submit to PIU; PIU will approve the source only after all the certificates are submitted<br>(ix) Conduct air quality monitoring according to the Environmental Management Plan (EMP).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                            |                                                                                                                                                                                                                                                                                                                                                                       |                                                                              |
| Surface water quality | Works in rains/<br>Mobilization of settled silt materials, and chemical contamination from fuels and lubricants during installation of pipelines can contaminate nearby surface water quality. | (i) Prepare and implement a spoils management plan<br>(ii) Avoid stockpiling of earth fill especially during the monsoon season unless covered by tarpaulins or plastic sheets;<br>(iii) Prioritize re-use of excess spoils and materials in the construction works. If spoils will be disposed, consult with PIU on designated disposal areas;<br>(iv) Inspect all the drainage at construction site/construction camp/labor camp etc. and clear all the drainage lines so that no water stagnation/flooding may occur during heavy rainfall<br>(v) As for a possible avoid trench works and excavation works (pipe laying) during monsoon season to avoid any water logging and accident due to it<br>(vi) If open trenches are not avoidable during monsoon, keep ready all the mitigations measures to avoid water logging such as dewatering pumps and sufficient | Construction Contractor    | (i) Areas for stockpiles, storage of fuels and lubricants and waste materials;<br>(ii) Number of silt traps installed along trenches leading to water bodies;<br>(iii) Records of surface water quality inspection;<br>(iv) Effectiveness of water management measures;<br>(v) No visible degradation to nearby drainages, nallahs or water bodies due to civil works | Cost for implementation of mitigation measures responsibility of contractor. |

| Field        | Anticipated Impact                                                                                                               | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Responsible for Mitigation | Monitoring of Mitigation                                                                                                                                                                                          | Cost and Source of Funds                                                     |
|--------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
|              |                                                                                                                                  | <p>pipes, traffic assistance, barricades etc.</p> <p>(vii) Inspect and verify all the emergency measures and emergency control system before start of monsoon, keep the emergency response committee on high alert during monsoon/heavy rain fall</p> <p>(ix) Install temporary silt traps or sedimentation basins along the drainage leading to the water bodies;</p> <p>(x) Place storage areas for fuels and lubricants away from any drainage leading to water bodies;</p> <p>(xi) Dispose any wastes generated by construction activities in designated sites; and</p> <p>(xii) Conduct surface quality inspection according to the Environmental Management Plan (EMP).</p> |                            |                                                                                                                                                                                                                   |                                                                              |
| Noise Levels | Increase in noise level due to earth-moving and excavation equipment, and the transportation of equipment, materials, and people | <p>(i) Plan activities in consultation with PIU/Consultant so that activities with the greatest potential to generate noise are conducted during periods of the day which will result in least disturbance;</p> <p>(ii) Horns should not be used unless it is necessary to warn other road users or animals of the vehicle's approach;</p> <p>(iii) Minimize noise from construction equipment by using vehicle silencers, fitting jackhammers with noise-reducing mufflers, and portable street</p>                                                                                                                                                                              | Construction Contractor    | <p>(i) Complaints from sensitive receptors;</p> <p>(ii) Use of silencers in noise-producing equipment and sound barriers;</p> <p>(iii) Equivalent day and nighttime noise levels (see Appendix 6 of this IEE)</p> | Cost for implementation of mitigation measures responsibility of contractor. |

| Field                                  | Anticipated Impact                                                                                                                                                                                              | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Responsible for Mitigation | Monitoring of Mitigation                                                                                                                                                                                                                                                         | Cost and Source of Funds                                                     |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
|                                        |                                                                                                                                                                                                                 | barriers the sound impact to surrounding sensitive receptor; and<br>(iv) Maintain maximum sound levels not exceeding 80 decibels (dBA) when measured at a distance of 10 m or more from the vehicle/s.<br>(v) Periodical monitoring of noise quality as per EMP                                                                                                                                                                                                                                                                                                                                                                                                                                                |                            |                                                                                                                                                                                                                                                                                  |                                                                              |
| Landscape and aesthetics               | Impacts due to excess excavated earth, excess construction materials, and solid waste such as removed concrete, wood, packaging materials, empty containers, spoils, oils, lubricants, and other similar items. | (i) Prepare and implement spoils management plan (Appendix 21);<br>(ii) Avoid stockpiling of excess excavated soils;<br>(iii) Coordinate with ULB/PIU for beneficial uses of excess excavated soils or immediately dispose to designated areas;<br>(iv) Recover used oil and lubricants and reuse or remove from the sites;<br>(v) Manage solid waste according to the following preference hierarchy: reuse, recycling and disposal to designated areas;<br>(vi) Remove all wreckage, rubbish, or temporary structures which are no longer required; and<br>(vii) Request PIU to report in writing that the necessary environmental restoration work has been adequately performed before acceptance of work. | Construction Contractor    | (i) Complaints from sensitive receptors;<br>(ii) Worksite clear of hazardous wastes such as oil/fuel<br>(iii) Worksite clear of any excess excavated earth, excess construction materials, and solid waste such as removed concrete, wood, packaging materials, empty containers | Cost for implementation of mitigation measures responsibility of contractor. |
| Existing Infrastructure and Facilities | Disruption of service and damage to existing infrastructure at specified project location                                                                                                                       | (i) Obtain from PIU the list of affected utilities and operators if any;<br>(ii) Prepare a contingency plan to include actions to be done in case of unintentional interruption of                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Construction Contractor    | Existing Utilities Contingency Plan                                                                                                                                                                                                                                              | Cost for implementation of mitigation measures responsibility of contractor. |

| Field                              | Anticipated Impact                                                  | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Responsible for Mitigation | Monitoring of Mitigation                                                                                                                                                                                                   | Cost and Source of Funds                                                     |
|------------------------------------|---------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
|                                    |                                                                     | service                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                            |                                                                                                                                                                                                                            |                                                                              |
| Ecological Resources – Terrestrial | Loss of vegetation and tree cover                                   | (i) Minimize removal of vegetation and disallow cutting of trees; (ii) If tree-removal will be required, obtain tree-cutting permit from the concerned department; and (iii) Plant three native trees for every one that is removed as per RUDSICO-EAP Circular.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Construction Contractor    | PIU to report in writing the no of trees cut and planted.                                                                                                                                                                  | Cost for implementation of mitigation measures responsibility of contractor. |
| Land use                           | Environmental Issues due to land use change                         | The impact due to change in land use will be negligible due to this project.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Not applicable             | Not applicable                                                                                                                                                                                                             | Not applicable                                                               |
| Accessibility                      | Traffic problems and conflicts near project locations and haul road | i) Plan water and sewer line works to minimize traffic disturbance / blockades; as the both water and sewer lines are to be laid in all the roads and streets in the town, work planning is crucial to minimize the inconvenience to public due to repeated excavations<br>(ii) Prepare and implement a Traffic Management Plan (Appendix 22)<br>(ii) Duly consider and select sections for trenchless method of pipelaying based on traffic conditions<br>(iii) Plan transportation routes so that heavy vehicles do not use narrow local roads, except in the immediate vicinity of delivery sites;<br>(iv) Schedule transport and hauling activities during non-peak hours;<br>(v) Locate entry and exit points in areas where there is low potential for traffic congestion;<br>(vi) Keep the site free from all | Construction Contractor    | (i) Traffic route during construction works including number of permanent signage, barricades and flagmen on worksite;<br>(ii) Complaints from sensitive receptors;<br>(iii) Number of signage placed at project location. | Cost for implementation of mitigation measures responsibility of contractor. |

| Field                    | Anticipated Impact                                           | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Responsible for Mitigation | Monitoring of Mitigation                                                                                                                                                  | Cost and Source of Funds                                                     |
|--------------------------|--------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
|                          |                                                              | <p>unnecessary obstructions;</p> <p>(vii) Drive vehicles in a considerate manner;</p> <p>(viii) Coordinate with Traffic Police for temporary road diversions and with for provision of traffic aids if transportation activities cannot be avoided during peak hours;</p> <p>(ix) Notify affected sensitive receptors 1-week in advance by providing sign boards informing nature and duration of construction works and contact numbers for concerns/complaints.</p> <p>(x) Plan and execute the work in such a way that the period of disturbance/ loss of access is minimum.</p> <p>(xi) Provide pedestrian access in all the locations until normalcy is restored. Provide wooden/metal planks over the open trenches at each house to maintain the access.</p> |                            |                                                                                                                                                                           |                                                                              |
| Socio-Economic – Income. | Impede the access of residents and customers to nearby shops | <p>(i) Prepare and implement spoils management plan (Appendix 21). Contractor to Implement RP and to follow mitigation measures prescribed</p> <p>(ii) Leave spaces for access between mounds of soil;</p> <p>(ii) Provide walkways and metal sheets where required for people;</p> <p>(iii) Increase workforce in front of critical areas such as institutions, place of worship, business establishment, hospitals, and schools;</p>                                                                                                                                                                                                                                                                                                                              | Construction Contractor    | <p>(i) Complaints from sensitive receptors;</p> <p>(ii) Spoils management plan</p> <p>(iii) Number of walkways, signage, and metal sheets placed at project location.</p> | Cost for implementation of mitigation measures responsibility of contractor. |



| Field                          | Anticipated Impact                                               | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                        | Responsible for Mitigation | Monitoring of Mitigation                                                                                                                                               | Cost and Source of Funds                                                     |
|--------------------------------|------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
|                                |                                                                  | <p>(iv) Consult businesses and institutions regarding operating hours and factoring this in work schedules; and</p> <p>(v) Provide sign boards for pedestrians to inform nature and duration of construction works and contact numbers for concerns/complaints.</p> <p>(vi) Notify community/ water users in advance about likely interruptions in water supply.</p> <p>(vii) Provide alternate sources of clean water until water supply is restored.</p> |                            |                                                                                                                                                                        |                                                                              |
| Socio-Economic - Employment    | Generation of temporary employment and increase in local revenue | <p>(i) Employ local labour force, or to the maximum extent possible</p> <p>(ii) Comply with labor laws</p>                                                                                                                                                                                                                                                                                                                                                 | Construction Contractor    | <p>(i) Employment records;</p> <p>(ii) Records of sources of materials</p> <p>(iii) Compliance to labor laws (see Appendix 8 of this IEE)</p>                          | Cost for implementation of mitigation measures responsibility of contractor. |
| Occupational Health and Safety | Occupational hazards which can arise during work                 | <p>(i) Comply with all national, state and local core labor laws (see Appendix 8 of this IEE); Following best practice health and safety guidelines: IFC's General EHS Guidelines<sup>36</sup> and Sector Specific (Water and Sanitation) Guidelines<sup>37</sup></p> <p>(ii) Develop and implement site-</p>                                                                                                                                              | Construction Contractor    | <p>(i) Site-specific OH and S Plan;</p> <p>(ii) Equipped first-aid stations;</p> <p>(iii) Medical insurance coverage for workers;</p> <p>(iv) Number of accidents;</p> | Cost for implementation of mitigation measures responsibility of contractor. |

<sup>36</sup><https://www.ifc.org/wps/wcm/connect/554e8d80488658e4b76af76a6515bb18/Final%2B-%2BGeneral%2BEHS%2BGuidelines.pdf?MOD=AJPERES>

<sup>37</sup> <https://www.ifc.org/wps/wcm/connect/e22c050048855ae0875cd76a6515bb18/Final%2B-%2BWater%2Band%2BSanitation.pdf?MOD=AJPERES>

| Field | Anticipated Impact | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Responsible for Mitigation | Monitoring of Mitigation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Cost and Source of Funds |
|-------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
|       |                    | <p>specific occupational health and safety (OH andS) Plan which will include measures such as: (a) excluding public from the site; (b) ensuring all workers are provided with and use personal protective equipment like helmet, gumboot, safety belt, gloves, nose musk and ear plugs; (c) OH andS Training for all site personnel; (d) documented procedures to be followed for all site activities; and (e) documentation of work-related accidents;</p> <p>(iii) Conduct work in confine spaces, trenches, and at height with suitable precautions and using standards and safe construction methods; do not adopt adhoc methods; all trenches deeper than 1.5 m shall be provided with safety shoring/braces; and avoid open cutting method for trenches deeper than 3.5 m by adopting trenchless technology</p> <p>(iv) Ensure that qualified first aid can be provided at all times. Equipped first-aid stations shall be easily accessible throughout the site;</p> <p>(v) Provide medical insurance coverage for workers;</p> <p>(vi) Secure all installations from unauthorized intrusion and accident risks;</p> <p>(vii) The project area experiences extreme temperature during summer months of April and May,</p> |                            | <p>(v) Supplies of potable drinking water;</p> <p>(vi) Clean eating areas where workers are not exposed to hazardous or noxious substances;</p> <p>(vii) record of H andS orientation trainings</p> <p>(viii) personal protective equipment;</p> <p>(ix) % of moving equipment outfitted with audible back-up alarms;</p> <p>(xi) permanent sign boards for hazardous areas such as energized electrical devices and lines, service rooms housing high voltage equipment, and areas for storage and disposal.</p> <p>(xii) Compliance to core labor laws (see Appendix 8 of this IEE)</p> |                          |

| Field | Anticipated Impact | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Responsible for Mitigation | Monitoring of Mitigation | Cost and Source of Funds |
|-------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|--------------------------|--------------------------|
|       |                    | <p>which may affect the health of workers engaged in construction work. Contractor should take necessary measures during summers including the following:</p> <p>(a) work schedule should be adjusted to avoid peak temperature hours (12 – 3 PM); (b) provide appropriate shade near the workplace; allow periodic resting and provide adequate water, and (c) provide necessary medicine and facilities to take care of dehydration related health issues</p> <p>(viii) Provide supplies of potable drinking water;</p> <p>(vi) Provide clean eating areas where workers are not exposed to hazardous or noxious substances;</p> <p>(ix) Provide H andS orientation training to all new workers to ensure that they are apprised of the basic site rules of work at the site, personal protective protection, and preventing injuring to fellow workers;</p> <p>(x) Provide visitor orientation if visitors to the site can gain access to areas where hazardous conditions or substances may be present. Ensure also that visitor/s do not enter hazard areas unescorted;</p> <p>(xi) Ensure the visibility of workers through their use of high visibility vests when working in or walking through heavy equipment operating areas;</p> |                            |                          |                          |

| Field                                        | Anticipated Impact                                                           | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Responsible for Mitigation | Monitoring of Mitigation                                                          | Cost and Source of Funds                                                     |
|----------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------|
|                                              |                                                                              | <p>(xii) Ensure moving equipment is outfitted with audible back-up alarms;</p> <p>(xiii) Mark and provide sign boards for hazardous areas such as energized electrical devices and lines, service rooms housing high voltage equipment, and areas for storage and disposal. Signage shall be in accordance with international standards and be well known to, and easily understood by workers, visitors, and the general public as appropriate;</p> <p>(xiv) Disallow worker exposure to noise level greater than 85 dBA for a duration of more than 8 hours per day without hearing protection. The use of hearing protection shall be enforced actively.</p> <p>(xv) Conduct regular health check-ups for workers</p> <p>(xvi) Provide periodical awareness camps and special trainings for workers for health issues and risks in construction sites</p> <p>(xviii) Provide proper solid and liquid waste management system in workers' campsite, separate from spoils and debris disposal, as their presence can add to existing waste volume at the project sites.</p> |                            |                                                                                   |                                                                              |
| Occupational and community health and safety | Hazardous working conditions due to presence of asbestos containing material | (i) implement the ACM Management Plan (AMP) that includes identification of hazards, the use of proper safety gear and disposal methods. Sample AMP is                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Construction Contractor    | (i) Asbestos management plan preparation and implementation<br>(iii) quantity and | Cost for implementation of mitigation measures responsibility of contractor. |

| Field                        | Anticipated Impact                                                                                                                                                                                                                           | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Responsible for Mitigation | Monitoring of Mitigation                                                            | Cost and Source of Funds                                                     |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
|                              | <p>/ AC Pipes in work sites: clearing, transfer and disposal; work in narrow streets, and interventions in existing AC pipelines</p> <p>Health impacts due to air borne asbestos if handled unsafely, cut, drilled or broken into pieces</p> | <p>provided in Appendix 20. Adhere to the workflow process suggested in Figure 20.</p> <p>(ii) Conduct awareness program on safety during the construction work</p> <p>(iii) Undertake the construction work stretch-wise; excavation, pipe laying and trench refilling should be completed on the same day</p> <p>(iv) Provide barricades, and deploy security personnel to ensure safe movement of people and also to prevent unnecessary entry and to avoid accidental fall into open trenches</p> <p>(v) Identify risk of intervention with existing AC pipes. If there is significant risk, implement the AMP strictly that includes identification of hazards, the use of proper safety gear and disposal methods.</p> <p>(vi) Appropriate actions as defined in the Asbestos Management Plan will have to be adhered to</p> <p>(vii) Maintain records of AC pipes as per the AMP</p> |                            | characteristics of asbestos containing material removed/handled and disposed safely |                                                                              |
| Community Health and Safety. | Traffic accidents and vehicle collision with pedestrians during material and waste transportation                                                                                                                                            | (i) Trench excavation and pipeline works shall be conducted in a safe manner; if the allowing public movement along the work sites (pedestrians or vehicles as the case may be) is likely to cause safety risks, movement should be blocked temporarily and work shall be conducted; in such areas, conducting night work or working in                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Construction Contractor    | <p>(i) Traffic Management Plan;</p> <p>(ii) Complaints from sensitive receptors</p> | Cost for implementation of mitigation measures responsibility of contractor. |

| Field                                                                                      | Anticipated Impact                                                                    | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Responsible for Mitigation | Monitoring of Mitigation                                 | Cost and Source of Funds                                                     |
|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------------------------------------------------------|------------------------------------------------------------------------------|
|                                                                                            |                                                                                       | <p>small stretches to avoid blockage of traffic/movement no more than few hours in due consultation with the local community and ULB shall be planned</p> <p>(ii) All trenches deeper than 1.5 m shall be provided with safety shoring/braces; and avoid open cutting method for trenches deeper than 3.5 m by adopting trenchless technology</p> <p>(iii) Survey the surrounding vulnerable buildings for likely issues in structural stability / differential settlement during the excavation works</p> <p>(iv) Provide prior information to the local people about the</p> <p>(v) Plan routes to avoid times of peak-pedestrian activities.</p> <p>(vi) Liaise with PIU/ULB in identifying high-risk areas on route cards/maps.</p> <p>(vii) Maintain regularly the vehicles and use of manufacturer-approved parts to minimize potentially serious accidents caused by equipment malfunction or premature failure.</p> <p>(viii) Provide road signs and flag persons to warn of on-going trenching activities.</p> |                            |                                                          |                                                                              |
| Safety of sensitive groups (children, elders etc.) and other pedestrians in narrow streets | Trench excavation in narrow streets will pose high risk to children and elders in the | <p>(i) Provide prior information to the local people about the nature and duration of work</p> <p>(ii) Conduct awareness program on safety during the</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Construction Contractor    | Complaints from neighborhood and monitoring of accidents | Cost for implementation of mitigation measures responsibility of contractor. |

| Field       | Anticipated Impact                                                                                                                            | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Responsible for Mitigation | Monitoring of Mitigation                                                          | Cost and Source of Funds |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------------------------------------------------------|--------------------------|
|             | locality                                                                                                                                      | <p>construction work</p> <p>(iii) Undertake the construction work stretch-wise; excavation, pipe laying and trench refilling should be completed on the same day</p> <p>(iv) Provide barricades, and deploy security personnel to ensure safe movement of people and also to prevent unnecessary entry and to avoid accidental fall into open trenches</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                            |                                                                                   |                          |
| Night Works | Public inconvenience due to traffic diversion, disturbance due to excessive noise and access loss, occupational health and safety issues etc. | <p>Prepare a night work protocol and obtain prior approval from PIU, and strictly implement and report on implementation of protocol during the workers;</p> <p>Contractors should have handheld noise level meter for measurement of noise during night hours</p> <p>Contractors should have handheld lux meter for the measurement of illumination during night hours</p> <p>Preferably electrical connection is available for running equipment otherwise soundproof/super silent Diesel Generator set should be available</p> <p>Sound level should not increase as prescribe by CPCB</p> <p>Illumination should be as prescribed in protocol</p> <p>As far as possible ready-mix concrete from batching plant to be used, otherwise the concrete should be prepared away from residential areas and brought to the site</p> <p>All the noisy activities like</p> | Contractor                 | Night work plan / protocol submitted by contractor and approved by PIU/Consultant | Contractor               |



| Field | Anticipated Impact | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Responsible for Mitigation | Monitoring of Mitigation | Cost and Source of Funds |
|-------|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|--------------------------|--------------------------|
|       |                    | <p>hammering, cutting, crushing, running of heavy equipment should be done in daytime and avoided in nighttime</p> <p>Workers engaged in night works should have adequate rest/sleep in daytime before start of night works</p> <p>Worker engaged for night works should have previous experience of night works and should be physically fit for such works including clear vision in night</p> <p>All the necessary provisions of traffic aids such as traffic signals, road signage, barricades, cautions boards, traffic diversion boards etc. should be available with fluorescent/retro-reflective arrangements</p> <p>Workers should be trained before start of night works about risks and hazards of night works and their mitigation measures and should be provided all the protective aids (PPEs) including fluorescent/retro-reflective vests</p> <p>Horns should not be permitted by equipment and vehicles</p> <p>Workers should not shout and create noise</p> <p>First aid and emergency vehicles should be available at site</p> <p>Emergency preparedness plan should be operative during night works</p> <p>Old persons and pregnant women and women having small kids should not work in night-time</p> |                            |                          |                          |

| Field | Anticipated Impact | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Responsible for Mitigation | Monitoring of Mitigation | Cost and Source of Funds |
|-------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|--------------------------|--------------------------|
|       |                    | <p>All the vehicles and equipment being used at night works should have adequate type of silencers/enclosures/mufflers to reduce noise</p> <p>All the vehicles should be checked for working head lamps, tail lamps, inner lights etc. before start of night works</p> <p>PIU/DSC site engineers and contractor's safety personnel should closely monitor the safety of works continuously and noise and illumination levels on hourly basis and maintain photographic and video graphic records as well as register the observations.</p> <p>Night works should be stopped early in the morning at least one hour before start of pedestrian/traffic movement</p> <p>After completion of night works all the site should be cleaned and maintained obstruction free for daytime movement of vehicles and pedestrians</p> <p>Drivers and workers should be alert and responsive during night works</p> <p>All the wages to workers working in night hours should be as per the applicable labour acts</p> <p>Avoid any nuisance which may create problems to nearby habitants and work peacefully during night hours</p> <p>Night works should not be conducted near hospitals and</p> |                            |                          |                          |

| Field                                    | Anticipated Impact                                                                                                           | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Responsible for Mitigation | Monitoring of Mitigation                                                                                | Cost and Source of Funds                                                     |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
|                                          |                                                                                                                              | during peak seasons such as peak tourist season, students' exam times etc.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                            |                                                                                                         |                                                                              |
| Work in narrow streets                   | will pose high risk to children and elders in the locality                                                                   | (i) Conduct awareness program on safety during the construction work<br>(ii) Undertake the construction work stretch-wise; excavation, pipe laying and trench refilling should be completed on the same day<br>(iii) Provide barricades, and deploy security personnel to ensure safe movement of people and also to prevent unnecessary entry and to avoid accidental fall into open trenches<br>(iv) Trench excavation and pipeline works shall be conducted in a safe manner; if the allowing public movement along the work sites (pedestrians or vehicles as the case may be) is likely to cause safety risks, movement should be blocked temporarily and work shall be conducted; in such areas, conducting night work or working in small stretches to avoid blockage of traffic/movement no more than few hours in due consultation with the local community and ULB shall be planned |                            |                                                                                                         | responsibility of contractor.                                                |
| Construction camps and worker facilities | Temporary air and noise pollution from machine operation, water pollution from storage and use of fuels, oils, solvents, and | (i) Consult with PIU before locating project offices, sheds, and construction plants;<br>(ii) Minimize removal of vegetation and disallow cutting of trees;<br>(iii) Provide drinking water, water for other uses, and sanitation facilities for employees;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Construction Contractor    | (i) Complaints from sensitive receptors;<br>(ii) Drinking water and sanitation facilities for employees | Cost for implementation of mitigation measures responsibility of contractor. |

| Field | Anticipated Impact                                                  | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Responsible for Mitigation | Monitoring of Mitigation | Cost and Source of Funds |
|-------|---------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|--------------------------|--------------------------|
|       | lubricants<br><br>Unsanitary and poor living conditions for workers | (iv) Provided temporary rest and eating area at all work sites<br>(v) Ensure conditions of livability at work camps are always maintained at the highest standards possible; living quarters and construction camps shall be provided with standard materials (as far as possible to use portable ready to fit-in reusable cabins with proper ventilation); thatched huts, and facilities constructed with materials like GI sheets, tarpaulins, etc., shall not be used as accommodation for workers; accommodation shall meet the IFC standards for workers accommodation which include: provision of safe housing, availability of electricity, plumbing, water and sanitation, adequate fire protection and dormitory/room facilities; accommodation shall be in the range from 10 to 12.5 cubic meters (volume) or 4 to 5.5 square meters (surface) per worker, a minimum ceiling height of 2.10 meters; a reasonable number of workers are allowed to share the same room – (standards range from 2 to 8 workers); workers with accompanying families shall be provided with a proper and safe accommodation (IFC benchmark standards for workers accommodation is provided in Appendix 23)<br>(vi) Train employees in the storage |                            |                          |                          |

| Field                         | Anticipated Impact                                    | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                        | Responsible for Mitigation | Monitoring of Mitigation  | Cost and Source of Funds                                                     |
|-------------------------------|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------|------------------------------------------------------------------------------|
|                               |                                                       | and handling of materials which can potentially cause soil contamination;<br>(vii) Recover used oil and lubricants and reuse or remove from the site;<br>(viii) Manage solid waste according to the preference hierarchy: reuse, recycling and disposal to designated areas;<br>(ix) Ensure unauthorized persons specially children are not allowed in any worksite at any given time.                                                                     |                            |                           |                                                                              |
| Social and Cultural Resources | Risk of archaeological chance finds                   | (i) Strictly follow the protocol for chance finds in any excavation work;<br>(ii) Create awareness among the workers, supervisors and engineers about the chance finds during excavation work<br>(iii) Stop work immediately to allow further investigation if any finds are suspected;<br>(iv) Inform local Archeological Department / Museum office if a find is suspected and take any action, they require to ensure its removal or protection in situ | Construction Contractor    | Records of chance finds   | Cost for implementation of mitigation measures responsibility of contractor. |
| Monsoon preparedness          | Disruption of utilities and water logging in trenches | (i) As for a possible avoid trench works and excavation works (pipe laying) during monsoon season to avoid any water logging and accident due to it<br>(ii) if open trenches are not avoidable during monsoon, keep ready all the mitigations measures to avoid water logging such as dewatering pumps and sufficient                                                                                                                                      | Construction Contractor    | Monsoon preparedness plan | Cost for implementation of mitigation measures responsibility of contractor. |

| Field                                   | Anticipated Impact                                          | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Responsible for Mitigation | Monitoring of Mitigation                                                                                                                                                                                                                                                            | Cost and Source of Funds                                                        |
|-----------------------------------------|-------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
|                                         |                                                             | pipes, traffic assistance, barricades etc.<br>(iii) keep emergency response system ready before monsoon/heavy rain fall                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                            |                                                                                                                                                                                                                                                                                     |                                                                                 |
| Submission of EMP implementation report | Unsatisfactory compliance to EMP                            | (i) Appointment of supervisor to ensure EMP implementation<br>(ii) Timely submission of monitoring reports including pictures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Construction contractor    | Availability and competency of appointed supervisor<br>Monthly report                                                                                                                                                                                                               | Cost for implementation of mitigation measures<br>responsibility of contractor. |
| Post-construction clean-up              | Damage due to debris, spoils, excess construction materials | (i) Remove all spoils wreckage, rubbish, or temporary structures (such as buildings, shelters, and latrines) which are no longer required; and<br>(ii) All excavated roads shall be reinstated to original condition.<br>(iii) All disrupted utilities restored<br>(iv) All affected structures rehabilitated/compensated<br>(v) The area that previously housed the construction camp is to be checked for spills of substances such as oil, paint, etc. and these shall be cleaned up.<br>(vi) All hardened surfaces within the construction camp area shall be ripped, all imported materials removed, and the area shall be top soiled and re-grassed using the guidelines set out in the re-vegetation specification that forms part of this document.<br>(vii) The contractor must arrange the cancellation of all temporary services.<br>(viii) Request PIU to report in writing that worksites and camps | Construction Contractor    | PIU/Consultant report in writing that (i) worksite is restored to original conditions; (ii) camp has been vacated and restored to pre-project conditions; (iii) all construction related structures not relevant to O andM are removed; and (iv) worksite clean-up is satisfactory. | Cost for implementation of mitigation measures<br>responsibility of contractor. |

| Field | Anticipated Impact | Mitigation Measures                                                                 | Responsible for Mitigation | Monitoring of Mitigation | Cost and Source of Funds |
|-------|--------------------|-------------------------------------------------------------------------------------|----------------------------|--------------------------|--------------------------|
|       |                    | have been vacated and restored to pre-project conditions before acceptance of work. |                            |                          |                          |

**Table 17: Environmental Management Plan of Anticipated Impacts during Operation**

| Field                                                                        | Anticipated Impact                               | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Responsible for Mitigation                            | Monitoring of Mitigation  | Cost and Source of Funds   |
|------------------------------------------------------------------------------|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|---------------------------|----------------------------|
| Sewerage system operation: treatment discharge of treated wastewater, sludge | Environmental and health issues due to operation | <p>(i) Ensure that treated wastewater meets the established discharge standards all times; Conduct regular wastewater quality monitoring (at inlet and at outlet of STP) to ensure that the treated effluent quality complies with design standards;</p> <p>(ii) Conduct baseline water quality assessment of receiving water body prior to start of operation</p> <p>(iii) Ensure implementation of Reuse Plan, and ensure intended quality for each direct reuse</p> <p>(iv) Assess composition and characteristics of sludge from the first batch operation at the initial phases, and confirm the handling, management and disposal/reuse actions suggested in the management plan</p> <p>(v) Conduct periodic testing of dried sludge/compost to check presence of heavy metals and confirming the concentrations to use as compost as specified in the Standards for Composting, Schedule II A, Solid Waste Management Rules, 2016, FCO = Fertilizer Control Order, 1985, amendments in 2009 and 2013. It shall not be used for food crops.</p> | O and M contractor for 10 years and then Nagar Palika | Sardarshahar Nagar Palika | O and M cost of contractor |



| Field | Anticipated Impact | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Responsible for Mitigation | Monitoring of Mitigation | Cost and Source of Funds |
|-------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|--------------------------|--------------------------|
|       |                    | <p>(vi) Ensure valid consent to operate (CTO) from RSPCB for operation of STP</p> <p>(vii) Ensure that all conditions/standards prescribed by RSPCB are complied duly</p> <p>(viii) Ensure that chlorinator facility is operated only by trained staff and as per the standard operating procedures; in case of any accident and/or maintenance activity, ensure that the staff follows documented procedures only</p> <p>(ix) Implement Emergency Response System (ERS) for the chlorine leakage; Guidelines and Emergency plan for handling and storing chlorine is attached as Appendix 24</p> <p>(x) Ensure proper knowledge transfer, hands-on training to municipal staff engaged in STP operation has been provided by contractor prior to handover of facility;</p> <p>(xi) Operate and maintain the facility following standard operating procedures of operational manual;</p> <p>(xii) Undertake preventive and periodic maintenance activities as required;</p> <p>(xiii) Conduct periodic training to workers; ensure that all safety apparatus at STP including personal protection equipment are in good condition all times; and are at easily accessible and identifiable place; periodically check the equipment, and conduct mock drills to deal with emergency situations;</p> <p>(xiv) No wastewater from industrial premises (including domestic wastewater)</p> |                            |                          |                          |

| Field                                                | Anticipated Impact                                                | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Responsible for Mitigation                            | Monitoring of Mitigation  | Cost and Source of Funds   |
|------------------------------------------------------|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|---------------------------|----------------------------|
|                                                      |                                                                   | <p>shall be allowed to dispose into municipal sewers; monitor regularly and ensure that there is no illegal discharge through manholes or inspection chambers; conduct public awareness programs; in coordination with RSPCB:</p> <p>(xv) Conventional and centralized water treatment that use filtration and disinfection that inactivates disease-causing vectors</p> <p>(xvi) Final disinfection step considered if treatment plant technologies are not able to destroy pathogens and remove viruses</p> <p>(xvii) Workers should wear appropriate PPE which includes protective outerwear, gloves, boots, goggles or a face shield and a mask</p> <p>(xviii) Perform hand hygiene frequently, avoid touching eyes, nose, mouth with unwashed hands</p> |                                                       |                           |                            |
| Sewerage system operation: collection and conveyance | Environmental and health issues due to operation of sewer network | <p>(i) Establish regular maintenance program, including:</p> <ul style="list-style-type: none"> <li>Regular cleaning of grit chambers and sewer lines to remove grease, grit, and other debris that may lead to sewer backups. Cleaning should be conducted more frequently for problem areas.</li> <li>Inspection of the condition of sanitary sewer structures and identifying areas that need repair or maintenance. Items to note may include cracked/deteriorating pipes; leaking joints or seals at manhole; frequent line blockages; lines that generally flow at or near capacity; and suspected infiltration or exfiltration; and</li> <li>Monitoring of sewer flow to</li> </ul>                                                                   | O and M contractor for 10 years and then Nagar Palika | Sardarshahar Nagar Palika | O and M cost of contractor |

| Field | Anticipated Impact | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Responsible for Mitigation | Monitoring of Mitigation | Cost and Source of Funds |
|-------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|--------------------------|--------------------------|
|       |                    | <p>identify potential inflows and outflows</p> <ul style="list-style-type: none"> <li>• Conduct repairs on priority based on the nature and severity of the problem. Immediate clearing of blockage or repair is warranted where an overflow is currently occurring or for urgent problems that may cause an imminent overflow (e.g. pump station failures, sewer line ruptures, or sewer line blockages);</li> <li>(ii) Review previous sewer maintenance records to help identify “hot spots” or areas with frequent maintenance problems and locations of potential system failure, and conduct preventative maintenance, rehabilitation, or replacement of lines as needed;</li> <li>(iii) When a spill, leak, and/or overflow occurs, keep sewage from entering the storm drain system by covering or blocking storm drain inlets or by containing and diverting the sewage away from open channels and other storm drain facilities (using sandbags, inflatable dams, etc.). Remove the sewage using vacuum equipment or use other measures to divert it back to the sanitary sewer system.</li> <li>(iv) Prohibit/prevent disposal of wastewater/effluent from industrial units in the sewers; ensure regular checking to ensure no illegal entry of industrial wastewater into sewers</li> <li>(v) Develop an Emergency Response System for the sewerage system leaks, burst and overflows, etc.</li> <li>(vi) Provide necessary health and safety training to the staff</li> </ul> |                            |                          |                          |

| Field | Anticipated Impact | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Responsible for Mitigation | Monitoring of Mitigation | Cost and Source of Funds |
|-------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|--------------------------|--------------------------|
|       |                    | <p>(vii) Provide all necessary personnel protection equipment</p> <p>(viii) During cleaning/clearing of manholes and sewer lines great precautions should be taken for the safety of workers conducting such works.</p> <ul style="list-style-type: none"> <li>• As far as possible use remote / CCTV mechanism to identify/detect the problems in sewers and do not engage persons for this purpose</li> <li>• As far as possible use mechanized cleaning of manholes and sewers by using modern techniques and machines and do not engage persons for this purpose</li> <li>• Ensure that maintenance staff and supervisors understand the risks; provide proper instructions, training and supervision.</li> <li>• Use gas detector to detect any hazardous or inflammable gas in confined areas like sewers /manholes prior to maintenance process</li> <li>• Provide suitable personal protective equipment that may include waterproof / abrasion-resistant gloves, footwear, eye and respiratory protection. Face visors are particularly effective against splashes. Equipment selection and a proper system for inspection and maintenance are important.</li> <li>• Provide adequate welfare facilities, including clean water, soap, nail brushes, disposable paper towels, and where heavy contamination is foreseeable, showers.</li> <li>• For remote locations portable</li> </ul> |                            |                          |                          |

| Field                                                                                                                          | Anticipated Impact                                     | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Responsible for Mitigation                            | Monitoring of Mitigation  | Cost and Source of Funds   |
|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|---------------------------|----------------------------|
|                                                                                                                                |                                                        | <p>welfare facilities should be provided.</p> <ul style="list-style-type: none"> <li>• Areas for storage of clean and contaminated equipment should be segregated and separate from eating facilities.</li> <li>• Provide adequate first-aid equipment, including clean water or sterile wipes for cleansing wounds, and a supply of sterile, waterproof, adhesive dressings.</li> <li>• Make effective arrangements for monitoring the health of staff.</li> <li>• Keep emergency preparedness plan ready before starting the work of sewage system cleaning</li> </ul> |                                                       |                           |                            |
| Repair and maintenance activities of water supply and sewerage Construction disturbances, nuisances, public and worker safety, | All work sites                                         | Implementation of dust control, noise control, traffic management, and safety measures. Site inspection checklist to review implementation is appended at Appendix 29.                                                                                                                                                                                                                                                                                                                                                                                                   | O and M contractor for 10 years and then Nagar Palika | Sardarshahar Nagar Palika | O and M cost of contractor |
| Asset management                                                                                                               | Reduction in NRW<br>Increased efficiency of the system | Preparation and implementation of O and M Manual                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | O and M contractor for 10 years and then Nagar Palika | Sardarshahar Nagar Palika | O and M cost of contractor |

**Table 18: Environmental Monitoring Plan for Construction Stage**

| <b>Monitoring field</b>                                      | <b>Monitoring location</b>                                                                                                                  | <b>Monitoring parameters</b>                                                                                                                                                                                       | <b>Frequency</b>                                                                     | <b>Responsibility</b>                                     | <b>Cost &amp; Source of Funds</b>                                           |
|--------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------------------------|
| Construction disturbances, nuisances, public & worker safety | All work sites                                                                                                                              | Implementation of dust control, noise control, traffic management, & safety measures. Site inspection checklist to review implementation is appended at Appendix 30                                                | Weekly during construction                                                           | Supervising staff, EHS officer and safeguards specialists | No costs required                                                           |
| Tree cutting                                                 | SPS, STP, Pipe laying, camps and PHED campus                                                                                                | Obtain permission from concerned authority for any tree cutting and plant trees in the ratio of 1:3 as per RUDSICO-EAP Circular                                                                                    | Weekly during construction                                                           | Supervising staff and safeguards specialist               | Contractors cost                                                            |
| Ambient air quality                                          | 8 locations (3 STP sites, 2 SPS sites, 1 PHED site, 1 pipe laying site and 1 at construction/workers camp/storage yard during construction) | PM <sub>10</sub> , PM <sub>2.5</sub> , NO <sub>2</sub> , SO <sub>2</sub> , CO                                                                                                                                      | Once before start of construction and quarterly (yearly 4-times) during construction | Contractor                                                | Cost for implementation of monitoring measures responsibility of contractor |
| Ambient noise                                                | 8 locations (3 STP sites, 2 SPS sites, 1 PHED site, 1 pipe laying site and 1 at construction/workers camp/storage yard during construction) | Day time and nighttime noise levels                                                                                                                                                                                | Once before start of construction and quarterly (yearly 4-times) during construction | Contractor                                                | Cost for implementation of monitoring measures responsibility of contractor |
| Soil quality                                                 | 7 locations (3 STP sites, 2 SPS sites, 1 PHED site, and 1 at construction/workers camp/storage yard during construction)                    | pH, Elect. Conductivity (at 25°C), Moisture (at 105°C), Texture (silt, clay, sand), Calcium (as CaO), Magnesium (as Mg), Permeability, Nitrogen (as N), Sodium (as Na), Phosphate (as PO <sub>4</sub> ), Potassium | Once before start of construction and quarterly (yearly 4-times) during construction | Contractor                                                | Cost for implementation of monitoring measures responsibility of contractor |

| Monitoring field                                                                    | Monitoring location                                                                                                        | Monitoring parameters                                                                                                                                                                          | Frequency                                                                            | Responsibility                                    | Cost & Source of Funds                                                                             |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------|----------------------------------------------------------------------------------------------------|
|                                                                                     |                                                                                                                            | (as K), Organic Matter, oil and grease                                                                                                                                                         |                                                                                      |                                                   |                                                                                                    |
| Ground Water quality                                                                | 7 locations (3 STP sites, 2 SPS sites, 1 PHED site, and 1 at construction/ workers camp/ storage yard during construction) | pH, TDS, Total Hardness, Zn, Chloride, Iron, Copper, DO, Manganese, Sulphate, Nitrate, Fluoride, Hg, Cadmium, Cr <sup>+6</sup> , Arsenic, Lead, Total Alkalinity, Phosphate, Phenolic compound | Once before start of construction and quarterly (yearly 4-times) during construction | Contractor                                        | Cost for implementation of monitoring measures responsibility of contractor                        |
| Surface Water quality                                                               | Surface water sources near to construction sites; workers' camp, material storage areas and waste disposal areas;          | pH, TDS, Total Hardness, Zn, Chloride, Iron, Copper, DO, Manganese, Sulphate, Nitrate, Fluoride, Hg, Cadmium, Cr <sup>+6</sup> , Arsenic, Lead, Total Alkalinity, Phosphate, Phenolic compound | Once before start of construction and quarterly (yearly 4-times) during construction | Contractor                                        | Cost for implementation of monitoring measures responsibility of contractor                        |
| Construction, Labour Camp, storage yard Management                                  | Construction, Labour Camp, storage yard Management                                                                         | As per EMP                                                                                                                                                                                     | Weekly                                                                               | EHS officer, Environment Specialist of consultant | contractor                                                                                         |
| Solid waste management                                                              | Construction, Labour Camp, storage yard Management                                                                         | As per EMP                                                                                                                                                                                     | Weekly                                                                               | EHS officer, Environment Specialist of consultant | contractor                                                                                         |
| Construction and demolition waste management                                        | All construction site                                                                                                      | As per EMP and applicable rules and regulations                                                                                                                                                | Weekly                                                                               | EHS officer, Environment Specialist of consultant | contractor                                                                                         |
| Consent to establish of STPs, batching plants, crusher, hot mix plant. DG sets etc. | STPs, batching plants, crusher, hot mix plants etc                                                                         | Consents are taken as per table 5& 6                                                                                                                                                           | Periodically                                                                         | EHS officer, Environment Specialist of consultant | No cost required for monitoring cost for obtaining CTE/CTO from PMU and for others from Contractor |



**Table 19: Environmental Monitoring Plan for Operations Stage**

| <b>Monitoring field</b>                              | <b>Monitoring location</b>                | <b>Monitoring parameters</b>                                                                                                                                                                                                                                                                                   | <b>Frequency</b> | <b>Responsibility</b>                             | <b>Cost &amp; Source of Funds</b> |
|------------------------------------------------------|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|---------------------------------------------------|-----------------------------------|
| Monitoring of raw sewage quality                     | Inlet of the STP                          | Suspended solids, pH, Temperature<br>Oil and grease, Total residual chlorine,<br>Ammonical nitrogen (as N), BOD, COD,<br>Nitrate Nitrogen<br>The values should be within the limit specified by STP design inlet values                                                                                        | Monthly once     | O&M contractor for 10 years and then Nagar Palika | O&M Contractor/ Nagar Palika      |
| Sludge quality (STP) and suitability as manure       | Dried sludge                              | Analysis for concentration of heavy metals and confirm that value are within the following limits (all units are in mg/kg dry basis except pH)<br>Arsenic - 10.00<br>Cadmium - 5.00<br>Chromium - 50.00<br>Copper- 300.00<br>Lead - 100.00<br>Mercury- 0.15<br>Nickel - 50.00<br>Zinc- 1000.00<br>PH - 5.5-8.5 | Yearly twice     | O&M contractor for 10 years and then Nagar Palika | O&M Contractor/ Nagar Palika      |
| Treated water quality                                | CWRs                                      | Parameters as per drinking water standards (IS 10500-2012)                                                                                                                                                                                                                                                     | Monthly once     | O&M contractor for 10 years and then Nagar Palika | O&M Contractor/ Nagar Palika      |
| Monitoring of quality of water supplied to consumers | Consumer end-random sampling in all zones | Parameters as per drinking water standards (IS 10500-2012)                                                                                                                                                                                                                                                     | Monthly once     | O&M contractor for 10 years and then Nagar Palika | O&M Contractor/ Nagar Palika      |
| Consent to operate (CTO) from RSPCB                  | STPs                                      | CTO should be renewed before expired                                                                                                                                                                                                                                                                           | As per RSPCB     | O&M contractor for 10 years and then Nagar Palika | O&M Contractor/ Nagar Palika      |
| Sludge quality (STP) and suitability as manure       | Dried sludge                              | Analysis for concentration of heavy metals and confirm that value are within the following limits (all units are in mg/kg dry basis except pH)<br>Arsenic - 10.00<br>Cadmium - 5.00<br>Chromium - 50.00                                                                                                        | Yearly twice     | O&M contractor for 10 years and then Nagar Palika | O&M Contractor/ Nagar Palika      |

| Monitoring field      | Monitoring location | Monitoring parameters                                                                               | Frequency           | Responsibility                                    | Cost & Source of Funds       |
|-----------------------|---------------------|-----------------------------------------------------------------------------------------------------|---------------------|---------------------------------------------------|------------------------------|
|                       |                     | Copper- 300.00<br>Lead - 100.00<br>Mercury- 0.15<br>Nickel - 50.00<br>Zinc- 1000.00<br>PH - 5.5-8.5 |                     |                                                   |                              |
| Treated water quality | CWRs                | Parameters as per drinking water standards (IS 10500-2012)                                          | Monthly once        | O&M contractor for 10 years and then Nagar Palika | O&M Contractor/ Nagar Palika |
| Reduction of NRW      | Pipe line networks  | As per RUDSICO-EAP norms                                                                            | Daily/when required | O&M Contractor                                    | DBO contractor Cost          |

## B. Institutional Requirements

254. The Local Self Government Department (LGSD) is the executing agency which will be responsible for the overall strategic guidance and ensure the compliance with ADB loan covenants. RUDSICO is the implementing agency responsible for the technical supervision and project implementation. The RUDSICO Board (under the chairmanship of the Honorable Minister), the LGSD and the City Level Monitoring Committees (CLMCs, under the chairmanship of their respective Commissioner / Executive Officer) is designed to monitor the project implementation. The Project Management Unit (PMU) is at state-level and headed by a dedicated Project Director. The Project Implementing Units (PIUs) have two zonal offices (1 in Jaipur and 1 in Jodhpur). Each zonal office will be headed by an Additional Chief Engineer. Urban Local Bodies (ULBs) will be the final custodian and user of the created infrastructure. As primary stakeholders, the ULBs will be involved and engaged in the day-to-day monitoring and implementation.

255. At the PMU level, the Project Director shall be supported by Additional Project Director (Chief Engineer-level) and a Chief Engineer, who shall then be supported by Dy Project Director and a Financial Advisor. There shall be one Project Officer for Social and another Project Officer for Environmental aspects of the project.

256. The PMU shall be supported by the Project Management and Capacity Building Consultants (PMCBC). The PMCBC shall manage preparation/vetting design documents, tendering of contracts, implementation of resettlement, environmental management and gender action plans; setting and managing project performance monitoring systems, planning and managing implementation of training and capacity building as well as institutional strengthening activities besides preparing reports as per ADB requirements. PMCBC shall engage a social safeguard specialist and environmental safeguard specialist at the PMU level for managing all social and environmental safeguard related support services as envisaged in its scope of work. They will be assisted by concerned field level safeguard support staffs of Construction Management and Supervision Consultants (CMSCs) and PIU.

257. PMCBC shall be joined by the following specialists to address site-specific environmental requirements as below:

- (i) Environment Specialist Consultant – responsibilities include the review and refinement of the IEEs and the EMPs and ensure inclusion in the bid documents and during construction, monitor the implementation of the EMPs and support in the reporting and documentation requirements.
- (ii) Asbestos Management Specialist – provides training and awareness on the risks and safe handling and management of asbestos-containing materials (ACMs) and to coordinate with the Asbestos Management Service Provider in the implementation of the Asbestos Management
- (iii) Heritage Management Specialist – provides guidance on the ADB SPS requirement on Physical Cultural Resources in the RSTDSP towns including the conduct of Heritage Impact Assessment, provides support on the statutory clearances to be obtained and the documentation and reporting on the implementation of mitigation measures
- (iv) Biodiversity Expert – provides guidance on the ADB SPS requirement on Biodiversity Conservation and Critical Habitat Assessment including the conduct preliminary screening (e.g. IBAT assessment reports), on-site verifications and consultations, recommend specific measures and provide supervisor support during the planning and construction periods
- (v) Architect - assists the team leader and structural expert for review and approval of all drawings from architectural and heritage perspective; review and approve the detailed architectural drawings prepared by the Contractor and promptly address any site-specific issues regarding architectural and heritage aspects.

258. There will be two zonal PIUs and a PIU at every town. PIUs at the town-level shall be headed by a Superintending Engineer/Executive Engineer, who shall work as Project Manager and shall sign the contract documents, manage the contract and disburse payments as Drawing and Disbursing Officer.

259. Construction Management and Supervision Consultants (CMSC) - 2 nos catering to Jaipur and Jodhpur units. They shall directly support PIUs in day to day contract management, construction supervision including quality management of ongoing works etc. This shall include work measurement, quantities, verification of bills of contractors etc. In compliance with the EMP, the CMSC shall develop a strategy to overcome the difficulties of construction/traffic management in narrow streets and also prepare detailed plans for detour of traffic during excavation for pipe laying. The CMSC will design and implement mechanism for coordination among all stakeholders such as traffic police, roads department, user committees, etc, for smooth construction execution. Adequate measures shall be taken for working near physical cultural resources involving close coordination with the Department of Archaeology. The CMSC will lead design of surveys and investigations required for the protection of archaeological sites / heritage areas and prepare Archaeological Impact Assessments, or other agreed upon document to be approved by the Department of Archaeology for the archaeologically sensitive locations.

260. Community Awareness and Public Participation Consultants (CAPPC) will closely work in the field (with PIUs) to facilitate creation of project awareness and ensuring public participation for all project works at the community level. This shall mainly involve house connections for water supply, sewerage and metering. CAPPC shall also undertake various IEC activities to promote and pursue health and hygiene among the communities.

261. **Safeguards Implementation Arrangements.** At PMU, there will be two dedicated Project Officers (i) Project Officer (Environment) and (ii) Project Officer (Social), who will


responsible for compliance with the environmental and social safeguards in program implementation. PO (Environment) will have overall responsibility in implementation of the RSTDSP program as per the Environmental Assessment and Review Framework (EARF) agreed between ADB and the government. At individual subproject level, PO will ensure that environmental assessment is conducted, and a project-specific is prepared and implemented, and the compliance, and corrective actions, if any are reported as required. PO (Environment) will be supported by Environmental Safeguards Specialist of PMCBC.

262. Each Zonal PIU will be staffed with two dedicated Safeguards Officers (Environmental Safeguards Officer, and Social Safeguards Officer) who will assist PMU Project Officer (Environment) in implementation of the environmental safeguards at the zonal PIU level. CMSC will assist Zonal, cluster and town-level PIUs and PMU in preparation, implementation and monitoring of environmental safeguards. There will be two sets of CMSCs each housed in a Zonal PIU (Jaipur and Jodhpur) and will assist the PIUs under respective Zonal PIUs. Each CMSC will be staffed with one Environmental Safeguard Specialist, and one Support Environmental Engineer in each PIU. Community Awareness and Public Participation Consultants (CAPPC) will closely work in field (with PIUs) to facilitate creation of project awareness and ensuring public participation for all project works at the community level. This shall mainly involve house connections for water supply, sewerage and metering. Besides, they shall also undertake various IEC activities to promote and pursue health and hygiene amongst communities.

263. **Contractor.** Project being DBO contract, contractor will be required to review the IEE and provide information to consultant's ESS for update the IEE as per changed design and latest scope of works. The contractor shall appoint an Environment, Health and Safety (EHS) engineer who will be responsible on a day-to-day basis for (i) ensuring implementation of EMP, (ii) coordinating with the ACM and environment safeguards specialists (all levels PO, SO and ESS); (iii) community liaison, consultations with interested/affected parties, and grievance redress ; and (iv) reporting. Requirement of EHS Supervisor will be included in the bid documents.

264. The Contractor has submitted to RUDSICO-EAP, for review and approval, a site-specific environmental management plan (SEMP) including (i) designed sites or locations for construction work camps, storage areas, hauling roads, lay down areas, disposal areas for solid and hazardous wastes; (ii) specific mitigation measures following the approved EMP; (iii) monitoring program per SEMP; and (iv) budget for SEMP implementation. No works can commence prior to approval of SEMP by the PMU.

265. The following Figure 22 and Table 19 summarizes the institutional responsibility of environmental safeguards at all stages of the project

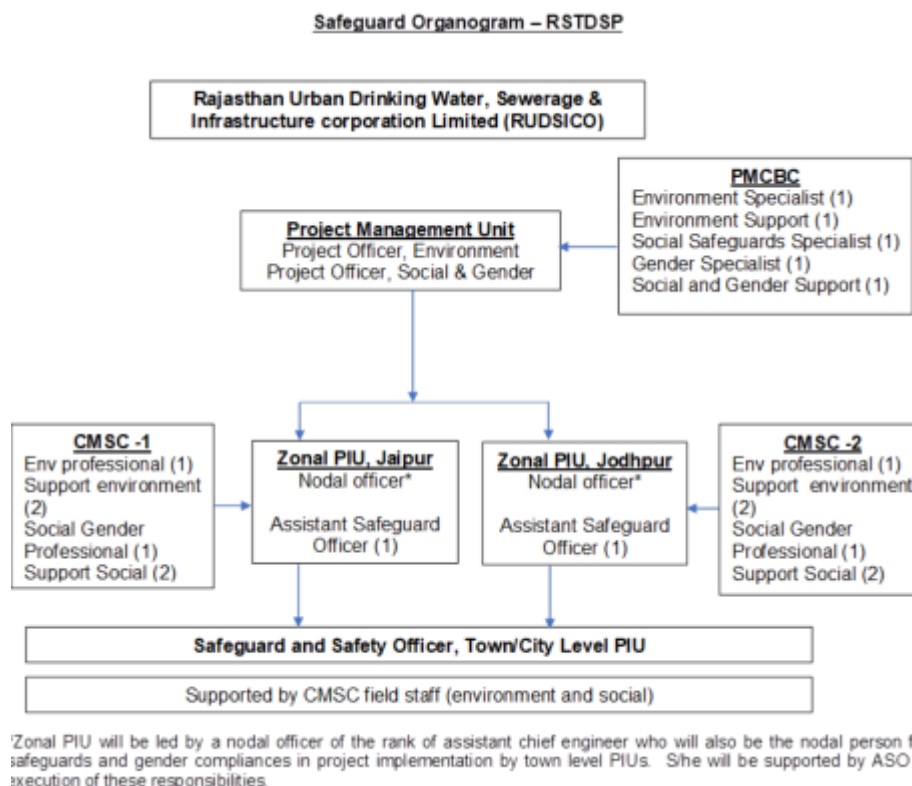**Figure 22: Safeguards Implementation Arrangements**

266. **Project Management Unit.** RUDSICO will establish a state-level PMU, headed by dedicated project director, and housed in EAP division of RUDSICO. For the purpose of project implementation, two Zonal Project Implementation Units (Zonal PIUs), at Jaipur and Jodhpur, headed by Additional Chief Engineers (ACE) will be established. At PMU, there will be two dedicated project officers (i) Project Officer (Environment) and (ii) Project Officer (Social and Gender), who will be responsible for compliance with the environmental, social safeguards and gender in program implementation. Key responsibilities of the Project Officer (Environment) are as follows:

- (i) Review REA checklists and assign categorization based on ADB SPS 2009 and EARF
- (ii) Submit IEE to ADB for approval and disclosure in ADB website
- (iii) Ensure approved IEEs are disclosed in RSTDSP/PMU websites and summary posted in public areas accessible and understandable by local people.
- (iv) Ensure EMPs are included in the bid documents and contracts
- (v) Organize an orientation workshop for PMU, PIU, ULB and all staff involved in the project implementation on (a) ADB SPS, (b) Government of India national, state, and local environmental laws and regulations, (c) core labor standards, (d) OH&S, (e) EMP implementation especially spoil management, working in congested areas, public relations and ongoing consultations, grievance redress, etc.
- (vi) Assist in addressing any grievances brought about through the GRM
- (vii) Organize an induction course for the training of contractors preparing them on EMP implementation, environmental monitoring requirements related to mitigation measures; and taking immediate actions to remedy unexpected

adverse impacts or ineffective mitigation measures found during the course of implementation.

- (viii) Ensure compliance with all government rules and regulations regarding site and environmental clearances as well as any other environmental requirements
- (ix) Assist PMU, PIUs, and project consultants to document and develop good practice construction guidelines to assist the contractors in implementing the provisions of IEE and EMP.
- (x) Assist in the review of the contractors' implementation plans to ensure compliance with the IEE.
- (xi) Review monthly monitoring reports submitted by PIUs, and prepare and submit to ADB semi-annual monitoring reports
- (xii) If necessary, prepare Corrective Action Plan and ensure implementation of corrective actions to ensure no environmental impacts;
- (xiii) Review and submit Corrective Action Plans to ADB
- (xiv) Coordinate with national and state level government agencies
- (xv) Coordinate PIUs, consultants and contractors on mitigation measures involving the community and affected persons and ensure that environmental concerns and suggestions are incorporated and implemented

267. The PMU will be supported by three institutional consultants under the supervision and control of PD, PMU: (i) the Project Management and Capacity Building Consultants (PMCBC) will support the PMU; (ii) 2 Construction Management and Supervision Consultants (CMSC) will support the 2 zonal PIUs and town-level PIUs; and (iii) Community Awareness and Public Participation Consultants (CAPPC), will support the zonal PIUs and town-level PIUs.

268. **Zonal Project implementation units (Zonal PIUs).** There are two zonal level PIUs at Jaipur and Jodhpur. Under each zonal PIU, there will be city/town level PIUs, for ease of day-to-day monitoring and management at local level. The Additional Chief Engineer at each Zonal PIU will serve as the Nodal Officer, Safeguards and Gender. Each Zonal PIU will be staffed with an assistant safeguards officer (ASO Environmental and Social Safeguards) who will assist PMU project officer (environment/social) in implementation of the environmental/social safeguards and GESI Action Plan in PIUs under its jurisdiction. Zonal PIUs will undertake internal monitoring and supervision and record observations throughout the project period to ensure that the safeguards and mitigation measures are provided as intended.

269. The zonal level Assistant Safeguards Officer will oversee safeguards implementation by the city/town level PIUs, coordinate public consultations, information disclosure, regulatory clearances and approvals, implementation of resettlement plans, EMP implementation, and grievance redressal. Key safeguard tasks and responsibilities of the zonal PIU Assistant Safeguards Officer (Environment) are as follows:

- (i) Coordinate updating/revision of IEEs updated based on detailed design and technical studies (asbestos management, heritage impact assessment, and/or biodiversity assessment);
- (ii) Review and submit approved updated/revised IEE to PMU;
- (iii) Ensure relevant information in the IEE is disclosed to stakeholders;
- (iv) Obtain all necessary clearances, permits, consents, NOCs, etc. Ensure compliance to the provisions and conditions;
- (v) Ensure EMP requirements for pre-construction regarding sites for disposal of wastes, camps, storage areas, quarry sites, etc. are complied and communicated by town-level PIUs to contractors in a timely manner;

- (vi) Support town-level PIUs in supervising contractor EMP implementation. If necessary, organize an induction course upon mobilization of contractors, preparing them on EMP implementation, environmental monitoring requirements related to mitigation measures, and on taking immediate action to remedy unexpected adverse impacts or ineffective mitigation measures found during the course of implementation;
- (vii) Coordinate actions required for obtaining rights of way in timely manner;
- (viii) Take corrective actions when necessary to ensure no environmental impacts;
- (ix) Consolidate monthly environmental monitoring reports by town-level PIUs and submit to PMU;
- (x) Formulate timebound corrective actions for non-compliances
- (xi) Conduct continuous public consultation and awareness;
- (xii) Address any grievances in a timely manner as per the GRM; and
- (xiii) Issue clearance for contractor's post-construction activities as specified in the EMP.

**270. Town/City Level Project Implementation Unit (PIU).** The town-level PIUs shall be responsible for the quality of works executed under the project and will be guided by the zonal PIUs. The city/town PIUs will be responsible for implementation of the IEE. The town-level PIUs will be headed by a Project Manager [Executive Engineer (EE) or Assistant Engineer (AE)] and supported by CMSC field staff. Environment Specialist of CMSC will assist PIU in implementation of environmental safeguard. At each PIU, the Assistant Project Manager will be given additional responsibilities of safeguard tasks and will be designated as Safeguard and Safety Officer (SSO). The SSO will be assisted by the Social and Gender Specialist and Environment Specialist of CMSC in reviewing updated/revised IEEs, etc. They will also be responsible for coordination of field level activities related to safeguards conducted by the DBO contractor and CMSC. Key responsibilities of the town-level Environment Specialist are as follows:

- (i) Prepare REA Checklists, No Mitigation Checklists, baseline environmental surveys to support screening and categorization per EARF;
- (ii) Submit designed subproject categorization to Zonal PIU and coordinate with PMCBC the preparation of IEE and technical studies;
- (iii) Coordinate the conduct of technical studies such as but not limited to inventory of asbestos materials in subproject sites, heritage impact assessment and/or biodiversity assessment;
- (iv) Ensure IEEs are updated/revised based on detailed design and recommendations of technical studies;
- (v) Oversee day-to-day implementation of EMPs by contractors, including compliance with all government rules and regulations;
- (vi) Take necessary action for obtaining rights of way;
- (vii) Take corrective actions when necessary to ensure no environmental impacts;
- (viii) Submit monthly environmental monitoring reports to Zonal PIUs;
- (ix) Conduct continuous public consultation and awareness;
- (x) Address any grievances in a timely manner as per the GRM; and
- (xi) Issue clearance for contractor's post-construction activities as specified in the EMP.

**271. Contractors.** The contractor will be required to update the IEE and will be responsible for providing final design (including pipe alignments) to the supervision consultant for finalization/updating of resettlement plan. The contractor shall appoint an Environment, Health and Safety (EHS) Engineer who will be responsible on a day-to-day basis for (i) ensuring



implementation of EMP, (ii) coordinating with the Town-level PIUs and environment specialists of project consultant teams; (iii) community liaison,<sup>1</sup> consultations with interested/affected people, (iv) field-level grievance redress; and (iv) reporting.

272. The Contractor will be required to submit to RUDSICO, for review and approval, a site-specific environmental management plan (SEMP) including (i) designed sites or locations for construction work camps, storage areas, hauling roads, lay down areas, disposal areas for solid and hazardous wastes; (ii) specific mitigation measures following the approved EMP; (iii) monitoring program per SEMP; (iv) budget for SEMP implementation. No works can commence prior to approval of SEMP.

273. A copy of the EMP or approved SEMP will be kept on-site during the construction period at all times. Non-compliance with, or any deviation from, the conditions set out in the EMP or SEMP constitutes a failure in compliance and will require corrective actions. The EARF and the IEEs specify responsibilities in EMP implementation during design, construction and O&M phases.

274. **RUDSICO** will ensure that bidding and contract documents include specific provision requiring Contractors to comply with: (i) all applicable labor laws and core labor standards on (a) prohibition of child labor as defined in national legislation for construction and maintenance activities; (b) equal pay for equal work of equal value regardless of gender, ethnicity, or caste and (c) elimination of forced labor; and (ii) the requirement to disseminate information on sexually transmitted diseases including HIV/AIDS, to employees and local communities surrounding the project sites.

**Table 20: Safeguard Roles and Responsibilities**

| <b>Implementation Arrangements</b>                                                                                                                                                                                                                                                                                                       | <b>Roles and Responsibilities</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Executing Agency:</b><br>LSGD through RUDSICO                                                                                                                                                                                                                                                                                         | <ul style="list-style-type: none"> <li>• Negotiate, sign, and execute the program.</li> <li>• Allocate and release government counterpart funds on time.</li> <li>• Facilitate obtaining timely Government-level approvals for smooth implementation of the program.</li> <li>• Monitor program implementation progress and ensure timely actions for completion of the project.</li> <li>• Plan, implement, and monitor public relations activities; gender mainstreaming initiatives and community participation activities, with the support of PIUs.</li> </ul> |
| <b>RUDSICO Board (like SLEC)</b><br><b>Chairman:</b> Minister of Urban Development Department, GoR<br><b>Members:</b> <ul style="list-style-type: none"> <li>• Hon'ble Minister, LSGD</li> <li>• Secretary, LSGD – Vice Chairman</li> <li>• Principal Secretary, PHED -Director</li> <li>• Principal Secretary, PWD -Director</li> </ul> | <ul style="list-style-type: none"> <li>• Provide strategic guidance.</li> <li>• Provide policy decisions to support smooth program implementation.</li> <li>• Facilitate inter-departmental coordination and cooperation.</li> <li>• Support RUDSICO with government/ministerial level approvals.</li> <li>• Overall project review (physical, financial, safeguards)</li> <li>• Approvals/Decisions as per approved SOP (Standard Operating Procedures – laying delegation of powers, Administrative and Financial Approval of works and services)</li> </ul>      |

<sup>1</sup> Reasonable size social outreach team (SOT) to be appointed by contractor to facilitate community liaison, consultations and R&R implementation (including resolution of grievances). Requirement of SOT will be included in bid document.

| Implementation Arrangements                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Roles and Responsibilities                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• Secretary, Finance (Budget) Department -Director</li> <li>• Director, Department of Local Bodies</li> <li>• Executive Director, RUDSICO</li> <li>• Project Director, RUDSICO</li> <li>• Independent Director</li> <li>• Independent Director</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>RUDSICO (with approval of RUDSICO board, as needed)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <ul style="list-style-type: none"> <li>• Required support to review and monitor the physical and financial progress of the subprojects.</li> <li>• Provide additional technical support from RUDSICO Office (along with PMCBC) to PIUs for speedy resolution of implementation related issues such as variations, deviations, time and cost control, among others.</li> <li>• Provide backup technical support for review and finalization of DPRs, bid documents, bidding and award of contracts.</li> <li>• Review, appraise and put up matters to RUDSICO Board for approval, as described under “Delegation of Powers”</li> <li>• Overall Liaison, Monitoring and Reporting to DEA and ADB as per agreed requirements</li> <li>• Pursue GoR, through LSGD for approval of Policy, Rules, Guidelines, Government Orders for use in the state</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Program Management Unit</b> <ul style="list-style-type: none"> <li>• Program Director: <b>Project Director, RUDSICO</b></li> <li>• Additional Project Director, RUDSICO</li> </ul> <u>PMU Staff</u> <ul style="list-style-type: none"> <li>• 2 Zonal Additional Chief Engineers (Jaipur and Jodhpur). The Office of ACE to have Two EE, Two AE, Computer Operator, Support staff</li> <li>• Dy. PD(T) (Procurement, Tendering, Contracts, Consultancies) at RUDSICO HQ</li> <li>• Dy. PD(A) (Administration, Institutional) at RUDSICO HQ</li> <li>• SE's (Asset Management, NRW, Safeguards, Resettlement) at RUDSICO HQ</li> <li>• Financial Advisor at RUDSICO, Jaipur HQ</li> <li>• Senior Accounts Officer at RUDSICO, Jaipur HQ</li> </ul> | <b>Program and Financial Management</b> <ul style="list-style-type: none"> <li>• Overall responsibility of the investment program and financial management and administering program procedures and guidelines.</li> <li>• Oversee design of all projects (in individual tranches as needed).</li> <li>• Finalize the DPRs for ULBs/implementing agencies and obtain approval from ADB and government.</li> <li>• Establish project management and monitoring systems (Command and Control Center)</li> <li>• Undertake project appraisals based on technical, financial, economic and safeguards compliance as agreed by GoR/RUDSICO and ADB.</li> <li>• Provide overall technical and implementation guidance to the PIUs as required.</li> <li>• Facilitate approval of various implementation related requests from the Project Implementation management and Field Units</li> <li>• Sign key documents including withdrawal applications and audit reports.</li> <li>• Timely submission of any withdrawal applications.</li> <li>• Act as focal point for communication with the ADB.</li> <li>• Ensure compliance with loan covenants, ADB's guidelines, procedures and policies.</li> <li>• Facilitate ADB program review missions.</li> <li>• Represent the program at Tripartite Review Meetings.</li> </ul> <b>Safeguards compliance</b> <ul style="list-style-type: none"> <li>• Review and monitor safeguards compliance by PIUs and</li> </ul> |

| Implementation Arrangements                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Roles and Responsibilities                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>PMU at HO supported by:</p> <ul style="list-style-type: none"> <li>• Project Officers (7 Nos. EE level with POs for Procurement and contracts; NRW Reduction; Contract Management and O&amp;M, Social Safeguards, Environmental Safeguards, Capacity Building etc.)</li> <li>• Accounts officers</li> <li>• Assistant Project Officers – on each with PO – AE level, Assistant Account Officer</li> <li>• IT Cell (project Management and Monitoring, GIS, MIS etc.) with MIS Expert</li> <li>• Statistical Unit</li> <li>• Legal Unit</li> <li>• Administration and Establishment</li> </ul>                                                                                                                                                                                                                                                                                                                         | <p>support corrective actions as necessary.</p> <ul style="list-style-type: none"> <li>• Submit semi-annual safeguard monitoring reports to ADB</li> <li>• Guide PIUs as and when necessary on safeguards compliance, and arrange capacity building for PIUs</li> </ul> <p><b>Capacity Building and Institutional</b></p> <ul style="list-style-type: none"> <li>• Allocate funds for capacity building and arrange required disbursements</li> <li>• Approve and Monitor Capacity Building Plan</li> <li>• Pursue reforms with GoR</li> <li>• Supervise and Monitor PMCB Consultants and approve their invoices</li> </ul>                                                                                                                                                                                                                                                                           |
| <p><b>Project Implementation Units</b></p> <ul style="list-style-type: none"> <li>• 2 zonal PIUs (1 in Jaipur, 1 in Jodhpur)</li> </ul> <p><b>A. PIU Staff</b></p> <ul style="list-style-type: none"> <li>• Project Manager (SE level)</li> <li>• Executive Engineer / Assistant Engineer (2 or 3) at each town for monitoring and supervision support</li> <li>• Assistant Accounts Officer</li> <li>• Computer Operator</li> <li>• Support Staff</li> </ul> <p>Supported by</p> <ul style="list-style-type: none"> <li>• Contract Management Officer (SE/EE of cluster shall invariably function as contract management officer) - <b>No new position</b> –</li> <li>• CMSC and CAPP Consultants (2 support engineers of CMSC at each town as per CMSc consultancy, 2 community mobilizers for each town – as per CAPP consultancy) besides required consultancy professionals reporting to EE)</li> </ul> <p>ULBs</p> | <p><b>Project Management</b></p> <ul style="list-style-type: none"> <li>• Responsible for implementation management of sub-projects.</li> <li>• Responsible for day-to-day implementation, monitoring and reporting.</li> </ul> <p><b>Safeguards Compliance (with CAPPC)</b></p> <ul style="list-style-type: none"> <li>• Ensure compliance with safeguard frameworks and plans</li> <li>• Facilitate consultation with stakeholders and disclose program information in consultation with PMU.</li> <li>• Address grievances (may be through Grievance Redressal Mechanism) Coordinate land acquisition actions, if required.</li> <li>• Submit quarterly safeguard monitoring reports to PMU.</li> </ul> <p><b>Advance Project Preparation</b></p> <ul style="list-style-type: none"> <li>• Prepare/supervise and monitor preparation of DPRs and bidding documents for future tranches.</li> </ul> |
| <p>ULBs</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <ul style="list-style-type: none"> <li>• Nodal Officers to be a part of PIU and discharge the assigned</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

| Implementation Arrangements | Roles and Responsibilities                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | <p>functions and part of project planning and implementation</p> <ul style="list-style-type: none"> <li>• Establish liaison with local communities, resolve local grievances for smooth implementation of the project</li> <li>• Support CAPPCC in awareness creation, connection modalities to household consumers etc.</li> </ul>                                                                 |
| Asian Development Bank      | <ul style="list-style-type: none"> <li>• Approve and monitor safeguards documents and implementation compliance.</li> <li>• Field review missions.</li> <li>• Facilitate knowledge sharing.</li> <li>• Provide training in program management and ADB procurement procedures to PMU/PIU staff.</li> <li>• Support LSGD, RUDSICO, PIUs etc. through various capacity building activities.</li> </ul> |

**Table 21: Institutional Roles and Responsibilities**

| Responsible Agency                     | Responsibility                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                         |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
|                                        | Pre-Construction Stage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Construction Stage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Post-Construction                                                                                                       |
| PMU<br>(Project Officer; Environment), | <p>(i) Review REA checklists and assign categorization based on ADB SPS 2009</p> <p>(ii) Review and approve EIA/IEE</p> <p>(iii) Submit EIA/IEE to ADB for approval and disclosure in ADB website</p> <p>(iv) Ensure approved IEEs are disclosed in RSTDSP/PMU websites and summary posted in public areas accessible and understandable by local people.</p> <p>(v) Ensure environmental management plans (EMPs) are included in the bid documents and contracts</p> <p>(vi) Organize an orientation workshop for PMU, PIU, ULB and all staff involved in the project implementation on (a) ADB SPS, (b) Government of India national, state, and local environmental laws and regulations, (c) core labor standards, (d) OH&amp;S, (e) EMP implementation</p> | <p>(i) Over-all environmental safeguards compliance of the project</p> <p>(iii) Monitor and ensure compliance of EMPs as well as any other environmental provisions and conditions.</p> <p>(i) Review monthly monitoring report</p> <p>(ii) Prepare and submit to ADB semi-annual monitoring reports</p> <p>(iv) If necessary prepare Corrective Action Plan and ensure implementation of corrective actions to ensure no environmental impacts;</p> <p>(iii) Review and submit Corrective Action Plans to ADB</p> <p>(iv) Organize capacity building programs on environmental safeguards</p> <p>(iv) Coordinate with national and state level government agencies</p> | Compliance monitoring to review the environmental performance of project component, if required and as specified in EMP |

| Responsible Agency               | Responsibility                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                             |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                  | Pre-Construction Stage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Construction Stage                                                                                                                                                                                                                                                                                                                                             | Post-Construction                                                                                                                                           |
|                                  | <p>especially spoil management, working in congested areas, public relations and ongoing consultations, grievance redress, etc.</p> <p>(vii) Assist in addressing any grievances brought about through the Grievance Redress Mechanism in a timely manner as per the IEEs</p> <p>(viii) Organize an induction course for the training of contractors preparing them on EMP implementation, environmental monitoring requirements related to mitigation measures; and taking immediate actions to remedy unexpected adverse impacts or ineffective mitigation measures found during the course of implementation.</p> <p>(ix) Ensure compliance with all government rules and regulations regarding site and environmental clearances as well as any other environmental requirements</p> <p>(x) Assist PMU, PIUs, and project NGOs to document and develop good practice construction guidelines to assist the contractors in implementing the provisions of IEE.</p> <p>(xi) Assist in the review of the contractors' implementation plans to ensure compliance with the IEE.</p> | <p>(vi) Assist in addressing any grievances brought about through the Grievance Redress Mechanism in a timely manner as per the IEEs</p> <p>(vii) Coordinate PIUs, consultants and contractors on mitigation measures involving the community and affected persons and ensure that environmental concerns and suggestions are incorporated and implemented</p> |                                                                                                                                                             |
| PIU, Assistant Safeguard Officer | <p>(i) Ensure IEE is included in bid documents and contract agreements. Ensure cost of EMP implementation is provided.</p> <p>(ii) Disclose of approved</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <p>(i) oversee day-to-day implementation of EMPs by contractors, including compliance with all government rules and regulations.</p>                                                                                                                                                                                                                           | <p>(i) Conducting environmental monitoring, as specified in the EMP.</p> <p>(ii) Issuance of clearance for contractor's post-construction activities as</p> |

| Responsible Agency                                                                                                                                                                 | Responsibility                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
|                                                                                                                                                                                    | Pre-Construction Stage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Construction Stage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Post-Construction     |
|                                                                                                                                                                                    | <p>EIAs/IEEs.</p> <p>(iii) Obtain all necessary clearances, permits, consents, NOCs, etc. Ensure compliance to the provisions and conditions.</p> <p>(iv) EMP implementation regarding sites for disposal of wastes, camps, storage areas, quarry sites, etc.</p> <p>(v) Organize an induction course for the training of contractors, preparing them on EMP implementation, environmental monitoring requirements related to mitigation measures, and on taking immediate action to remedy unexpected adverse impacts or ineffective mitigation measures found during the course of implementation.</p> | <p>(ii) take necessary action for obtaining rights of way;</p> <p>(iii) oversee implementation of EMPs, including environmental monitoring by contractors;</p> <p>(iv) take corrective actions when necessary to ensure no environmental impacts;</p> <p>(v) submit monthly environmental monitoring reports to PMU,</p> <p>(vi) conduct continuous public consultation and awareness;</p> <p>(vii) address any grievances brought about through the grievance redress mechanism in a timely manner as per the IEEs; and</p> | specified in the EMP. |
| <p>Consultant –</p> <p>1.PMCBC-Environmental Safeguard Specialist –</p> <p>1 no.</p> <p>Asbestos Expert – 1no.</p> <p>Heritage Expert – 1no.</p> <p>Biodiversity Expert – 1no.</p> | <p>(i) Review IEE/EMP submitted by CMSC and revise report to submit to PMU</p> <p>(ii) Assist PMU and PIU in obtaining all necessary clearances, permits, consents, NOCs, etc. Ensure provisions and conditions are incorporated in the IEE and detailed design documents.</p> <p>(iii) Assist in ensuring IEE is included in bid documents and contract agreements.</p> <p>(iv) Assist in determining adequacy of cost for EMP implementation.</p> <p>(v) Assist in addressing any concern related to IEE and EMP.</p> <p>(vi). Conduct specific</p>                                                    | <p>(i) Monitor EMP implementation</p> <p>(ii) Assist in addressing any grievances brought about through the Grievance Redress Mechanism in a timely manner as per the IEEs.</p>                                                                                                                                                                                                                                                                                                                                              |                       |

| Responsible Agency                                                             | Responsibility                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                             |
|--------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
|                                                                                | Pre-Construction Stage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Construction Stage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Post-Construction                                                                                                           |
|                                                                                | assessment requirements                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                             |
| Consultant-<br>2. CMSC-<br>2 nos.<br><br>Environmental safeguards professional | <p>(i) Update initial environmental assessment for designed project using REA checklists and submit to PIU/PMCBC</p> <p>(ii) Assist in summarizing IEE and translating to language understood by local people.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <p>(i) Monitoring of Implementation of EMP at site by contractor</p> <p>(ii) Recommend corrective action measures for non-compliance by contractors</p> <p>(iii) Assist in the review of monitoring reports submitted by contractors</p> <p>(iv) Assist in the preparation of monthly monitoring reports</p> <p>(v) conduct continuous public consultation and awareness;</p>                                                                                                                                                                                                                                                                                                                                                                                                     | <p>(i) Assist in the inspection and verification of contractor's post-construction activities.</p>                          |
| Contractors (EHS Engineer)                                                     | <p>(i) Review the IEE and provide information about changes needed as per revised design and scope of works to ESS of PMCBC for final revision of IEE</p> <p>(ii) Prepare EHS plan and take approval from CMSC/PIU and Ensure EMP implementation cost is included in the methodology.</p> <p>(iii) Undergo EMP implementation orientation by ESS of supervision consultant prior to start of works</p> <p>(iv) Provide EMP implementation orientation to all workers prior to deployment to worksites</p> <p>(v) Seek approval for camp sites and sources of materials.</p> <p>(vi) Ensure copy of IEE is available at worksites. Summary of IEE is translated to language understood by workers and posted at visible places at all times.</p> | <p>(i) Implement EMP.</p> <p>(ii) Implement corrective actions if necessary.</p> <p>(iii) Prepare and submit monitoring reports including pictures to PIU</p> <p>(iv) Comply with all applicable legislation, is conversant with the requirements of the EMP;</p> <p>(v) Brief his staff, employees, and laborer about the requirements of the EMP and provide environmental awareness training to staff, employees, and laborers;</p> <p>(vi) Ensure any sub-contractors/ suppliers who are utilized within the context of the contract comply with all requirements of the EMP. The Contractor will be held responsible for non-compliance on their behalf;</p> <p>(vii) Bear the costs of any damages/compensation resulting from non-adherence to the EMP or written site</p> | <p>(i) Ensure EMP post-construction requirements are satisfactorily complied</p> <p>(ii) Request certification from PIU</p> |



| Responsible Agency | Responsibility         |                                                                                                                                         |                   |
|--------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------|
|                    | Pre-Construction Stage | Construction Stage                                                                                                                      | Post-Construction |
|                    |                        | instructions;<br><br>(viii) Ensure that PIU and ACM/SO are timely informed of any foreseeable activities related to EMP implementation. |                   |

### C. Institutional Capacity and Development

275. Executing and implementing agencies need to have a sustained capacity to manage and monitor environmental safeguards. Although specialist consultants support will be available to PMU and PIUs, it is necessary to mainstream safeguards in day-to-day working. Therefore, PMU and PIUs require capacity building measures for (i) a better understanding of the project-related environmental issues; and (ii) to strengthen their role in preparation of IEE, implementation of mitigation measures, and subsequent monitoring. Trainings and awareness workshops are included in the project with the primary focus of enabling the PMU and PIU staff to understand impact assessments and carry out environmental monitoring and implement EMPs. After participating in such activities, the participants will be able to review environmental assessments, conduct monitoring of EMPs, understand government and ADB requirements for environmental assessment, management, and monitoring (short- and long-term), and incorporate environmental features into future project designs, specifications, and tender documents and carry out necessary checks and balances during project implementation.

276. PMCBC's ESSS shall assess the capabilities of the target participants, customize the training modules accordingly and provide the detailed cost.

277. Typical modules would be as follows: (i) sensitization; (ii) introduction to environment and environmental considerations in water supply and wastewater projects; (iii) review of IEEs and integration into the project detailed design; (iv) improved coordination within nodal departments; and (v) monitoring and reporting system. Specific modules customized for the available skill set will be devised after assessing the capabilities of the target participants and the requirements of the project. The contractors will be required to conduct environmental awareness and orientation of workers prior to deployment to work sites. The designed training project, along with the frequency of sessions, is presented in table 21.

**Table 22: Outline Capacity Building Program on EMP Implementation**

| S. No | Description                                                                                                                                                                                                                                                                    | Target Participants and Venue                                                 | Cost and Source of Funds |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|--------------------------|
| 1     | Introduction and Sensitization to Environmental Issues (1 day)<br>- ADB Safeguards Policy Statement<br>-EARF of RSTDSP<br>-Government of India and Rajasthan applicable safeguard laws, regulations and policies including but not limited to core labor standards, OH&S, etc. | All staff, ULBs and consultants involved in the project<br><br>At PMU, Jaipur | PMU cost                 |

|   |                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                         |                                                                                             |
|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
|   | -Incorporation of EMP into the project design and contracts<br>-Monitoring, reporting and corrective action planning                                                                                                                                                                                                                                                                                   |                                                                                                                                                         |                                                                                             |
| 2 | Treated Effluent Reuse Concepts, Design and Management                                                                                                                                                                                                                                                                                                                                                 | All staff at PMU and ULBs                                                                                                                               | PMU cost                                                                                    |
| 3 | Sludge Reuse Concept, Design and Management                                                                                                                                                                                                                                                                                                                                                            | All staff at PMU and ULBs                                                                                                                               | PMU cost                                                                                    |
| 4 | EMP implementation (2 days)<br>-Roles and responsibilities<br>-OH&S planning and implementation<br>-Wastes management (water, hazardous, solid, excess construction materials, spoils, etc.)<br>-Working in congested areas,<br>- Public relations<br>- Consultations<br>- Grievance redress<br>-Monitoring and corrective action planning<br>-Reporting and disclosure<br>-Post-construction planning | All staff and consultants involved in the subproject<br><br>All contractors before start of construction works<br><br>At PIU                            | PMU cost                                                                                    |
| 5 | Plans and Protocols (1 day)<br>-Construction site standard operating procedures (SOP)<br>- Asbestos Management Plan<br>-Heritage Impact Assessment<br>-Biodiversity and Critical Habitat Assessment<br>- Site-specific EMP<br>-Traffic management plan<br>-Spoils management plan<br>-Waste management plan<br>- Chance find protocol<br>- O&M plans<br>- Post-construction plan                       | All staff and consultants involved in the project<br><br>All contractors before start of construction works or during mobilization stage.<br><br>At PIU | PMU cost<br><br>Contractors cost as compliance to contract provisions on EMP implementation |
| 6 | Experiences and best practices sharing<br>- Experiences on EMP implementation<br>- Issues and challenges<br>- Best practices followed                                                                                                                                                                                                                                                                  | All staff and consultants involved in the project<br>All contractors<br>All NGOs<br>At PMU Jaipur                                                       | PMU Cost                                                                                    |
| 7 | Contractors Orientation to Workers on EMP implementation (OH&S, core labor laws, spoils management, etc.)                                                                                                                                                                                                                                                                                              | All workers (including manual laborers) of the contractor prior to dispatch to worksite                                                                 | Contractors cost as compliance to contract provisions on EMP implementation                 |

#### D. Monitoring and Reporting

278. Prior to commencement of the work, the contractor will either submit a compliance report to PIU ensuring that all identified potential environmental impacts and their mitigation measures as detailed in the EMP are meeting project requirements and scope of works and will be undertaken or will provide EMP for the designed works with his Service Improvement Plan (SIP) covering all the requirements designed in this IEE. PIU with the assistance of the ASO and ESS of Consultants will review the report and thereafter PMU will allow commencement of works.

279. During construction, compliance of EMP and results from internal monitoring by the contractor will be submitted in their quarterly EMP implementation reports to the PIU and Consultants. ASO and ACM will review and advise contractors for corrective actions if necessary. Quarterly report summarizing compliance and corrective measures taken will be prepared by ASO with the assistance of ESS and submitted to PMU.

280. Based on quarterly reports and measurements, PMU with assistance of ESS will draft, and submit to ADB, semi-annual report (**Appendix 30**). Once concurrence from the ADB is received the report will be disclosed in the Project website.

281. The PMU will include safeguards implementation status in the quarterly progress report using the suggested checklists in Appendix 27 and separate semi-annual environmental and social safeguards monitoring reports to ADB, which will be reviewed and disclosed on ADB's website. The monitoring reports will be prepared by PMU with assistance from the PMU-Consultant and inputs from the PIU's safeguard officers, contractors and NGOs, where relevant. The status of safeguard implementation, issues, and corrective actions including associated cost and schedule are to be clearly reported to ADB. The status of safeguards implementation will also be discussed at each ADB review mission and with necessary issues and agreed actions recorded in Aide Memoires. ADB will also carry out annual environmental and/or social (including gender) reviews of the Project. The outline of the semi-annual environmental monitoring report is in Appendix 30. ADB's monitoring and supervision activities are carried out on an ongoing basis until a project completion report (PCR) is issued. Thus, semi-annual report, which may cover O&M of completed packages, will be submitted to ADB until PCR is issued.

282. ADB will review project performance against the Phase-IV project commitments as agreed in the legal documents. The extent of ADB's monitoring and supervision activities will be **commensurate** with the project's risks and impacts. Monitoring and supervising of social and environmental safeguards will be integrated into the project performance management system.

## E. EMP Implementation Cost

283. Most of the mitigation measures require the contractors to adopt good site practice, which should be part of their normal procedures already, so there are unlikely to be major costs associated with compliance. Regardless of this, any costs of mitigation by the **construction** contractors or consultants are included in the budgets for the civil works and do not need to be estimated separately here. Mitigation that is the responsibility of PIU/ULB will be provided as part of their management of the project, so this also does not need to be duplicated here. Cost for the capacity building program is included as part of the project (Table 23).

**Table 23: Cost Estimates to Implement the EMP**

|           | Particulars                      | Stages | Unit          | Total Number | Rate (INR) | Cost (INR)     | Costs Covered By                          |
|-----------|----------------------------------|--------|---------------|--------------|------------|----------------|-------------------------------------------|
| <b>A.</b> | <b>Mitigation Measures</b>       |        |               |              |            |                |                                           |
| 1         | Compensatory plantation measures |        | Constructi on | lump sum     | -          | 100,000        | Civil works contract under DBO Contractor |
|           | <b>Subtotal (A)</b>              |        |               |              |            | <b>100,000</b> | <b>100,000</b>                            |
| <b>B.</b> | <b>Monitoring Measures#</b>      |        |               |              |            |                |                                           |
| 1         | Air quality                      | Pre –  | Each          | <b>63</b>    | 4920       | 309960         | Civil works                               |

|           | Particulars                                              | Stages                                                     | Unit     | Total Number | Rate (INR) | Cost (INR)       | Costs Covered By     |
|-----------|----------------------------------------------------------|------------------------------------------------------------|----------|--------------|------------|------------------|----------------------|
|           | monitoring**                                             | Construction and Construction                              |          |              |            |                  | contract             |
| 2         | Noise levels monitoring**                                | Pre – Construction and Construction                        | Each     | 63           | 1980       | 124740           | Civil works contract |
| 3         | Ground Water***                                          | Pre – Construction and Construction                        | Each     | 54           | 6720       | 362880           | Civil works contract |
| 4         | Soil Testing***                                          | Pre – Construction and Construction                        | Each     | 54           | 5880       | 317520           | Civil works contract |
|           | <b>Subtotal (B)</b>                                      |                                                            |          |              |            | <b>1,115,100</b> |                      |
| <b>C.</b> | <b>Capacity Building</b>                                 |                                                            |          |              |            |                  |                      |
| 1.        | Introduction and sensitization to environment issues     | Pre-construction                                           | lump sum |              |            | 100,000          | PMU Cost             |
| 2         | EMP implementation                                       | Construction                                               | lump sum |              |            | 50,000           | PMU Cost             |
| 3.        | Plans and Protocols                                      | Construction                                               | lump sum |              |            | 25,000           | PMU Cost             |
|           |                                                          |                                                            | lump sum |              |            | 25,000           | Civil works contract |
| 4.        | Experiences and best practices sharing                   | Construction/Post -Construction                            | lump sum |              |            | 100,000          | PMU Cost             |
| 5.        | Contractors Orientation to Workers on EMP implementation | Prior to dispatch to worksite                              | Lump sum |              |            | 25,000           | Civil works contract |
|           | <b>Subtotal (C)</b>                                      |                                                            |          |              |            | <b>325,000</b>   |                      |
| <b>D</b>  | <b>Civil Works</b>                                       |                                                            |          |              |            |                  |                      |
| 1         | Water Sprinkling for dust suppression                    | Construction                                               | KL       | 11800        | 111        | 1,309,800        | Civil works contract |
| 2         | Rainwater Harvesting for water conservation              | Construction                                               | LS       | 4            | 1,000,000  | 4,000,000        | Civil works contract |
| 3         | Barricading                                              |                                                            |          |              |            |                  | Civil works contract |
|           | MS Pipe                                                  | Construction                                               | m        | 367564       | 38.5       | 14,151,214       |                      |
|           | MS Pipe with nut and bolt                                | Construction                                               | m        | 59547        | 50.0       | 2,977,350        |                      |
|           | <b>Sub Total (D)</b>                                     |                                                            |          |              |            | <b>22438364</b>  |                      |
| <b>E</b>  | <b>Asbestos Management</b>                               | Inventory Testing Overall Supervision for Asbestos Removal |          |              | Lump sum   | 7,000,000        | Civil works contract |

|          | Particulars                          | Stages                                                                                 | Unit | Total Number | Rate (INR) | Cost (INR)        | Costs Covered By     |
|----------|--------------------------------------|----------------------------------------------------------------------------------------|------|--------------|------------|-------------------|----------------------|
|          |                                      | Storage<br>Transportation<br>Disposal /<br>Treatment<br>Documentation<br>and Reporting |      |              |            |                   |                      |
|          | <b>Sub Total (E)</b>                 |                                                                                        |      |              |            | <b>7,000,000</b>  |                      |
| <b>F</b> | <b>Grievance Redressal Mechanism</b> |                                                                                        |      |              | Lump sum   | 350,000           | Civil works contract |
|          | <b>Sub Total (F)</b>                 |                                                                                        |      |              |            | <b>350,000</b>    |                      |
|          | <b>Total (A+B+C+D+E+F)</b>           |                                                                                        |      |              | <b>INR</b> | <b>31,328,464</b> |                      |

\* In preliminary design 10 trees are required to be cut, being DBO contract, contractor will be required to revise it. Compensatory plantation measures to be followed by contractor

\*\* STPs-3 nos, SPSs-2 nos. CWR/PH-1no, WS/WW networks-1 (total 7 locations) on quarterly basis

\*\*\* STPs-3 nos, SPSs-2 nos. CWR/PH-1no, (total 6 locations) on quarterly basis

# Computation of total number of samples for environmental monitoring as per following table 24

**Table 24: Breakup of Environmental Monitoring requirement**

| Towns        | Project components where environmental monitoring is required     | Total numbers of environmental monitoring required in one quarter    | Total numbers of environmental monitoring required in year (tree quarters leaving quarter of monsoon) | Project duration | Total number of environmental monitoring required during project duration |
|--------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|------------------|---------------------------------------------------------------------------|
| Sardarshahar | STPs-3<br>SPS-2<br>CWR&PH-1<br>WS/WW networks-1<br><b>Total-7</b> | Air- 7<br>Noise- 7<br>Surface Water- 0<br>Ground Water- 6<br>Soil- 6 | Air- 21<br>Noise- 21<br>Surface Water- 0<br>Ground Water- 18<br>Soil- 18                              | 3 years          | Air- 63<br>Noise- 63<br>Surface Water- 0<br>Ground Water- 54<br>Soil- 54  |

## **X. CONCLUSION AND RECOMMENDATION**

284. This IEE is updated as per latest design approvals and changed project locations of water supply and sewerage. 72.72%), whereas under sewer networks 31.23 km out of total proposed 68 km is approved (approx. 45.92%). The process described in this document has assessed the environmental impacts of all elements of the Sardarshahar water supply and sewerage subproject. All potential impacts were identified in relation to pre-construction, construction, and operation phases. Planning principles and design considerations have been reviewed and incorporated into the site planning and design process wherever possible; thus, environmental impacts as being due to the project design or location were not significant. During

the construction phase, impacts mainly arise from the construction dust and noise, the need to dispose of large quantities of waste soil and import a similar amount of construction material to support the sewer in the trenches; and from the disturbance of residents, businesses, traffic and important buildings by the construction work.

285. There are no environmentally or archeologically sensitive areas within Sardarshahar town. Nearest protected area to Sardarshahar is Tal Chhapar Wildlife Sanctuary; the sanctuary boundary is about 75 km from the town.

### **Source Sustainability**

286. Surface water source for town will be IGNP canal. The Town will receive treated water from IGNP canal and no new WTP is required for the project

287. Three STPs of capacities 2.30 MLD, 3.40 MLD and 1.60 MLD are designed based on SBR (sequential batch reactor) process, followed by disinfection. Upgradation of 2 existing STPs of 5 MLD and 2 MLD to achieve latest discharge standards is also designed in subproject. As the bid is DBO type, detailed design of the STP will be carried out by the contractor to the following specific discharge standards. Currently for STPs in India, the standards notified by Ministry of Environment, Forests and Climate Change (MOEFCC) in 2017 & subsequently latest NGT order dated 30.04.2019 are applicable. However, under RSTDSP, PMU has decided to base the STP design on discharge standards for STPs suggested by CPCB in 2015 & NGT order dated 30.04.2019, which are more stringent. The stringent standards also facilitate maximum utilization of treated wastewater for reuse in various purposes following the Sewerage and Wastewater Policy, 2016, of Rajasthan. The treated wastewater will be reused, and a Reuse plan will be prepared during the detailed design. Various measures are suggested for safe reuse of wastewater and sludge.

288. Designed STP sites are away from habitations and surrounded by agricultural lands. Some trees and shrubs are present at these sites. No habitation exists within 200 m. Treated wastewater which is excess / surplus of reuse will be disposed into disposal ponds. No impacts envisaged as the water courses are mostly dry and carries untreated wastewater except during monsoon.

289. Except water lines and sewer works, all other construction activities will be confined to the selected sites, and the interference with the general public and community around is minimal. There will be temporary negative impacts, arising mainly from construction dust and noise, hauling of construction material, waste and equipment on local roads (traffic, dust, safety etc.), mining of construction material, occupation health and safety aspects. Water pipes and sewer line works (194 km of water pipes and 68 km of sewers covering almost entire project area of Sardarshahar town) will be conducted along public roads in an urban area congested with people, activities and traffic, subproject is likely to significant impacts during construction. Impacts mainly arise from the construction dust and noise; from the disturbance of residents, businesses, traffic by the construction work, safety risk to workers, public and nearby buildings due to deep trench excavations, especially in narrow roads, dust, access impediment to houses and business, disposal of large quantities of construction waste, etc. These are all general impacts of construction in urban areas, and there are well developed methods of mitigation that are suggested in the EMP. Trenchless method will be adopted for sewers deeper than 3.5 m and also at main road crossings in traffic areas.

290. Subproject includes rehabilitation of existing infrastructure like tube wells, CWRs,

pumping stations and OHSRs. Presence of asbestos containing material (ACM), mainly AC pipes in the existing infrastructure is the main concern. Asbestos is recognized as a cause of various diseases and is considered health hazard if inhaled. Nearly 5 km of the existing pipes of underground water transmission and distribution system consists Asbestos Cement (AC) pipes of various diameter. In addition to this PHED campus has stock of AC pipes recovered from rural areas of Sardarshahar. It is normal practice in Rajasthan that existing AC pipes are left as it is in the ground and new pipes will be laid in a new alignment. However, complete avoidance of handling and disposal of AC pipes may not be possible. There are narrow lanes, where AC pipes may be encountered during the laying of new pipes. Some connections / inlet / outlet pipes at the existing CWRs are also of AC pipes. These will be removed and replaced with new non-AC pipes.

291. AC pipe as such is not hazardous as it is in the cement bonded form, however, handling AC pipes in manner that produces dust, fibers, air borne particles etc., is very harmful and hazardous to the workers and general public around the work sites. The condition of existing underground AC pipes is not known, however, as these are old, pipes may be in deteriorated conditions. Various measures are suggested including development and implementation of Asbestos Management Plan (AMP).

292. Once the new system is operating, the facilities will operate with routine maintenance, which should not affect the environment. Improved system operation will comply with the operation and maintenance manual and standard operating procedures to be developed for all the activities.

293. Mitigation will be assured by a program of environmental monitoring conducted during construction and operation to ensure that all measures are implemented, and to determine whether the environment is protected as intended. This will include observations on- and off-site, document checks, and interviews with workers and beneficiaries, and any requirements for remedial action will be reported to the PMU. There will also be longer-term surveys to monitor raw and treated water quality, treatment efficiency of STP (raw and treated sewage quality), sludge at STPs. Mitigation and monitoring measures, along with the project agency responsible for such actions, form part of the Environmental Management Plan.

294. Certain new initiatives have been taken in the project viz., promoting wastewater reuse, sludge reuse and contractor to work on private properties to provide sewerage connections. Hence, appropriate guidelines for these measures should be provided for these new initiatives. These could include viz., Guidelines for the ULBs for promoting wastewater reuse; Guidelines for the ULBs for sludge reuse; and Guidelines for the Contractors to work within the private properties. In the project, in a large portion of the project town areas, the septic tank system in individual households is replaced with direct connections to the new sewerage network. The impacts and mitigation measures from the existing septic tank that need to be closed should be identified in the Operation Phase

295. Stakeholders were involved in developing the IEE through face-to-face discussions, on site meetings, and a city level consultation workshop, which was conducted for larger public participation in the project. Views expressed by the stakeholders were incorporated into the IEE and the planning and development of the project. The IEE will be made available at public locations and will be disclosed to a wider audience via the PMU and ADB websites. The consultation process will be continued during project implementation to ensure that stakeholders are engaged in the project and have the opportunity to participate in its development and implementation. The project's grievance redress mechanism will provide the citizens with a



platform for redress their grievances, and describes the informal and formal channels, time frame, and mechanisms for resolving complaints about environmental performance.

296. The EMP was included in the bid and contract documents to ensure compliance with the conditions set out in this document. The contractor has to submitted to PIU, for review and approval, an updated EMP / site environmental management plan (SEMP) including (i) designed sites/locations for construction work camps, storage areas, hauling roads, lay down areas, disposal areas for solid and hazardous wastes; (ii) specific mitigation measures following the approved EMP; and (iii) monitoring program as per EMP. The EMP is made binding on all contractors operating on the site and was included in the contractual clauses. Non-compliance with, or any deviation from, the conditions set out in this document shall constitute a failure in compliance. No works can commence prior to approval of SEMP. A copy of the EMP/approved SEMP will always be kept on site during the construction period.

297. The citizens of the Sardarshahar will be the major beneficiaries of the improved water supply and sewerage systems. The subproject is primarily designed to improve environmental quality and living conditions of Sardarshahar town through provision of water supply and sewerage. The benefits arising from this subproject include: (i) increased availability of potable water at appropriate pressure to all households including urban poor; (ii) reduced time and costs in accessing alternative sources of water. (iii) better public health particularly reduction in waterborne and infectious diseases; (iv) reduced risk of groundwater contamination; (v) reduced risk of contamination of treated water supplies; and, (vi) improvement in quality of water bodies due to disposal of treated effluent meeting disposal standards.

298. Therefore, as per ADB SPS, the project is classified as environmental category B and does not require further environmental impact assessment. However, to conform to government guidelines STPs requires consent to establishment (CTE) and consent to operate (CTO) from Rajasthan State Pollution Control Board. CTE will be obtained prior to construction, as the detailed designs will be undertaken by contractor.

299. **Recommendations** The following are recommendations applicable to the subproject to ensure no significant impacts:.

**Recommendations already Implemented with this update:**

- Obtain all statutory clearances at the earliest time possible and ensure conditions/provisions are incorporated in the detailed design;- being implemented, consent to establish for WTP and STP already applied.
- Include this IEE in bid and contract documents;- implemented, the ADB approved Draft IEE is part of bid documents
- Conduct safeguards induction to the contractor upon award of contract;- safeguard induction done
- Strictly supervise EMP implementation;- being complied
- Ensure contractor appointed qualified environment, health and safety (EHS) officers prior to start of works;- complied
- Documentation and reporting on a regular basis as indicated in the IEE;- being complied
- Timely disclosure of information and establishment of GRM;- being implemented
- Involvement of contractors, including subcontractors, in first level GRM;- complied
- Commitment from PMU, PIUs, project consultants, and contractors to protect the environment and the people from any impact during project implementation.- PMU, PIUs and consultants are committed for the protection of environment

Recommendation to be implemented in next update/final IEE

- Update and implement the asbestos management plan per site-specific conditions;- currently no work are undergoing at sites, where ACMs can be encountered, ACM management plan shall be updated and included in final IEE
- Update and implement the recommendations from the biodiversity assessment report;- shall be updated and included in final IEE
- Ensure that sludge management protocols are compliant with environmental regulations (Solid Waste Management Rules 2000 and its amendments) and solid waste disposal should have a designated site (dumping on vacant lot is not allowed);- sludge management plan will be prepared, solid waste management plan is prepared and being implemented
- Secure permits for the abstraction of groundwater from additional wells;- shall be applied before establishment of Tube Wells

300. Draft IEE is updated as per change of scope/location and approval of designs. This IEE shall be further updated by PMU after detailed design phase to reflect any changes, amendments and will be reviewed and approved by ADB.

## Appendix2: Rapid Environmental Assessment (REA) Checklist

### Water Supply

#### Instructions:

(i) The project team completes this checklist to support the environmental classification of a project. It is to be attached to the environmental categorization form and submitted to the Environment and Safeguards Division (RSES) for endorsement by the Director, RSES and for approval by the Chief Compliance Officer.

(ii) This checklist focuses on environmental issues and concerns. To ensure that social dimensions are adequately considered, refer also to ADB's (a) checklists on involuntary resettlement and Indigenous Peoples; (b) poverty reduction handbook; (c) staff guide to consultation and participation; and (d) gender checklists.

(iii) Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. Use the "remarks" section to discuss any anticipated mitigation measures.

**Country/Project Title:** India/Rajasthan Secondary Towns Development Sector Project (RSTDSP)/Sardarshahar Water Supply and Wastewater Project, Distt. Churu, Rajasthan

**Sector Division:** Urban Development

| Screening Questions                                          | Yes | No | Remarks                                                                                                                                                     |
|--------------------------------------------------------------|-----|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A. Project siting<br>Is the project area...                  |     |    |                                                                                                                                                             |
| Densely populated?                                           | √   |    | Old part of the city is densely populated, whereas outer area is less dense. Water supply is proposed in all town including densely populated areas of town |
| Heavy with development activities?                           | √   |    | Sardarshahar is a developing town; urban expansion is considerable                                                                                          |
| Adjacent to or within any environmentally sensitive areas ?  |     | √  |                                                                                                                                                             |
| Cultural heritage site                                       |     | √  |                                                                                                                                                             |
| Protected area                                               |     | √  |                                                                                                                                                             |
| Wet subproject selection                                     |     | √  |                                                                                                                                                             |
| Mangrove                                                     |     | √  |                                                                                                                                                             |
| Estuarine                                                    |     | √  |                                                                                                                                                             |
| Buffer Zone of Protected Area                                |     | √  |                                                                                                                                                             |
| Special area for Protecting Biodiversity                     |     | √  |                                                                                                                                                             |
| Bay                                                          |     | √  |                                                                                                                                                             |
| Potential Environmental Impacts<br>Will the Project cause... |     |    |                                                                                                                                                             |
| Pollution of raw water supply from                           |     | √  | <b>Not anticipated.</b> There is no wastewater or                                                                                                           |

| Screening Questions                                                                                                    | Yes | No | Remarks                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------|-----|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| upstream wastewater discharge from communities, industries, agriculture, and soil erosion runoff ?                     |     |    | effluent discharge into the upstream sources and are thus not expected to induce pollution of raw water supply.<br>Main Source of Sardarshahar town water supply is Indira Gandhi water canal from thereon Sahwa lift Canal emanate which is used to feed water to the existing WTP of 70 MLD capacity at Dhannasar (Dhannasar Water Treatment Plant)                                                            |
| Impairment of historical/cultural monuments/areas and loss/damage to these sites?                                      |     | √  | <b>Not anticipated.</b> No above-ground infrastructures will be built within or adjacent to PCRs. Only pipe laying will be done outside and around PCRs. The HIA specify the requirements before and during construction to ensure that no loss or damage will be done on these PCRs.                                                                                                                            |
| Hazard of land subsidence caused by excessive ground water pumping?                                                    |     | √  | <b>Not anticipated.</b> Any groundwater source (e.g. tube wells), will require permission from Rajasthan Ground Water Board and conduct of feasibility/source sustainability studies prior to consideration as a source.                                                                                                                                                                                         |
| Social conflicts arising from displacement of communities?                                                             |     | √  | <b>Not anticipated.</b> Project does not involve any land acquisition. A Resettlement Plan will be prepared if there are any involuntary resettlement.                                                                                                                                                                                                                                                           |
| Conflicts in abstraction of raw water for water supply with other beneficial water uses for surface and ground waters? |     | √  | <b>Not anticipated.</b> Water allocation letters from the Public Health Engineering Department (PHED) and Rajasthan Groundwater Department are required, and only allocated water shall be used for the water supply subprojects.                                                                                                                                                                                |
| Unsatisfactory raw water supply (e.g. excessive pathogens or mineral constituents)?                                    | √   |    | <b>Not anticipated.</b> Efficient treatment technology and water quality laboratories are included in scope of water supply subprojects.<br>Raw water shall be taken from Indira Gandhi Canal, which may contain pathogens or mineral constituents, for which sufficient treatment of raw water is being done at Dhannasar WTP, from where treated water shall be supplied for Sardarshahar Water Supply project |
| Delivery of unsafe water to distribution system?                                                                       | √   |    | <b>Not anticipated.</b>                                                                                                                                                                                                                                                                                                                                                                                          |
| Inadequate protection of intake works or wells, leading to pollution of water supply?                                  | √   |    | <b>Not applicable. PHED is already taking care for protection of intake works at Indira Gandhi Canal</b>                                                                                                                                                                                                                                                                                                         |
| Over pumping of ground water, leading to salinization and ground subsidence?                                           |     | √  | <b>Not anticipated.</b> Groundwater extraction shall be limited to the sustainable levels as indicated in the permits provided by the Groundwater Department.                                                                                                                                                                                                                                                    |
| Excessive algal growth in storage reservoir?                                                                           | √   |    | <b>Not anticipated.</b> Design specifications confirm maintenance requirements to                                                                                                                                                                                                                                                                                                                                |

| Screening Questions                                                                                                                                                                                     | Yes | No | Remarks                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                         |     |    | ensure no algal growth in tanks and reservoir.                                                                                                                                                                                                                                                                                                                                                                                                            |
| Increase in production of sewage beyond capabilities of community facilities?                                                                                                                           | √   |    | <b>Not anticipated.</b> Sewerage systems and demand requirements are accounted for. The project will include improvement of sewerage and sanitation systems.                                                                                                                                                                                                                                                                                              |
| Inadequate disposal of sludge from water treatment plants?                                                                                                                                              | √   |    | <b>Not anticipated.</b> Facilities to manage sludge and solid wastes (grit) are included in the design. The IEEs and Operations and Maintenance (O&M) manuals will include handling and disposal procedures.                                                                                                                                                                                                                                              |
| Inadequate buffer zone around pumping and treatment plants to alleviate noise and other possible nuisances and protect facilities?                                                                      | √   |    | <b>Not anticipated.</b> Low noise pumps and machineries will be used in pumping stations to alleviate noise to nearby areas.                                                                                                                                                                                                                                                                                                                              |
| Impairments associated with transmission lines and access roads?                                                                                                                                        | √   |    | <b>Anticipated during construction only.</b> Complete road closures are not expected, and traffic may be diverted with access ensured for pedestrians. Contractors are required to incorporate in the Traffic Management Plan as part of the site-specific EMP (SEMP).                                                                                                                                                                                    |
| Health hazards arising from inadequate design of facilities for receiving, storing, and handling of chlorine and other hazardous chemicals.                                                             | √   |    | <b>Anticipated but can be mitigated.</b> Potential hazards during O&M phase are identified and mitigation measures in place. Chlorine will be handled by qualified personnel with the proper handling techniques and proper PPE. No other hazardous chemical will be maintained.                                                                                                                                                                          |
| health and safety hazards to workers from handling and management of chlorine used for disinfection, other contaminants, and biological and physical hazards during project construction and operation? | √   |    | <b>Anticipated but can be mitigated.</b> Potential hazards during O&M phase are identified and mitigation measures in place. Chlorine will be handled by qualified personnel with the proper handling techniques and proper PPE. No other hazardous chemical will be maintained.                                                                                                                                                                          |
| Dislocation or involuntary resettlement of people                                                                                                                                                       |     | √  | <b>Anticipated but can be mitigated.</b> Any involuntary resettlement is addressed by the resettlement framework.                                                                                                                                                                                                                                                                                                                                         |
| disproportionate impacts on the poor, women and children, Indigenous Peoples or other vulnerable groups?                                                                                                |     | √  | <b>Not anticipated.</b> Contractor is encouraged to hire workers from the local labor force.                                                                                                                                                                                                                                                                                                                                                              |
| Noise and dust from construction activities?                                                                                                                                                            | √   |    | <b>Anticipated but temporary, site-specific and can be mitigated.</b> No blasting activities envisaged. Nuisance or disturbance due to elevated noise may be experienced during construction. All the machineries employed will comply with the noise emission standards of the Central Pollution Control Board. Dust suppression measures such as water sprinkling will be employed. These requirements and monitoring of effectivity should be included |

| Screening Questions                                                                                                                                                                                                  | Yes | No | Remarks                                                                                                                                                                                                                                                                                         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                      |     |    | in the site-specific EMP.                                                                                                                                                                                                                                                                       |
| Increased road traffic due to interference of construction activities?                                                                                                                                               | √   |    | <b>Anticipated but temporary, site-specific and can be mitigated.</b> Complete road closures are not expected, and traffic may be diverted with access ensured for pedestrians. Contractors are required to incorporate in the Traffic Management Plan as part of the site-specific EMP (SEMP). |
| Continuing soil erosion/silt runoff from construction operations?                                                                                                                                                    | √   |    | <b>Anticipated but temporary, site-specific and can be mitigated.</b> Construction work during monsoon shall be carried out such that silt run off is prevented. SEMP's include requirement for contractors to provide silt control measures.                                                   |
| Delivery of unsafe water due to poor O&M treatment processes (especially mud accumulations in filters) and inadequate chlorination due to lack of adequate monitoring of chlorine residuals in distribution systems? | √   |    | <b>Not anticipated.</b> Water treatment plans are designed with on-site and timely monitoring to ensure the quality of treated water prior delivery to the households. The drinking water quality parameters and acceptable levels are included in the contract.                                |
| Delivery of water to distribution system, which is corrosive due to inadequate attention to feeding of corrective chemicals?                                                                                         |     | √  | <b>Not anticipated.</b> Treated water will be tested prior distribution.                                                                                                                                                                                                                        |
| Accidental leakage of chlorine gas?                                                                                                                                                                                  | √   |    | <b>Not anticipated.</b> Proper Occupational Health and Safety (OHS) handling and storage of chlorine is included in the requirements                                                                                                                                                            |
| Excessive abstraction of water affecting downstream water users?                                                                                                                                                     |     | √  | <b>Not anticipated.</b> Only water allocated by the Government will be used for the water supply services.                                                                                                                                                                                      |
| Competing uses of water?                                                                                                                                                                                             |     | √  | <b>Not anticipated.</b> Water used for the project are specifically allocated by the Government for the project's purpose. Only the water allocated will be used.                                                                                                                               |
| Increased sewage flow due to increased water supply                                                                                                                                                                  | √   |    | <b>Not anticipated.</b> Sewerage systems and demand requirements are accounted for in the analysis. The project will include improvement of sewerage and sanitation systems.                                                                                                                    |
| large population influx during project construction and operation that causes increased burden on social infrastructure and services (such as water supply and sanitation systems)?                                  |     | √  | <b>Not anticipated.</b> Contractors shall prioritize hiring local labor force. Some of the skilled workers may be brought from outside but numbers should not be so large to have impacts on social services.                                                                                   |
| social conflicts if workers from other regions or countries are hired?                                                                                                                                               |     | √  | <b>Not anticipated.</b> Contractors shall prioritize hiring local labor force. Some of the skilled workers may be brought from outside but numbers should not be so large to have impacts on social services.                                                                                   |
| risks to community health and safety due to the transport, storage, and use and/or disposal of materials such as                                                                                                     |     | √  | <b>Anticipated but temporary, site-specific and can be mitigated.</b> Construction does not involve use of explosives. EMP's include                                                                                                                                                            |

| Screening Questions                                                                                                                                                                                                                                                                                                         | Yes | No | Remarks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| explosives, fuel and other chemicals during operation and construction?                                                                                                                                                                                                                                                     |     |    | measures and monitoring requirements on occupational health and safety for chemical hazards.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| community safety risks due to both accidental and natural hazards, especially where the structural elements or components of the project are accessible to members of the affected community or where their failure could result in injury to the community throughout project construction, operation and decommissioning? | √   |    | <b>Anticipated but temporary, site-specific and can be mitigated.</b> Work area will be clearly demarcated with security access for the workers and project-concerned members only. Community health and safety risks are present during construction such as risks from excavations for pipe laying, equipment and vehicle operations which should be identified and implemented in the site-specific EMPs. Asbestos-containing materials are observed in project sites and are known to be in-situ underground. Such asbestos materials will be handled in accordance to the Asbestos Management Plan including reporting and documentations. |

### A Checklist for Preliminary Climate Risk Screening

**Country/Project Title:** India/Rajasthan Secondary Towns Development Sector Project (RSTDSP), Sardarshahar, Rajasthan  
**Sector :** Urban Development  
**Subsector:** Water Supply  
**Division/Department:** SARD/SAUW

| Screening Questions            |                                                                                                                                                                                                | Score | Remarks <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Location and Design of project | Is siting and/or routing of the project (or its components) likely to be affected by climate conditions including extreme weather related events such as floods, droughts, storms, landslides? | 2     | The subproject sites in Rajasthan are highly sensitive to fluctuations in rainfall and increases in temperatures. Some project locations may experience drought during dry season. Adequate measures such as installation of rainwater harvesting, minimization of non-revenue water and pressure control mechanisms (for improved asset management) will be included in the designs to safeguard facilities from extreme events. |

<sup>2</sup>If possible, provide details on the sensitivity of project components to climate conditions, such as how climate parameters are considered in design standards for infrastructure components, how changes in key climate parameters and sea level might affect the siting/routing of project, the selection of construction material and/or scheduling, performances and/or the maintenance cost/scheduling of project outputs.



|                                |                                                                                                                                                                                                                                                                                                                                            |   |                                                                                                                                                                                                                                                                                                                 |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                | Would the project design (e.g. the clearance for bridges) need to consider any hydro-meteorological parameters (e.g., sea-level, peak river flow, reliable water level, peak wind speed etc)?                                                                                                                                              | 0 |                                                                                                                                                                                                                                                                                                                 |
| Materials and Maintenance      | Would weather, current and likely future climate conditions (e.g. prevailing humidity level, temperature contrast between hot summer days and cold winter days, exposure to wind and humidity hydro-meteorological parameters likely affect the selection of project inputs over the life of project outputs (e.g. construction material)? | 0 |                                                                                                                                                                                                                                                                                                                 |
|                                | Would weather, current and likely future climate conditions, and related extreme events likely affect the maintenance (scheduling and cost) of project output(s) ?                                                                                                                                                                         | 0 |                                                                                                                                                                                                                                                                                                                 |
| Performance of project outputs | Would weather/climate conditions, and related extreme events likely affect the performance (e.g. annual power production) of project output(s) (e.g. hydro-power generation facilities) throughout their design life time?                                                                                                                 | 1 | Extreme weather conditions may disrupt regular operations of water treatment and sewage treatment plants. Moreover, components require continuous power to operate that may be affected by low precipitation conditions. Back-up powers (such as solar panels) may be provided in cases of such extreme events. |

Options for answers and corresponding score are provided below:

| Response    | Score |
|-------------|-------|
| Not Likely  | 0     |
| Likely      | 1     |
| Very Likely | 2     |

Responses when added that provide a score of 0 will be considered low risk project. If adding all responses will result to a score of 1-4 and that no score of 2 was given to any single response, the project will be assigned a medium risk category. A total score of 5 or more (which include providing a score of 1 in all responses) or a 2 in any single response will be categorized as high risk project.

Result of Initial Screening (Low, Medium, High): High risk

Other Comments: None

|                           |
|---------------------------|
| <b>Sewerage Treatment</b> |
|---------------------------|

**Instructions:**

The project team completes this checklist to support the environmental classification of a project. It is to be attached to the environmental categorization form and submitted to the Environment and Safeguards Division (RSES) for endorsement by the Director, RSES and for approval by the Chief Compliance Officer.

This checklist focuses on environmental issues and concerns. To ensure that social dimensions are adequately considered, refer also to ADB checklists and handbooks on (i) involuntary resettlement, (ii) indigenous peoples planning, (iii) poverty reduction, (iv) participation, and (v) gender and development.

Answer the questions assuming the “without mitigation” case. The purpose is to identify potential impacts. Use the “remarks” section to discuss any anticipated mitigation measures.

**Country/Project Title:** India/Water supply and Sewerage Project in Sardarshahar Town, Rajasthan

**Sector Division:** Urban Development

| SCREENING QUESTIONS                                        | Yes | No | REMARKS                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------------|-----|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>A. Project Siting</b>                                   |     |    |                                                                                                                                                                                                                                                                                                                                                            |
| <b>Is the project area...</b>                              |     |    |                                                                                                                                                                                                                                                                                                                                                            |
| Densely populated?                                         | √   |    | Subproject activities extend to the entire town including the densely populated areas. There are no major negative impacts envisaged, because pipeline will be located within ROW alongside the existing roads and can be constructed without causing disturbance to, houses, and commercial establishments. STP site is sufficient away from habitations. |
| Heavy with development activities?                         | √   |    | Sardarshahar is a developing town with continuous urban expansion, there are no major industries and mostly business and service are the common occupations                                                                                                                                                                                                |
| Adjacent to or within any environmentally sensitive areas? |     | √  | There are no environmental sensitive areas near the proposed sites.                                                                                                                                                                                                                                                                                        |
| Cultural heritage site                                     |     | √  | There are no cultural heritage site listed under state archeology department or ASI                                                                                                                                                                                                                                                                        |
| Protected Area                                             |     | √  |                                                                                                                                                                                                                                                                                                                                                            |
| Wetland                                                    |     | √  |                                                                                                                                                                                                                                                                                                                                                            |
| Mangrove                                                   |     | √  |                                                                                                                                                                                                                                                                                                                                                            |
| Estuarine                                                  |     | √  |                                                                                                                                                                                                                                                                                                                                                            |

| SCREENING QUESTIONS                                                                                                                                             | Yes | No | REMARKS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Buffer zone of protected area                                                                                                                                   |     | √  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Special area for protecting biodiversity                                                                                                                        |     | √  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Bay                                                                                                                                                             |     | √  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>B. Potential Environmental Impacts</b>                                                                                                                       |     |    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Will the Project cause...</b>                                                                                                                                |     |    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Impairment of historical/cultural monuments/areas and loss/damage to these sites?                                                                               |     | √  | <b>Not applicable.</b> There are no cultural heritage sites of prominence. There are religious places of importance. However, the project will not interfere with these places                                                                                                                                                                                                                                                                                                                              |
| Interference with other utilities and blocking of access to buildings; nuisance to neighboring areas due to noise, smell, and influx of insects, rodents, etc.? | √   |    | <b>Anticipated during construction and operations but can be avoided and mitigated.</b> Sewage treatment plants' design include considerations to minimize, if not reduce, the nuisance to the nearby communities and comply with noise and odor standards. During construction, sewers will be laid underground and may interfere temporarily with access and other utilities. Coordination with the concerned agencies will be conducted in finalizing alignment and shifting of utilities, if necessary. |
| Dislocation or involuntary resettlement of people                                                                                                               | √   |    | <b>Not anticipated.</b> Project does not involve any land acquisition. A Resettlement Plan will be prepared if there are any involuntary resettlement.                                                                                                                                                                                                                                                                                                                                                      |
| Disproportionate impacts on the poor, women and children, Indigenous Peoples or other vulnerable groups?                                                        |     | √  | <b>Not anticipated.</b> Contractors shall prioritize hiring local labor force. Some of the skilled workers may be brought from outside but numbers should not be so large to have impacts on social services.                                                                                                                                                                                                                                                                                               |
| Impairment of downstream water quality due to inadequate sewage treatment or release of untreated sewage?                                                       |     | √  | <b>Not anticipated.</b> Treated effluents from the STP will be utilized in agriculture or similar uses and comply with the State's Reuse policy.                                                                                                                                                                                                                                                                                                                                                            |
| Overflows and flooding of neighboring properties with raw sewage?                                                                                               |     | √  | <b>Not anticipated.</b> Risks, climate change factors and forecasted demands are considered in the design and capacity of the sewerage systems.                                                                                                                                                                                                                                                                                                                                                             |
| Environmental pollution due to inadequate sludge disposal or industrial waste discharges illegally disposed in sewers?                                          | √   |    | <b>Not anticipated.</b> Designs include sludge collection, handling, treatment and disposal. Standards are provided for the use of sludge as manure. Sewerage system design ensure no industrial effluent will be allowed into the network.                                                                                                                                                                                                                                                                 |

| SCREENING QUESTIONS                                                                                                                                              | Yes | No | REMARKS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Noise and vibration due to blasting and other civil works?                                                                                                       |     | √  | <b>Anticipated but temporary, site-specific and can be mitigated.</b> Blasting for underground works is prohibited in RUDSICO. Nuisance or disturbance due to noise may be experienced but minimized with mitigation measures specified in the EMPs. Scheduling of works and prior information with the affected people will be conducted.                                                                                                                                                                                                                                                                                                                                        |
| Risks and vulnerabilities related to occupational health and safety due to physical, chemical, and biological hazards during project construction and operation? | √   |    | <b>Anticipated but temporary, site-specific and can be mitigated.</b> EMPs and contract provisions include requirements for an Occupational Health and Safety (OHS) plan. The contractor's OHS plan shall be reviewed and cleared by the PIUs prior to commencement of works.                                                                                                                                                                                                                                                                                                                                                                                                     |
| Discharge of hazardous materials into sewers, resulting in damage to sewer system and danger to workers?                                                         |     | √  | <b>Not anticipated.</b> Sewerage system only caters to domestic waters, no industrial wastewater is allowed into the system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Inadequate buffer zone around pumping and treatment plants to alleviate noise and other possible nuisances, and protect facilities?                              | √   |    | <b>Not anticipated.</b> STPs will be isolated through boundary walls and dense plantations to avoid/minimize nuisance.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Road blocking and temporary flooding due to land excavation during the rainy season?                                                                             | √   |    | <b>Anticipated during construction but temporary, site-specific and can be mitigated.</b> Road blocking for pipe laying works may be required and mitigation measures are required as per IEE/EMP. Underground construction works (sewer laying, foundations) should be carried out in non-monsoon period to avoid flooding.                                                                                                                                                                                                                                                                                                                                                      |
| Noise and dust from construction activities?                                                                                                                     | √   |    | <b>Anticipated during construction but temporary, site-specific and can be mitigated.</b> No major noise-generating activities like rock blasting is anticipated. As the sewers will be laid on the road surface, cutting open of road surface using pneumatic drills will produce noise and dust. Temporary nuisance/disturbance due to noise and dust may be experienced by sensitive receptors. These impacts will be minimized with mitigation measures specified in the EMPs. During operations, noise may be experienced by sensitive receptors due to STP operations. This impact will be avoided by including noise barriers and enclosure of noise-producing components. |

| SCREENING QUESTIONS                                                                                                                                                 | Yes | No | REMARKS                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Traffic disturbances due to construction material transport and wastes?                                                                                             | √   |    | <b>Anticipated during construction but temporary, site-specific and can be mitigated.</b> Linear activities like sewer laying along the roads is likely to disrupt traffic. Vehicle movement for construction purpose will increase the traffic. Identification of alternate routes, allowing limited - at least one-way traffic, prior information about the works and alternative arrangements, providing information/sign boards etc. will reduce the impact. |
| Temporary silt runoff due to construction?                                                                                                                          | √   |    | <b>Anticipated during construction but temporary, site-specific and can be mitigated.</b> EMPs and contract provisions include requirement for contractors to provide silt control measures.                                                                                                                                                                                                                                                                     |
| Hazards to public health due to overflow flooding, and groundwater pollution due to failure of sewerage system?                                                     | √   |    | <b>Not anticipated.</b> Adequately trained staff and necessary equipment will be in place for regular operation and maintenance of the system. Proposed treatment system will be efficient and appropriate repair and maintenance procedure will be developed. Sufficient funds for operation will be ensured. Backup power supply system is part of project.                                                                                                    |
| deterioration of water quality due to inadequate sludge disposal or direct discharge of untreated sewage water?                                                     | √   |    | <b>Not anticipated.</b> STP designs include sludge handling and treatment facilities to state policy standards.                                                                                                                                                                                                                                                                                                                                                  |
| contamination of surface and ground waters due to sludge disposal on land?                                                                                          | √   |    | <b>Not anticipated.</b> STP designs include sludge handling and treatment facilities to state policy standards. O&M manual includes testing procedures and acceptable parameters for disposal on land.                                                                                                                                                                                                                                                           |
| Health and safety hazards to workers from toxic gases and hazardous materials which may be contained in sewage flow and exposure to pathogens in sewage and sludge? | √   |    | <b>Anticipated during operation but temporary, site-specific and can be mitigated.</b> Workers may be exposed during cleaning of blockages in sewerage network. However, O&M Manuals will include standard operating procedures. All necessary health and safety training and personal protection equipment will be given to workers and staff during operation of sewerage system. Implementation of contractors' H&S will be strictly enforced by the PIUs.    |
| large population increase during project construction and operation that causes increased burden on social infrastructure (such as sanitation system)?              |     | √  | <b>Not anticipated.</b> Most of the unskilled workers will be hired from local labor force. Some skilled workers may be brought from outside, but numbers will not be so large to have impacts on social infrastructure.                                                                                                                                                                                                                                         |

| SCREENING QUESTIONS                                                                                                                                                                                                                                                                                                         | Yes | No | REMARKS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Social conflicts between construction workers from other areas and community workers?                                                                                                                                                                                                                                       |     | √  | <b>Not anticipated.</b> Most of the unskilled workers will be hired from local labor force. Some skilled workers may be brought from outside, but numbers will not be so large to have impacts on social infrastructure. No conflicts envisaged.                                                                                                                                                                                                                                                                                                                                                                      |
| risks to community health and safety due to the transport, storage, and use and/or disposal of materials such as explosives, fuel and other chemicals during construction and operation?                                                                                                                                    |     | √  | <b>Anticipated but temporary, site-specific and can be mitigated.</b> Construction will not involve use of explosives and chemicals. During operations, chemicals such as pH adjusters, flocculants, or coagulants may be used. The complete list of chemicals, quantities, and requirements for safe use and storage will be included in the final IEE for the STPs (these are design-build-operate packages). The EMPs in the current IEEs already include measures and monitoring requirements conforming with IFC EHS Guidelines. O&M Manuals will include health and safety requirements for managing chemicals. |
| community safety risks due to both accidental and natural hazards, especially where the structural elements or components of the project are accessible to members of the affected community or where their failure could result in injury to the community throughout project construction, operation and decommissioning? | √   |    | <b>Anticipated but temporary, site-specific and can be mitigated.</b> Work area will be clearly demarcated with security access for the workers and project-concerned members only. Community health and safety risks are present during construction such as risks from excavations for pipe laying, equipment and vehicle operations which should be identified and implemented in the site-specific EMPs.                                                                                                                                                                                                          |

### A Checklist for Preliminary Climate Risk Screening

**Country/Project Title:** India/Rajasthan Secondary Towns Development Sector Project (RSTDSP), Sardarshahar, Rajasthan  
**Sector :** Urban Development  
**Subsector:** Waste Water  
**Division/Department:** SARD/SAUW

| Screening Questions            |                                                                                                                           | Score | Remarks <sup>3</sup>                                                                                |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------|-------|-----------------------------------------------------------------------------------------------------|
| Location and Design of project | Is siting and/or routing of the project (or its components) likely to be affected by climate conditions including extreme | 2     | The subproject sites in Rajasthan are highly sensitive to fluctuations in rainfall and increases in |

<sup>3</sup> If possible, provide details on the sensitivity of project components to climate conditions, such as how climate parameters are considered in design standards for infrastructure components, how changes in key climate parameters and sea level might affect the siting/routing of project, the selection of construction material and/or scheduling, performances and/or the maintenance cost/scheduling of project outputs.

|                                |                                                                                                                                                                                                                                                                                                                                            |   |                                                                                                                                                                                                                                                                                                                               |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                | weather related events such as floods, droughts, storms, landslides?                                                                                                                                                                                                                                                                       |   | temperatures. Some project locations may experience drought during dry season. Adequate measures such as installation of rainwater harvesting, minimization of non-revenue water and pressure control mechanisms (for improved asset management) will be included in the designs to safeguard facilities from extreme events. |
|                                | Would the project design (e.g. the clearance for bridges) need to consider any hydro-meteorological parameters (e.g., sea-level, peak river flow, reliable water level, peak wind speed etc)?                                                                                                                                              | 0 |                                                                                                                                                                                                                                                                                                                               |
| Materials and Maintenance      | Would weather, current and likely future climate conditions (e.g. prevailing humidity level, temperature contrast between hot summer days and cold winter days, exposure to wind and humidity hydro-meteorological parameters likely affect the selection of project inputs over the life of project outputs (e.g. construction material)? | 0 |                                                                                                                                                                                                                                                                                                                               |
|                                | Would weather, current and likely future climate conditions, and related extreme events likely affect the maintenance (scheduling and cost) of project output(s) ?                                                                                                                                                                         | 0 |                                                                                                                                                                                                                                                                                                                               |
| Performance of project outputs | Would weather/climate conditions, and related extreme events likely affect the performance (e.g. annual power production) of project output(s) (e.g. hydro-power generation facilities) throughout their design life time?                                                                                                                 | 1 | Extreme weather conditions may disrupt regular operations of water treatment and sewage treatment plants. Moreover, components require continuous power to operate that may be affected by low precipitation conditions. Back-up powers (such as solar panels) may be provided in cases of such extreme events.               |

Options for answers and corresponding score are provided below:

| Response    | Score |
|-------------|-------|
| Not Likely  | 0     |
| Likely      | 1     |
| Very Likely | 2     |

Responses when added that provide a score of 0 will be considered low risk project. If adding all responses will result to a score of 1-4 and that no score of 2 was given to any single response, the project will be assigned a medium risk category. A total score of 5 or more (which include providing a score of 1 in all responses) or a 2 in any single response will be categorized as high risk project.

Result of Initial Screening (Low, Medium, High): High

Other Comments: None

**Appendix 3: Drinking water standards**

| Group       | National Standards for Drinking Water <sup>a</sup> |             |                                             | WHO Guidelines for Drinking-Water Quality, 4 <sup>th</sup> Edition, 2011 <sup>b</sup> | Applicable Per ADB SPS <sup>c, d</sup>      |
|-------------|----------------------------------------------------|-------------|---------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------|
|             | Parameter                                          | Unit        | Max. Concentration Limits <sup>d</sup>      |                                                                                       |                                             |
| Physical    | Turbidity                                          | NTU         | 1 (5)                                       | -                                                                                     | 1 (5)                                       |
|             | pH                                                 |             | 6.5 – 8.5                                   | none                                                                                  | 6.5 – 8.5                                   |
|             | Color                                              | Hazen units | 5 (15)                                      | none                                                                                  | 5 (15)                                      |
|             | Taste and Odor                                     |             | Agreeable                                   | -                                                                                     | Agreeable                                   |
|             | TDS                                                | mg/l        | 500 (2,000)                                 | -                                                                                     | 500 (2,000)                                 |
|             | Iron                                               | mg/l        | 0.3                                         | -                                                                                     | 0.3                                         |
|             | Manganese                                          | mg/l        | 0.1 (0.3)                                   | -                                                                                     | 0.1 (0.3)                                   |
|             | Arsenic                                            | mg/l        | 0.01 (0.05)                                 | 0.01                                                                                  | 0.01                                        |
|             | Cadmium                                            | mg/l        | 0.003                                       | 0.003                                                                                 | 0.003                                       |
|             | Chromium                                           | mg/l        | 0.05                                        | 0.05                                                                                  | 0.05                                        |
|             | Cyanide                                            | mg/l        | 0.05                                        | none                                                                                  | 0.05                                        |
|             | Fluoride                                           | mg/l        | 1 (1.5)                                     | 1.5                                                                                   | 1 (1.5)                                     |
|             | Lead                                               | mg/l        | 0.01                                        | 0.01                                                                                  | 0.01                                        |
|             | Ammonia                                            | mg/l        | 0.5                                         | none established                                                                      | 0.5                                         |
| Chemical    | Chloride                                           | mg/l        | 250 (1,000)                                 | none established                                                                      | 250 (1,000)                                 |
|             | Sulphate                                           | mg/l        | 200 (400)                                   | none                                                                                  | 200 (400)                                   |
|             | Nitrate                                            | mg/l        | 45                                          | 50                                                                                    | 45                                          |
|             | Copper                                             | mg/l        | 0.05 (1.5)                                  | 2                                                                                     | 0.05 (1.5)                                  |
|             | Total Hardness                                     | mg/l        | 200 (600)                                   | -                                                                                     | 200 (600)                                   |
|             | Calcium                                            | mg/l        | 75 (200)                                    | -                                                                                     | 75 (200)                                    |
|             | Zinc                                               | mg/l        | 5 (15)                                      | none established                                                                      | 5 (15)                                      |
|             | Mercury                                            | mg/l        | 0.001                                       | 0.006                                                                                 | 0.001                                       |
|             | Aluminum                                           | mg/l        | 0.1 (0.3)                                   | none established                                                                      | 0.1 (0.3)                                   |
|             | Residual Chlorine                                  | mg/l        | 0.2                                         | 5                                                                                     | 0.2                                         |
| Micro Germs | E-coli                                             | MPN/100ml   | Must not be detectable in any 100 ml sample | Must not be detectable in any 100 ml sample                                           | Must not be detectable in any 100 ml sample |
|             | Total Coliform                                     | MPN/100ml   |                                             |                                                                                       |                                             |

<sup>a</sup> Bureau of India Standard 10500: 2012.<sup>b</sup> Health-based guideline values.<sup>c</sup> Per ADB SPS, the government shall achieve whichever of the standards is more stringent. If less stringent levels or measures are appropriate in view of specific project circumstances, the executing agency of the government will provide full and detailed justification for any proposed alternatives that are consistent with the requirements presented in ADB SPS.<sup>d</sup> Figures in parenthesis are maximum limits allowed in the absence of alternate source.



#### Appendix 4: Compliance with Environmental Criteria for Subproject Selection

| Components             | Criteria                                                                                                                                                                                                                                                                                                                   | Design Considerations<br>(if criterion is not met)                  | Compliance                                                                                                                                                                      |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>All subprojects</b> |                                                                                                                                                                                                                                                                                                                            |                                                                     |                                                                                                                                                                                 |
|                        | Subproject will avoid potentially significant adverse impacts that are diverse, irreversible or unprecedented (ADB SPS Category A for environment).                                                                                                                                                                        |                                                                     | Being complied, the proposed components of subproject are proposed in already developed area and all impacts are predictable and mitigation measures are part of project design |
|                        | Comply with all requirements of ADB SPS 2009 and follow procedures set in this environmental assessment and review framework (EARF)                                                                                                                                                                                        |                                                                     | Being complied                                                                                                                                                                  |
|                        | Comply with relevant national, and local laws, rules and regulations regarding EIA, environmental protection, pollution prevention (water, air, noise, solid waste, etc.) wildlife protection, core labor standards, physical cultural resources, health and safety, and other laws in specific sectors as indicated below |                                                                     | Being complied                                                                                                                                                                  |
|                        | Does not include and/or involve any activities listed in ADB's Prohibited Investment Activities List <sup>1</sup>                                                                                                                                                                                                          |                                                                     | Being complied                                                                                                                                                                  |
|                        | Reflect inputs from public consultations                                                                                                                                                                                                                                                                                   | Refer to ADB SPS requirements on meaning consultations <sup>2</sup> | Being complied                                                                                                                                                                  |
| Location               | Avoid involuntary resettlement by prioritizing rehabilitation over new construction using vacant government land where possible, and taking all possible measures in design and selection of site or alignment to avoid resettlement impacts                                                                               | If cannot be avoided, prepare Resettlement Plan.                    | Being complied                                                                                                                                                                  |
|                        | Avoid or minimize the cutting of                                                                                                                                                                                                                                                                                           | If tree is to be cut, consider                                      | Being complied                                                                                                                                                                  |

<sup>1</sup>ADB SPS Appendix 5

<sup>2</sup>Per ADB SPS, meaningful consultation is defined as “a process that (i) begins early in the project preparation stage and is carried out on an ongoing basis throughout the project cycle; (ii) provides timely disclosure of relevant and adequate information that is understandable and readily accessible to affected people; (iii) is undertaken in an atmosphere free of intimidation or coercion; (iv) is gender inclusive and responsive, and tailored to the needs of disadvantaged and vulnerable groups; and (v) enables the incorporation of all relevant views of affected people and other stakeholders into decision making, such as project design, mitigation measures, the sharing of development benefits and opportunities, and implementation issues”

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                             |                |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
|                             | trees                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1:3 replacement                                                                                                                                                                                                                                                                                                                                                             |                |
| Biodiversity                | <p>Avoid locating subprojects in critical habitats, such as, but not limited to, wildlife/bird sanctuaries, national parks, tiger reserves, elephant reserves, conservation reserves or core zone of biosphere reserves. Appendix 1 provides preliminary analysis using the International Biodiversity Assessment Tool (IBAT) key biodiversity areas, protected areas, IUCN red list species and likelihood of critical habitats per town.</p> <p>Should not directly affect environmentally protected areas, core zones of biosphere reserves and highly valued habitat</p> | <p>If criteria is not met, this is potential for Category A therefore alternate location should be considered. A Biodiversity Expert shall assess and confirm critical habitat qualification. Appendix 2 (of EARF) provides a Biodiversity Assessment Report prepared for a sample subproject (Abu Road water and sewerage subproject).</p>                                 | Being complied |
|                             | <p>If work is proposed with the aim of improving the conservation or management of designated subproject sites (e.g. improved drainage), this must only be undertaken: (i) after a comprehensive study and development of management plans and criteria; and (ii) with the direct involvement and approval of national and local bodies responsible for the subproject site.</p>                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                             | Being complied |
| Physical Cultural Resources | <p>Should not result in the destruction/damage of or encroachment onto physical cultural resources (PCR)<sup>3</sup> such as archaeological monuments; heritage sites and movable or immovable objects, sites, structures, group of structures, and natural features and landscapes that have archaeological, paleontological, historical, architectural, religious, aesthetic or other cultural significance.</p>                                                                                                                                                           | <p>If location is within 300 m of notified protected monuments/ sites and there is no alternative, permissions from the ASI or State Department of Archaeology to be obtained prior to finalization of detailed engineering design. If potential physical cultural resources are found within or adjacent to project sites, a Heritage Impact Assessment is required to</p> | Being complied |

<sup>3</sup> Physical cultural resources as defined as “movable or immovable objects, sites, structures, groups of structures, and natural features and landscapes that have archaeological, paleontological, historical, architectural, religious, aesthetic, or other cultural significance. Physical cultural resources may be located in urban or rural settings and may be above or below ground or under water. Their cultural interest may be at the local, provincial, national, or international level.”

|                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                    |                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
|                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                     | be conducted by a competent expert.                                                                                                                                                                                                                                                                                                                                |                |
| Existing Facilities to be rehabilitated or expanded                                                                                                                  | Conduct environmental audit of existing facilities <sup>4</sup> per ADB SPS                                                                                                                                                                                                                         | For non-compliances, provide corrective action for each area of concern including cost and schedule to be included in the subproject EMP.                                                                                                                                                                                                                          | Being complied |
| Associated Facilities <sup>5</sup>                                                                                                                                   | Analyse environmental impacts and risks to be included in the IEE                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                    | Being complied |
| Asbestos-containing materials (ACM) including, but not limited to, pipes, roofing, ceilings, insulation materials, excess pipes stored in PHED campuses, walls, etc. | Avoid handling or removing any ACM.<br><br>Ensure asbestos concrete (AC) pipes facilities containing asbestos will not be disturbed and left in-situ. Appendix 4 (of EARF) provides asbestos management plan.                                                                                       | If ACM is suspected, asbestos verification by a competent expert is required and an asbestos management plan (AMP) prepared. Appendix 4 (of EARF) provides a sample AMP prepared for a sample subproject (Sardarshahar water and sewerage subproject).<br><br>RUDSICO-EAP shall include AMP in all contracts.<br><br>Contractor should be certified to handle ACM. | Being complied |
|                                                                                                                                                                      | When designing subproject infrastructure that involves excavation in urban areas the relevant authorities must be consulted to ascertain the location of any ACM prior to any subproject activity. Locations of new infrastructure must then be designed to avoid excavating or disturbing any ACM. |                                                                                                                                                                                                                                                                                                                                                                    | Being complied |
| Right-of-way                                                                                                                                                         | Locate water supply pipelines within the right of way (ROW) of other linear structures (roads, irrigation canals) as far as possible, to reduce new land acquisition.                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                    | Being complied |
|                                                                                                                                                                      | Ensure that pipelines ROW do not require land acquisition from individual farmers that is a significant proportion of their                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                    | Being complied |

<sup>4</sup> ADB SPS Appendix 4 para 12 on Existing Facilities

<sup>5</sup> ADB SPS Appendix 1 para 6 defines associated facilities as “not funded as part of the project (funding may be provided separately by the borrower/client or by third parties), and whose viability and existence depend exclusively on the project and whose goods or services are essential for successful operation of the project”

|                                    |                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                             |                |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
|                                    | total land holding (>10%).                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                             |                |
| <b>Water Supply</b>                |                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                             |                |
| Sustainability                     | Utilize water sources at sustainable levels of abstraction only (i.e. without significant reductions in the quantity or quality of the source overall)                                                                                                                                                                                                                            | Water source sustainability or the relevant clearance from PHED should be provided in the subproject's IEE.                                                                                                                                                                                                                 | Being complied |
| Quality (raw water, treated water) | Ensure that water supply to consumers comply with the national drinking water standards at all times and confirm this by regular monitoring at WTPs and in domestic premises.                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                             | Being complied |
|                                    | Avoid using water sources that may be polluted by upstream users                                                                                                                                                                                                                                                                                                                  | Baseline raw water quality to be included in the IEE.                                                                                                                                                                                                                                                                       | Being complied |
|                                    | Avoid water-use conflicts by not abstracting water that is used for other purposes (e.g. irrigation)                                                                                                                                                                                                                                                                              | If there are other users, permits or clearance for the allocation should be provided in the IEE.                                                                                                                                                                                                                            | Being complied |
| Location                           | Locate all new facilities – Water Treatment Plants (WTP), Tube Wells (TW), etc. within 100m from houses, shops or any other premises used by people, thus establishing a buffer to reduce the effects of noise, dust and the visual appearance of the site.                                                                                                                       |                                                                                                                                                                                                                                                                                                                             | Being complied |
|                                    | Locate WTP at sites where there is no risk of flooding or other hazards that might impair functioning of the WTP or present a risk if damage to the WTP or the surrounding area                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                             | Being complied |
| Design                             | Ensure that the water supply system improvements are combined with improvements in sewerage to deal with the increased discharge of domestic wastewater.                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                             | Being complied |
| <b>Sewage System</b>               |                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                             |                |
| Location                           | Locate new Sewage Treatment Plants (STP) as far as should be at least 500m away from any inhabited areas, in locations where no urban expansion is expected in the next 20 years, thus establishing a buffer to reduce effects of odor, visual appearance or other nuisance of the site (this may be reviewed depending on the technology adopted for the treatment of effluent). | In case of non-availability of suitable sites due to land and technical design constraints in already developed areas, where 500 m buffer is not available, following procedures shall be adopted and documented in order to finalize sites for implementation of project: (i) conduct alternate site analysis, justify the | Being complied |

|  |                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                |
|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
|  |                                                                                                                                                                                                                                          | <p>selected site; (ii) develop odor mitigation measures to prevent and control odor/air emissions – design measures, and operational practices that are feasible and practical in local conditions and include in DPR; (iii) develop layout plan with maximum buffer to nearby houses; (iv) provide a peripheral green buffer (at least three rows of trees within the pumping station compound); and (v) public information – consult local community, inform about the need, process adopted to select sites, its suitability, and measures adopted for odor prevention and control</p>                                                                                                                                                                                                                                                                |                |
|  | <p>Locate Sewage Pumping Stations (SPS) and wet wells as far as should be at least 100m away from any inhabited areas and from sites such as hospitals, schools, temples, etc. to minimize nuisance impacts from odor, rodents, etc.</p> | <p>In case of non-availability of suitable sites due to land and technical design constraints in already developed areas, where 100 m buffer is not available, following procedures shall be adopted and documented in order to finalize sites for implementation of project: (i) conduct alternate site analysis, justify the selected site; (ii) develop odor mitigation measures to prevent and control odor/air emissions – design measures, and operational practices that are feasible and practical in local conditions and include in IEE; (iii) develop layout plan with maximum buffer to nearby houses; (iv) provide a peripheral green buffer (at least three rows of trees within the STP compound); and (v) public information – consult local community, inform about the need, process adopted to select sites, its suitability, and</p> | Being complied |

|              |                                                                                                                                                                                                    |                                                  |                |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|----------------|
|              |                                                                                                                                                                                                    | measures adopted for odor prevention and control |                |
|              | Locate STP at sites where there is no risk of flooding or other hazards that might impair function of the STP or present a risk of damage to the STP or the surrounding area                       |                                                  | Being complied |
| Quality      | Ensure that sewage is treated at all times to national wastewater discharge standards and confirm this by regular monitoring of effluent from the STP.                                             |                                                  | Being complied |
| Design       | Ensure that no wastewater is discharged into a water course in which it could be a hazard to downstream users (e.g. a waterway that is used as a source of water for domestic or municipal supply) |                                                  | Being complied |
|              | Include measures to ensure the safe disposal of sewage sludge and if possible, to promote its safe and beneficial use as an agricultural fertilizer <sup>5</sup>                                   |                                                  | Being complied |
| Right-of-way | Locate sewage pipelines within the right of way (ROW) of other linear structures (e.g. roads) wherever feasible, to reduce new land acquisition.                                                   |                                                  | Being complied |
|              | Ensure that routes of sewage mains do not require land acquisition from individual farmers that is a significant proportion of their total land holding (10%)                                      |                                                  | Being complied |

## Appendix 5: Ambient Air Quality, Vehicle, Diesel Generator Emissions Standards

### Ambient Air Quality Standards

| Parameter               | Location <sup>a</sup>                          | India Ambient Air Quality Standard ( $\mu\text{g}/\text{m}^3$ ) <sup>b</sup> | WHO Air Quality Guidelines ( $\mu\text{g}/\text{m}^3$ ) |                                   | Applicable Per ADB SPS <sup>e</sup> ( $\mu\text{g}/\text{m}^3$ ) |
|-------------------------|------------------------------------------------|------------------------------------------------------------------------------|---------------------------------------------------------|-----------------------------------|------------------------------------------------------------------|
|                         |                                                |                                                                              | Global Update <sup>c</sup> 2005                         | Second Edition 2000               |                                                                  |
| PM <sub>10</sub>        | Industrial Residential, Rural and Other Areas  | 60 (Annual)<br>100 (24-hr)                                                   | 20 (Annual)<br>50 (24-hr)                               | -                                 | 20 (Annual)<br>50 (24-hr)                                        |
|                         | Sensitive Area                                 | 60 (Annual)<br>100 (24-hr)                                                   | 20 (Annual)<br>50 (24-hr)                               | -                                 | 20 (Annual)<br>50 (24-hr)                                        |
| PM <sub>2.5</sub>       | Industrial Residential, Rural and Other Areas  | 40 (Annual)<br>60 (24-hr)                                                    | 10 (Annual)<br>25 (24-hr)                               | -                                 | 10 (Annual)<br>25 (24-hr)                                        |
|                         | Sensitive Area                                 | 40 (Annual)<br>60 (24-hr)                                                    | 10 (Annual)<br>25 (24-hr)                               | -                                 | 10 (Annual)<br>25 (24-hr)                                        |
| SO <sub>2</sub>         | Industrial Residential, Rural and Other Areas  | 50 (Annual)<br>80 (24-hr)                                                    | 20 (24-hr)<br>500 (10-min)                              | -                                 | 50 (Annual)<br>20 (24-hr)<br>500 (10-min)                        |
|                         | Sensitive Area                                 | 20 (Annual)<br>80 (24-hr)                                                    | 20 (24-hr)<br>500 (10-min)                              | -                                 | 20 (Annual)<br>20 (24-hr)<br>500 (10-min)                        |
| NO <sub>2</sub>         | Industrial Residential, Rural and Other Areas  | 40 (Annual)<br>80 (24-hr)                                                    | 40 (Annual)<br>200 (1-hr)                               | -                                 | 40 (Annual)<br>80 (24-hr)<br>200 (1-hr)                          |
|                         | Sensitive Area                                 | 30 (Annual)<br>80 (24-hr)                                                    | 40 (Annual)<br>200 (1-hr)                               | -                                 | 30 (Annual)<br>80 (24-hr)<br>200 (1-hr)                          |
| CO                      | Industrial Residential, Rural and Other Areas  | 2,000 (8-hr)<br>4,000 (1-hr)                                                 | -                                                       | 10,000 (8-hr)<br>100,000 (15-min) | 2,000 (8-hr)<br>4,000 (1-hr)<br>100,000 (15-min)                 |
|                         | Sensitive Area                                 | 2,000 (8-hr)<br>4,000 (1-hr)                                                 | -                                                       | 10,000 (8-hr)<br>100,000 (15-min) | 2,000 (8-hr)<br>4,000 (1-hr)<br>100,000 (15-min)                 |
| Ozone (O <sub>3</sub> ) | Industrial Residential, Rural and Other Areas  | 100 (8-hr)<br>180 (1-hr)                                                     | 100 (8-hr)                                              |                                   | 100 (8-hr)<br>180 (1-hr)                                         |
|                         | Sensitive Area                                 | 100 (8-hr)<br>180 (1-hr)                                                     | 100 (8-hr)                                              |                                   | 100 (8-hr)<br>180 (1-hr)                                         |
| Lead (Pb)               | Industrial, Residential, Rural and Other Areas | 0.5 (Annual)<br>1.0 (24-hr)                                                  |                                                         | 0.5 (Annual)                      | 0.5 (Annual)<br>1.0 (24-hr)                                      |
|                         | Sensitive Area                                 | 0.5 (Annual)<br>1.0 (24-hr)                                                  |                                                         | 0.5 (Annual)                      | 0.5 (Annual)<br>1.0 (24-hr)                                      |

| Parameter                                   | Location <sup>a</sup>                         | India Ambient Air Quality Standard | WHO Air Quality Guidelines ( $\mu\text{g}/\text{m}^3$ ) |  | Applicable Per ADB SPS <sup>e</sup> |
|---------------------------------------------|-----------------------------------------------|------------------------------------|---------------------------------------------------------|--|-------------------------------------|
| Ammonia ( $\text{NH}_3$ )                   | Industrial Residential, Rural and Other Areas | 100 (Annual)<br>400 (24-hr)        |                                                         |  | 100 (Annual)<br>400 (24-hr)         |
|                                             | Sensitive Area                                | 100 (Annual)<br>400 (24-hr)        |                                                         |  | 100 (Annual)<br>400 (24-hr)         |
| Benzene ( $\text{C}_6\text{H}_6$ )          | Industrial Residential, Rural and Other Areas | 5 (Annual)                         |                                                         |  | 5 (Annual)                          |
|                                             | Sensitive Area                                | 5 (Annual)                         |                                                         |  | 5 (Annual)                          |
| Benzo(o)pyrene (BaP) particulate phase only | Industrial Residential, Rural and Other Areas | 0.001 (Annual)                     |                                                         |  | 0.001 (Annual)                      |
|                                             | Sensitive Area                                | 0.001 (Annual)                     |                                                         |  | 0.001 (Annual)                      |
| Arsenic (As)                                | Industrial Residential, Rural and Other Areas | 0.006 (Annual)                     |                                                         |  | 0.006 (Annual)                      |
|                                             | Sensitive Area                                | 0.006 (Annual)                     |                                                         |  | 0.006 (Annual)                      |
| Nickel (Ni)                                 | Industrial Residential, Rural and Other Areas | 0.02 (Annual)                      |                                                         |  | 0.02 (Annual)                       |
|                                             | Sensitive Area                                | 0.02 (Annual)                      |                                                         |  | 0.02 (Annual)                       |

<sup>a</sup> Sensitive area refers to such areas notified by the India Central Government.

<sup>b</sup> Notification by Ministry of Environment and Forests, Government of India Environment (Protection) Seventh Amendment Rules, 2009

<sup>c</sup> WHO Air quality guidelines for particulate matter, ozone, nitrogen dioxide and sulfur dioxide. *Global update 2005*. WHO. 2006

<sup>d</sup> Air Quality Guidelines for Europe Second Edition. WHO 2000.

<sup>e</sup> Per ADB SPS, the government shall achieve whichever of the ambient air quality standards is more stringent. If less stringent levels or measures are appropriate in view of specific project circumstances, the executing agency of the government will provide full and detailed justification for any proposed alternatives that are consistent with the requirements presented in ADB SPS

**Table 2: Vehicle Exhaust Emission Norms**

### 1. Passenger Cars

| Norms                    | CO (g/km)  | HC+ NOx (g/km)  |
|--------------------------|------------|-----------------|
| 1991 Norms               | 14.3-27.1  | 2.0(Only HC)    |
| 1996 Norms               | 8.68-12.40 | 3.00-4.36       |
| 1998 Norms               | 4.34-6.20  | 1.50-2.18       |
| India stage 2000 norms   | 2.72       | 0.97            |
| Bharat stage-II          | 2.2        | 0.5             |
| Bharat Stage-III         | 2.3        | 0.35(combined)  |
| Bharat Stage-IV          | 1.0        | 0.18(combined)  |
| Bharat Stage-VI (Petrol) | 1.0        | 0.16 (Combined) |



## 2. Heavy Diesel Vehicles

| Norms                    | CO (g/kmhr) | HC (g/kmhr)   | NOx (g/kmhr) | PM (g/kmhr) |
|--------------------------|-------------|---------------|--------------|-------------|
| 1991 Norms               | 14          | 3.5           | 18           | -           |
| 1996 Norms               | 11.2        | 2.4           | 14.4         | -           |
| India stage 2000 norms   | 4.5         | 1.1           | 8.0          | 0.36        |
| Bharat stage-II          | 4.0         | 1.1           | 7.0          | 0.15        |
| Bharat Stage-III         | 2.1         | 1.6           | 5.0          | 0.10        |
| Bharat Stage-IV          | 1.5         | 0.96          | 3.5          | 0.02        |
| Bharat Stage-VI (Diesel) | 0.5         | 0.17 (HC+NOx) |              | 0.0045      |

**Source:** Central Pollution Control Board

CO = Carbon Monoxide; g/kmhr = grams per kilometer-hour; HC = Hydrocarbons; NOx = oxides of nitrogen; PM = Particulates Matter

## Emission limits for New DG sets up to 800 KW

(As per Environment (Protection) (Third Amendment) Rules, 2013)

TABLE

| Power Category              | Emission Limits<br>(g/kW-hr) |       |       | Smoke Limit (light absorption<br>coefficient, m <sup>-1</sup> ) |
|-----------------------------|------------------------------|-------|-------|-----------------------------------------------------------------|
|                             | NO <sub>x</sub> +HC          | CO    | PM    |                                                                 |
| Upto 19 KW                  | ≤ 7.5                        | ≤ 3.5 | ≤ 0.3 | ≤ 0.7                                                           |
| More than 19 KW upto 75 KW  | ≤ 4.7                        | ≤ 3.5 | ≤ 0.3 | ≤ 0.7                                                           |
| More than 75 KW upto 800 KW | ≤ 4.0                        | ≤ 3.5 | ≤ 0.2 | ≤ 0.7                                                           |

Note:

1. The abbreviations used in the Table shall mean as under: NO<sub>x</sub> – Oxides of Nitrogen; HC – Hydrocarbon; CO – Carbon Monoxide; and PM – Particulate Matter.
2. Smoke shall not exceed above value throughout the operating load points of the test cycle.
3. The testing shall be done as per D2 – 5 mode cycle of ISO: 8178- Part 4.
4. The above mentioned emission limits shall be applicable for Type Approval and Conformity of Production (COP) carried out by authorised agencies.
5. Every manufacturer, importer or, assembler (hereinafter referred to as manufacturer) of the diesel engine (hereinafter referred to as 'engine') for genset application manufactured or imported into India or, diesel genset (hereinafter referred to as 'product'), assembled or imported into India shall obtain Type Approval and comply with COP of their product(s) for the emission limits which shall be valid for the next COP year or, the date of implementation of the revised norms specified above, whichever earlier.  
*Explanation.* - The term 'COP year' means the period from 1st April to 31st March.
6. Stack height (in metres), for genset shall be governed as per Central Pollution Control Board (CPCB) guidelines.

### DIESEL GENERATOR SETS : STACK HEIGHT

The minimum height of stack to be provided with each generator set can be worked out using the following formula :

$$H = h + 0.2 \times \text{KVA}$$

H = Total height of stack in metre

h = Height of the building in metres where the generator set is installed

KVA = Total generator capacity of the set in KVA

Based on the above formula the minimum stack height to be provided with different range of generator sets may be categorised as follows:

| For Generator Sets | Total Height of stack in metre  |
|--------------------|---------------------------------|
| 50 KVA             | Ht. of the building + 1.5 metre |
| 50-100 KVA         | Ht. of the building + 2.0 metre |
| 100-150 KVA        | Ht. of the building + 2.5 metre |
| 150-200 KVA        | Ht. of the building + 3.0 metre |
| 200-250 KVA        | Ht. of the building + 3.5 metre |
| 250-300 KVA        | Ht. of the building + 3.5 metre |

Similarly for higher KVA ratings a stack height can be worked out using the above formula.

Source : Evolved By CPCB  
[Emission Regulations Part IV: COINDS/26/1986-87]

**Appendix 6: Effluent Discharge Standards for STPs order by NGT 30.04.2019**

| Sl. No. | Parameters                                     | Parameters Limit                                                  |
|---------|------------------------------------------------|-------------------------------------------------------------------|
| 1       | pH                                             | 5.5-9.0                                                           |
| 2       | BOD (mg/l)                                     | Not more than 10 mg/l                                             |
| 3       | COD (mg/l)                                     | Not more than 50 mg/l                                             |
| 4       | TSS (mg/l)                                     | Not more than 20 mg/l                                             |
| 5       | P-Total (mg/l)- for discharge into ponds/lakes | Not more than 1.0 mg/l                                            |
| 6       | N-Total (mg/l)                                 | Not more than 10 mg/l                                             |
| 7       | Fecal Coliform (MPN/100ml)                     | Desirable- Less than 100 MPN/100ml<br>Permissible- <230 MPN/100ml |

### Appendix 7: Ambient Air Quality Standards in Respect of Noise

| Receptor/<br>Source | India National<br>Noise Level<br>Standards <sup>a</sup><br>(dBA) |       | WHO Guidelines Value<br>For Noise Levels Measured<br>Out of Doors <sup>b</sup><br>(One Hour LA <sub>q</sub> in dBA) |               | Applicable Per ADB<br>SPS <sup>c</sup><br>(dBA) |            |
|---------------------|------------------------------------------------------------------|-------|---------------------------------------------------------------------------------------------------------------------|---------------|-------------------------------------------------|------------|
|                     | Day                                                              | Night | 07:00 – 22:00                                                                                                       | 22:00 – 07:00 | Day time                                        | Night time |
| Industrial area     | 75                                                               | 70    | 70                                                                                                                  | 70            | 70                                              | 70         |
| Commercial<br>area  | 65                                                               | 55    | 70                                                                                                                  | 70            | 65                                              | 55         |
| Residential Area    | 55                                                               | 45    | 55                                                                                                                  | 45            | 55                                              | 45         |
| Silent Zone         | 50                                                               | 40    | 55                                                                                                                  | 45            | 50                                              | 40         |

<sup>a</sup> Noise Pollution (Regulation and Control) Rules, 2002 as amended up to 2010.

<sup>b</sup> Guidelines for Community Noise. WHO. 1999

<sup>c</sup> Per ADB SPS, the government shall achieve whichever of the ambient air quality standards is more stringent. If less stringent levels or measures are appropriate in view of specific project circumstances, the executing agency of the government will provide full and detailed justification for any proposed alternatives that are consistent with the requirements presented in ADB SPS.

### Noise Limits for Diesel Generator Sets

#### Noise Limit for Generator Sets run with Diesel

#### 1. Noise limit for diesel generator sets (upto 1000 KVA) manufactured on or after the 1<sup>st</sup> January, 2005

The maximum permissible sound pressure level for new diesel generator (DG) sets with rated capacity upto 1000 KVA, manufactured on or after the 1<sup>st</sup> January, 2005 shall be 75 dB(A) at 1 metre from the enclosure surface.

The diesel generator sets should be provided with integral acoustic enclosure at the manufacturing stage itself.

The implementation of noise limit for these diesel generator sets shall be regulated as given in paragraph 3 below.

#### 2. Noise limit for DG sets not covered by paragraph 1.

Noise limits for diesel generator sets not covered by paragraph 1, shall be as follows:-

2.1 Noise from DG set shall be controlled by providing an acoustic enclosure or by treating the room acoustically, at the users end.

2.2 The acoustic enclosure or acoustic treatment of the room shall be designed for minimum 25 dB (A) insertion loss or for meeting the ambient noise standards, whichever is on the higher side ( if the actual ambient noise is on the higher side, it may not be possible to check the performance of the acoustic enclosure/acoustic treatment. Under such circumstances the performance may be checked for noise reduction upto actual ambient noise level, preferably, in the night time). The measurement for Insertion Loss may be done at different points at 0.5 m from the acoustic enclosure/ room, then averaged.

2.3 The DG set shall be provided with proper exhaust muffler with insertion loss of minimum 25 dB (A).

2.4 These limits shall be regulated by the State Pollution Control Boards and the State Pollution Control Committees.

2.5 Guidelines for the manufacturers/ users of Diesel Generator sets shall be as under:-

01. The manufacturer shall offer to the user a standard acoustic enclosure of 25 dB (A) insertion loss and also a suitable exhaust muffler with insertion loss of 25 dB(A).
02. The user shall make efforts to bring down the noise levels due to the DG set, outside his premises, within the ambient noise requirements by proper citing and control measures.
03. Installation of DG set must be strictly in compliance with the recommendations of the DG set manufacturer.
04. A proper routine and preventive maintenance procedure for the DG set should be set and followed in consultation with the DG set manufacturer which would help prevent noise levels of the DG set from deteriorating with use.

### **3.0 Limits of Noise for DG Sets (upto 1000 KVA) Manufactured on or after the 1<sup>st</sup> January, 2005**

#### **3.1 Applicability**

01. These rules apply to DG sets upto 1000 KVA rated output, manufactured or imported in India, on or after 1<sup>st</sup> January, 2005.
02. These rules shall not apply to –
  - a) DG sets manufactured or imported for the purpose of exports outside India; and
  - b) DG sets intended for the purpose of sample and not for sale in India.

#### **3.2 Requirement of Certification**

Every manufacturer or assembler or importer (hereinafter referred to as the "manufacturer") of DG set (hereinafter referred to as "product") to which these regulations apply must have valid certificates of Type Approval and also valid certificates of Conformity of Production for each year, for all the product models being manufactured or assembled or imported from 1<sup>st</sup> January, 2005 with the noise limit specified in paragraph 1.

#### **3.3 Sale, import or use of DG sets not complying with the rules prohibited**

No person shall sell, import or use of a product model, which is not having a valid Type Approval Certificate and Conformity of Production certificate.

## Appendix 8: Extract from Construction and Demolition Management Rules, 2016

[Published In the Gazette of India, Part-II, Section-3, Sub-section (ii)]  
Ministry of Environment, Forest and Climate Change

### NOTIFICATION

New Delhi, the 29<sup>th</sup> March, 2016

**G.S.R. 317(E).**—Whereas the Municipal Solid Wastes (Management and Handling) Rules, 2000 published vide notification number S.O. 908(E), dated the 25<sup>th</sup> September, 2000 by the Government of India in the erstwhile Ministry of Environment and Forests, provided a regulatory frame work for management of Municipal Solid Waste generated in the urban area of the country;

And whereas, to make these rules more effective and to improve the collection, segregation, recycling, treatment and disposal of solid waste in an environmentally sound manner, the Central Government reviewed the existing rules and it was considered necessary to revise the existing rules with a emphasis on the roles and accountability of waste generators and various stakeholders, give thrust to segregation, recovery, reuse, recycle at source, address in detail the management of construction and demolition waste.

And whereas, the draft rules, namely, the Solid Waste Management Rules, 2015 with a separate chapter on construction and demolition waste were published by the Central Government in the Ministry of Environment, Forest and Climate Change vide G.S.R. 451 (E), dated the 3<sup>rd</sup> June, 2015 inviting objections or suggestions from the public within sixty days from the date of publication of the said notification;

And Whereas, the objections or suggestions received within the stipulated period were duly considered by the Central Government;

Now, therefore, in exercise of the powers conferred by sections 6, 25 of the Environment (Protection) Act, 1986 (29 of 1986), and in supersession of the Municipal Solid Wastes (Management and Handling) Rules, 2000, except as respect things done or omitted to be done before such supersession, the Central Government hereby notifies the following rules for Management of Construction and Demolition Waste –

**1. Short title and commencement.**—(1) These rules shall be called the Construction and Demolition Waste Management Rules, 2016.

(2) They shall come into force on the date of their publication in the Official Gazette.

**2. Application.**—The rules shall apply to every waste resulting from construction, re-modeling, repair and demolition of any civil structure of individual or organisation or authority who generates construction and demolition waste such as building materials, debris, rubble.

**3. Definitions** —(1) In these rules, unless the context otherwise requires,–

(a) "ACT" means the Environment ( Protection) Act, 1986 (29 of 1986);

(b) "**construction**" means the process of erecting of building or built facility or other structure, or

building of infrastructure including alteration in these entities,;

- (c) **"construction and demolition waste"** means the waste comprising of building materials, debris and rubble resulting from construction, re-modeling, repair and demolition of any civil structure;
- (d) **"de-construction"** means a planned selective demolition in which salvage, re-use and recycling of the demolished structure is maximized;
- (e) **"demolition"** means breaking down or tearing down buildings and other structures either manually or using mechanical force (by various equipment) or by implosion using explosives.
- (f) **"form"** means a **Form annexed to these rules;**
- (g) **"local authority"** means an urban local authority with different nomenclature such as municipal corporation, municipality, nagarpalika, nagarnigam, nagarpanchayat, municipal council including notified area committee and not limited to or any other local authority constituted under the relevant statutes such as gram panchayat, where the management of construction and demolition waste is entrusted to such agency;
- (h) **" schedule"** means a schedule annexed to these rules;
- (i) **"service provider"** means authorities who provide services like water, sewerage, electricity, telephone, roads, drainage etc. often generate construction and demolition waste during their activities, which includes excavation, demolition and civil work;
- (j) **"waste generator"** means **any person or association of persons** or institution, residential and commercial establishments including Indian Railways, Airport, Port and Harbour and Defence establishments who undertakes construction of or demolition of any civil structure which generate construction and demolition waste.

(2) Words and expressions used but not defined herein shall have the same meaning defined in the ACT.

**(4) Duties of the waste generator -**

- (1) Every waste generator shall prima-facie be responsible for collection, segregation of concrete, soil and others and storage of construction and demolition waste generated, as directed or notified by the concerned local authority in consonance with these rules.
- (2) The generator shall ensure that other waste (such as solid waste) does not get mixed with this waste and is stored and disposed separately.
- (3) Waste generators who generate more than 20 tons or more in one day or 300 tons per project in a month shall segregate the waste into four streams such as concrete, soil, steel, wood and plastics, bricks and mortar and shall submit waste management plan and get appropriate approvals from the local authority before starting construction or demolition or remodeling work and keep the concerned

authorities informed regarding the relevant activities from the planning stage to the implementation stage and this should be on project to project basis.

(4) Every waste generator shall keep the construction and demolition waste within the premise or get the waste deposited at collection centre so made by the local body or handover it to the authorised processing facilities of construction and demolition waste; and ensure that there is no littering or deposition of construction and demolition waste so as to prevent obstruction to the traffic or the public or drains.

(5) Every waste generator shall pay relevant charges for collection, transportation, processing and disposal as notified by the concerned authorities; Waste generators who generate more than 20 tons or more in one day or 300 tons per project in a month shall have to pay for the processing and disposal of construction and demolition waste generated by them, apart from the payment for storage, collection and transportation. The rate shall be fixed by the concerned local authority or any other authority designated by the State Government.

**(5) Duties of service provider and their contractors -**

(1) The service providers shall prepare within six months from the date of notification of these rules, a comprehensive waste management plan covering segregation, storage, collection, reuse, recycling, transportation and disposal of construction and demolition waste generated within their jurisdiction.

(2) The service providers shall remove all construction and demolition waste and clean the area every day, if possible, or depending upon the duration of the work, the quantity and type of waste generated, appropriate storage and collection, a reasonable timeframe shall be worked out in consultation with the concerned local authority.

(3) In case of the service providers have no logistics support to carry out the work specified in sub-rules (1) and (2) , they shall tie up with the authorised agencies for removal of construction and demolition waste and pay the relevant charges as notified by the local authority.

**(6) Duties of local authority-The local authority shall,-**

(1) issue detailed directions with regard to proper management of construction and demolition waste within its jurisdiction in accordance with the provisions of these rules and the local authority shall seek detailed plan or undertaking as applicable, from generator of construction and demolition waste;

(2) chalk out stages, methodology and equipment, material involved in the overall activity and final clean up after completion of the construction and demolition ;

(3c) seek assistance from concerned authorities for safe disposal of construction and demolition waste contaminated with industrial hazardous or toxic material or nuclear waste if any;

(4) shall make arrangements and place appropriate containers for collection of waste and shall remove at regular intervals or when they are filled, either through own resources or by appointing private operators;



- (5) shall get the collected waste transported to appropriate sites for processing and disposal either through own resources or by appointing private operators;
- (6) shall give appropriate incentives to generator for salvaging, processing and or recycling preferably in-situ;
- (7) shall examine and sanction the waste management plan of the generators within a period of one month or from the date of approval of building plan, whichever is earlier from the date of its submission;
- (8) shall keep track of the generation of construction and demolition waste within its jurisdiction and establish a data base and update once in a year;
- (9) shall devise appropriate measures in consultation with expert institutions for management of construction and demolition waste generated including processing facility and for using the recycled products in the best possible manner;
- (10) shall create a sustained system of information, education and communication for construction and demolition waste through collaboration with expert institutions and civil societies and also disseminate through their own website;
- (11) shall make provision for giving incentives for use of material made out of construction and demolition waste in the construction activity including in non-structural concrete, paving blocks, lower layers of road pavements, colony and rural roads.

**(7) Criteria for storage, processing or recycling facilities for construction and demolition waste and application of construction and demolition waste and its products-**

- (1) The site for storage and processing or recycling facilities for construction and demolition waste shall be selected as per the criteria given in **Schedule I**;
- (2) The operator of the facility as specified in sub- rules (1) shall apply in **Form I** for authorization from State Pollution Control Board or Pollution Control Committee.
- (3) The operator of the facility shall submit the annual report to the State Pollution Control Board in **Form II**.
- (3) Application of materials made from construction and demolition waste in operation of sanitary landfill shall be as per the criteria given in **Schedule II**.

**(8) Duties of State Pollution Control Board or Pollution Control Committee-**

- (1) State Pollution Control Board or Pollution Control Committee shall monitor the implementation of these rules by the concerned local bodies and the competent authorities and the annual report shall be sent to the Central Pollution Control Board and the State Government or Union Territory or any other State level nodal agency identified by the State Government or Union Territory administration for generating State level comprehensive data. Such reports shall also contain the comments and suggestions of the State Pollution Control Board or Pollution Control Committee with respect to any comments or changes required;

(2) State Pollution Control Board or Pollution Control Committee shall grant authorization to construction and demolition waste processing facility in **Form-III** as specified under these rules after examining the application received in **Form I**;

(3) State Pollution Control Board or Pollution Control Committee shall prepare annual report in **Form IV** with special emphasis on the implementation status of compliance of these rules and forward report to Central Pollution Control Board before the 31<sup>st</sup> July for each financial year.

**(9) Duties of State Government or Union Territory Administration-**

(1) The Secretary in-charge of development in the State Government or Union territory administration shall prepare their policy document with respect to management of construction and demolition of waste in accordance with the provisions of these rules within one year from date of final notification of these rules.

(2) The concerned department in the State Government dealing with land shall be responsible for providing suitable sites for setting up of the storage, processing and recycling facilities for construction and demolition waste.

(3) The Town and Country planning Department shall incorporate the site in the approved land use plan so that there is no disturbance to the processing facility on a long term basis.

(4) Procurement of materials made from construction and demolition waste shall be made mandatory to a certain percentage (say 10-20%) in municipal and Government contracts subject to strict quality control.

**(10) Duties of the Central Pollution Control Board - (1) The Central Pollution Control Board shall,-**

(a) prepare operational guidelines related to environmental management of construction and demolition waste management;

(b) analyze and collate the data received from the State Pollution Control Boards or Pollution Control Committee to review these rules from time to time;

(c) coordinate with all the State Pollution Control Board and Pollution Control Committees for any matter related to development of environmental standards;

(d) forward annual compliance report to Central Government before the 30<sup>th</sup> August for each financial year based on reports given by State Pollution Control Boards of Pollution Control Committees.

**(11) Duties of Bureau of Indian Standards and Indian Roads Congress -**The Bureau of Indian Standards and Indian Roads Congress shall be responsible for preparation of code of practices and standards for use of recycled materials and products of construction and demolition waste in respect of construction activities and the role of Indian Road Congress shall be specific to the standards and practices pertaining to construction of roads.

**Schedule III**  
**Timeframe for Planning and Implementation**  
**[See Rule 13]**

| Sl. No. | Compliance Criteria                                            | Cities with population of 01 million and above | Cities with population of 0.5-01 million | Cities with population of less than 0.5 million |
|---------|----------------------------------------------------------------|------------------------------------------------|------------------------------------------|-------------------------------------------------|
| 1       | Formulation of policy by State Government                      | 12 months                                      | 12 months                                | 12 months                                       |
| 2       | Identification of sites for collection and processing facility | 18 months                                      | 18 months                                | 18 months                                       |
| 3       | Commissioning and implementation of the facility               | 18 months                                      | 24 months                                | 36 months                                       |
| 4       | Monitoring by SPCBs                                            | 3 times a year – once in 4 months              | 2 times a year – once in 6 months        | 2 times a year – once in 6 months               |

*\*The time Schedule is effective from the date of notification of these rules.*

**FORM – I**  
**See [Rule 7 (2)]**  
**Application for obtaining authorisation**

To,  
The Member Secretary

\_\_\_\_\_ Name of the local authority or Name of the agency :  
appointed by the municipal authority

|                                                                                                                                                                                                                                                                                                 |                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Correspondence address<br>Telephone No.<br>Fax No.                                                                                                                                                                                                                                              |                                                                                     |
| Nodal Officer and designation (Officer authorized by the competent authority or agency responsible for operation of processing or recycling or disposal facility)                                                                                                                               |                                                                                     |
| Authorisation applied for (Please tick mark)                                                                                                                                                                                                                                                    | Setting up of processing or recycling facility of construction and demolition waste |
| Detailed proposal of construction and demolition waste processing or recycling facility to include the following<br>Location of site approved and allotted by the Competent Authority.<br>Average quantity (in tons per day) and composition of construction and demolition waste to be handled |                                                                                     |

### **Appendix 9: Salient Features of Major Laws Applicable to Establishments Engaged in Construction of Civil Works**

- (i) Workmen Compensation Act, 1923 - The Act provides for compensation in case of injury by accident arising out of and during the course of employment.
- (ii) Payment of Gratuity Act, 1972 - Gratuity is payable to an employee under the Act on satisfaction of certain conditions on separation if an employee has completed 5 years' service or more or on death at the rate of 15 days wages for every completed year of service. The Act is applicable to all establishments employing 10 or more employees.
- (iii) Employees' PF and Miscellaneous Provisions Act, 1952 - The Act provides for monthly contributions by the employer plus workers @10 % or 8.33 %. The benefits payable under the Act are: (a) Pension or family pension on retirement or death as the case may be; (b) deposit linked insurance on the death in harness of the worker; (c) payment of PF accumulation on retirement/death etc.
- (iv) Maternity Benefit Act, 1951 - The Act provides for leave and some other benefits to women employees in case of confinement or miscarriage etc.
- (v) Contract Labour (Regulation and Abolition) Act, 1970 - The Act provides for certain welfare measures to be provided by the Contractor to contract labor and in case the Contractor fails to provide, the same are required to be provided by the Principal Employer by Law. The principal employer is required to take Certificate of Registration and the Contractor is required to take a License from the designated Officer. The Act is applicable to the establishments or Contractor of principal employer if they employ 20 or more contract labor.
- (vi) Minimum Wages Act, 1948 - The employer is supposed to pay not less than the Minimum Wages fixed by appropriate Government as per provisions of the Act if the employment is a scheduled employment. Construction of Buildings, Roads and Runways are scheduled employment.
- (vii) Payment of Wages Act, 1936 - It lays down as to by what date the wages are to be paid, when it will be paid and what deductions can be made from the wages of the workers.
- (viii) Equal Remuneration Act, 1979 - The Act provides for payment of equal wages for work of equal nature to Male and Female workers and not for making discrimination against Female employees in the matters of transfers, training and promotions etc.
- (ix) Payment of Bonus Act, 1965 - The Act is applicable to all establishments employing 20 or more workmen. The Act provides for payments of annual bonus subject to a minimum of 8.33 % of wages and maximum of 20 % of wages to employees drawing Rs. 3,500/- per month or less. The bonus to be paid to employees getting Rs. 2,500/- per month or above up to Rs.3,500/- per month shall be worked out by taking wages as Rs.2,500/- per month only. The Act does not apply to certain establishments. The newly set up establishments are exempted for

five years in certain circumstances. Some of the State Governments have reduced the employment size from 20 to 10 for the purpose of applicability of the Act.

(x) Industrial Disputes Act, 1947 - The Act lays down the machinery and procedure for resolution of industrial disputes, in what situations a strike or lock-out becomes illegal and what are the requirements for laying off or retrenching the employees or closing down the establishment.

(xi) Industrial Employment (Standing Orders) Act, 1946-It is applicable to all establishments employing 100 or more workmen (employment size reduced by some of the States and Central Government to 50). The Act provides for laying down rules governing the conditions of employment by the employer on matters provided in the Act and get the same certified by the designated Authority.

(xii) Trade Unions Act, 1926 - The Act lays down the procedure for registration of trade unions of workmen and employees. The trade unions registered under the Act have been given certain immunities from civil and criminal liabilities.

(xiii) Child Labor (Prohibition and Regulation) Act, 1986 - The Act prohibits employment of children below 14 years of age in certain occupations and processes and provides for regulation of employment of children in all other occupations and processes. Employment of child labor is prohibited in Building and Construction Industry.

(xiv) Inter-State Migrant Workmen's (Regulation of Employment and Conditions of Service) Act, 1979 - The Act is applicable to an establishment which employs 5 or more inter-state migrant workmen through an intermediary (who has recruited workmen in one state for employment in the establishment situated in another state). The inter-state migrant workmen, in an establishment to which this Act becomes applicable, are required to be provided certain facilities such as housing, medical aid, traveling expenses from home up to the establishment and back, etc.

(xv) Construction and Demolition Waste Management Rules 2016- This Rule stipulate that-

- Every waste generator shall segregate construction and demolition waste and deposit at collection centre or handover it to the authorized processing facilities
- Shall ensure that there is no littering or deposition so as to prevent obstruction to the traffic or the public or drains.
- Large generators (who generate more than 20 tons or more in one day or 300 tons per project in a month) shall submit waste management plan and get appropriate approvals from the local authority before starting construction or demolition or remodeling work,
- Large generators shall have environment management plan to address the likely environmental issues from construction, demolition, storage, transportation process and disposal / reuse of C & D Waste.
- Large generators shall segregate the waste into four streams such as concrete, soil, steel, wood and plastics, bricks and mortar,
- Large generators shall pay relevant charges for collection, transportation, processing and disposal as notified by the concerned authorities;

(xvi) Solid Waste Management Rules 2016- As per this Rule responsibility of Solid Waste

Generator is as below.

- segregate and store the waste generated in three separate streams namely bio-degradable, non biodegradable and domestic hazardous wastes in suitable bins and handover segregated wastes to authorized waste pickers or waste collectors as per the direction or notification by the local authorities from time to time;
  - store separately construction and demolition waste, as and when generated, in his own premises and shall dispose off as per the Construction and Demolition Waste Management Rules, 2016; and
  - No waste generator shall throw, burn or bury the solid waste generated by him, on streets, open public spaces outside his premises or in the drain or water bodies.
- (xvii) The Building and Other Construction Workers (Regulation of Employment and Conditions of Service) Act, 1996 and the Cess Act of 1996 - All the establishments who carry on any building or other construction work and employ 10 or more workers are covered under this Act. All such establishments are required to pay Cess at rate not exceeding 2% of the cost of construction as may be notified by the Government. The employer of the establishment is required to provide safety measures at the building or construction work and other welfare measures, such as canteens, first-aid facilities, ambulance, housing accommodation for workers near the workplace etc. The employer to whom the Act applies has to obtain a registration certificate from the Registering Officer appointed by the Government. Salient features of this Act are given below.

#### **Employer shall-**

- Provide and maintain, at suitable point, sufficient quantity of wholesome drinking water, such point shall be at least 6 meters away from any washing areas, urinals or toilets
- Provide sufficient urinals and latrines at convenient place, easily accessible by workers
- Provide free of charge, temporary living accommodations near to work sites with separate cooking place, bathing and lavatory facilities and restore the site as pre conditions after completing the construction works
- Provide crèche with proper accommodation, ventilation, lighting, cleanliness and sanitation if more than fifty female workers are engaged
- Provide first aid facilities in all construction sites

#### **For safety of workers employer shall provide-**

- Safe access to site and work place
- Safety in demolition works
- Safety in use of explosives
- Safety in operation of transporting equipments and appoint competent person to drive or operate such vehicles and equipments
- Safety in lifting appliance, hoist and lifting gears
- Adequate and suitable lighting to every work place and approach
- Prevention of inhalation of dust, smoke, fumes, gases during construction works and provide adequate ventilation in work place and confined space
- Safety in material handling and stacking/un stacking
- Safeguarding the machinery with fly-wheel of moving parts
- Safe handling and use of plants operated by compressed air

- Fire safety
- Limit of weight to be lifted by workers individually
- Safety in electric wires, apparatus, tools and equipments
- Provide safety net, safety sheet, safety belts while working at height (more than 1.6 mtrs as per OSHA)
- Providing scaffolding, ladders and stairs, lifting appliances, chains and accessories where required
- Safety in pile works, concrete works, hot asphalt, tar, insulation, demolition works, excavation, underground construction and handling materials
- Provide and maintain medical facilities for workers
- Any other matters for the safety and health of workers

## Appendix 10: Groundwater Quality Test Reports

**Office of the Junior Chemist P. H. E. D. Laboratory  
CHURU (Raj.)**

**Report of the Chemical-Analysis of Water**

No. Lab/Tech/..... 408/2111117 Date.....  
 To, Distt.....  
 The राजस्थान अग्निमन्त्रालय Tehsil.....  
जयपुर अग्निमन्त्रालय  
नगर उपरवर्द्ध सरदारशहर  
 Reference : Your Letter No..... Date..... Name of Sample taker.....  
 Date of Receipt..... Date of Analysis.....

| Code No.             |                                              | Max. Permissible Limit | Note : All results except PH are in mg/L |          |          |          |
|----------------------|----------------------------------------------|------------------------|------------------------------------------|----------|----------|----------|
| Name of Source       |                                              |                        | TW No 11                                 | TW No 19 | TW No 23 | TW No 34 |
| Name of Panchayat    |                                              |                        |                                          |          |          |          |
| Name of Village/Town |                                              |                        | सरदार                                    | सरदार    | सरदार    | सरदार    |
| Name of Collection   |                                              |                        | 29                                       | 9        | 20       | 7        |
| Lab. Sample No.      |                                              |                        | 377                                      | 378      | 379      | 380      |
| 1.                   | PH                                           | 6.5-9.2                | 7.9                                      | 7.9      | 7.5      | 8.0      |
| 2.                   | Turbidity (NTU)                              | 10                     | clear                                    |          |          |          |
| 3.                   | Colour                                       | -                      | -                                        |          |          |          |
| 4.                   | Odour                                        | Vnobj                  | NIL                                      |          |          |          |
| 5.                   | Total Alkalinity (as CaCO <sub>3</sub> )     | -                      | 800                                      | 700      | 100      | 800      |
| 6.                   | Total Hardness (as CaCO <sub>3</sub> )       | 600                    | 100                                      | 160      | 140      | 550      |
| 7.                   | Calcium Hardness (as CaCO <sub>3</sub> )     | -                      | 60                                       | 100      | 110      | 120      |
| 8.                   | Magnesium Hardness (as CaCO <sub>3</sub> )   | -                      | 40                                       | 60       | 30       | 430      |
| 9.                   | Chloride (as CL)                             | 1000                   | 350                                      | 350      | 70       | 950      |
| 10.                  | Sulphate (as SO <sub>4</sub> <sup>2-</sup> ) | 400                    | -                                        | N.       | D        | -        |
| 11.                  | Nitrites (as No <sub>2</sub> -)              | -                      | -                                        | N.       | D        | -        |
| 12.                  | Nitrites (as No <sub>3</sub> -)              | 100                    | 30                                       | 30       | 10       | 45       |
| 13.                  | Total Dissolved Solids                       | 3000                   | 1560                                     | 1530     | 290      | 3120     |
| 14.                  | Residual Chlorine                            | -                      | -                                        | -        | -        | -        |
| 15.                  | Fluoride (as F-)                             | 3.00                   | 5.0                                      | 6.9      | 0.3      | 3.3      |
| 16.                  | Iron                                         | -                      | -                                        | -        | -        | -        |

No. Lab/Tech/.....  
 Copy to :  
 1. The Chief Chemist P.H.E.D., Raj Jaipur  
 2. The Senior Chemist, P.H.E.D. Lab.....  
 3. The.....

JUNIOR CHEMIST  
 P.H.E.D Laboratory, CHURU  
 Dated.....



**Office of the Junior Chemist P. H. E. D. Laboratory  
CHURU (Raj.)**

**Report of the Chemical-Analysis of Water**

No. Lab/Tech/.....2017-18/220 Date.....27.7.17  
 To,.....पूरु Distt.....  
 The.....सरदारशहर Tehsil.....  
महाराष्ट्र सरकार  
महाराष्ट्र सरकार  
 Reference : Your Letter No. ....24 Date.....24.7.2017 Name of Sample taker.....श्री. रमेश चंद्र  
 Date of Receipt.....25.7.2017 Date of Analysis.....27.7.2017

|                                                  |                        |                                          |            |    |    |
|--------------------------------------------------|------------------------|------------------------------------------|------------|----|----|
| Code No.                                         |                        |                                          |            |    |    |
| Name of Source                                   |                        | TW                                       | TW         |    |    |
| Name of Panchayat                                |                        | महाराष्ट्र                               | महाराष्ट्र |    |    |
| Name of Village/Town                             |                        | महाराष्ट्र                               | महाराष्ट्र |    |    |
| Name of Collection                               |                        | 24                                       | 07         | 20 | 17 |
| Lab. Sample No.                                  |                        | 255                                      | 256        |    |    |
|                                                  | Max. Permissible Limit | Note : All results except PH are in mg/L |            |    |    |
| 1. PH                                            | 8.5-9.2                | 7.5                                      | 7.8        |    |    |
| 2. Turbidity (NTU)                               | 10                     | clear                                    |            |    |    |
| 3. Colour                                        | -                      | -                                        |            |    |    |
| 4. Odour                                         | Vnobj                  | -N                                       | 2L         |    |    |
| 5. Total Alkalinity (as CaCO <sub>3</sub> )      | -                      | 70                                       | 830        |    |    |
| 6. Total Hardness (as CaCO <sub>3</sub> )        | 600                    | 100                                      | 120        |    |    |
| 7. Calcium Hardness (as CaCO <sub>3</sub> )      | -                      | 60                                       | 60         |    |    |
| 8. Magnesium Hardness (as CaCO <sub>3</sub> )    | -                      | 40                                       | 60         |    |    |
| 9. Chloride (as CL)                              | 1000                   | 300                                      | 300        |    |    |
| 10. Sulphate (as SO <sub>4</sub> <sup>2-</sup> ) | 400                    | -N                                       | D-         |    |    |
| 11. Nitrites (as NO <sub>2</sub> <sup>-</sup> )  | -                      | -N                                       | D-         |    |    |
| 12. Nitrites (as NO <sub>3</sub> <sup>-</sup> )  | 100                    | 20                                       | 30         |    |    |
| 13. Total Dissolved Solids                       | 3000                   | 1040                                     | 1520       |    |    |
| 14. Residual Chlorine                            | -                      | -                                        |            |    |    |
| 15. Fluoride (as F-)                             | 3.00                   | 3.7                                      | 9.2        |    |    |
| 16. Iron                                         | -                      |                                          |            |    |    |

No. Lab/Tech/.....

Copy to :

1. The Chief Chemist P.H.E.D., Raj Jaipur
2. The Senior Chemist, P.H.E.D. Lab.....
3. The.....

.....  
 JUNIOR CHEMIST  
 P.H.E.D Laboratory, CHURU  
 Dated.....

**Office of the Junior Chemist P. H. E. D. Laboratory  
CHURU (Raj.)**

**Report of the Chemical-Analysis of Water**

No. Lab/Tech/.....2017-18/220..... Date.....27.7.17.....  
 To,.....सहायक अभियंता..... Distt.....धुल.....  
 The.....जयपुर. अभियंता विभाग..... Tehsil.....सरदारशहर.....  
नगर 342905 सरदारशहर.....  
 Reference : Your Letter No. ....790..... Date.....24.7.2017..... Name of Sample taker.....श्री. रमेश चरण.....  
 Date of Receipt.....25.7.2017..... Date of Analysis.....27.7.2017.....

|                                                  |                        |                                          |          |    |    |
|--------------------------------------------------|------------------------|------------------------------------------|----------|----|----|
| Code No.                                         |                        |                                          |          |    |    |
| Name of Source                                   |                        | TW                                       | TW       |    |    |
| Name of Panchayat                                |                        | बनार                                     | मानाजी   |    |    |
| Name of Village/Town                             |                        | सरदारशहर                                 | सरदारशहर |    |    |
| Name of Collection                               |                        | 24                                       | 07       | 20 | 17 |
| Lab. Sample No.                                  |                        | 255                                      | 256      |    |    |
|                                                  | Max. Permissible Limit | Note : All results except PH are in mg/L |          |    |    |
| 1. PH                                            | 8.5-9.2                | 7.5                                      | 7.8      |    |    |
| 2. Turbidity (NTU)                               | 10                     | clear                                    |          |    |    |
| 3. Colour                                        | -                      | -                                        | -        |    |    |
| 4. Odour                                         | Vnobj                  | -N                                       | 2L       |    |    |
| 5. Total Alkalinity (as CaCO <sub>3</sub> )      | -                      | 70                                       | 830      |    |    |
| 6. Total Hardness (as CaCO <sub>3</sub> )        | 600                    | 100                                      | 120      |    |    |
| 7. Calcium Hardness (as CaCO <sub>3</sub> )      | -                      | 60                                       | 60       |    |    |
| 8. Magnesium Hardness (as CaCO <sub>3</sub> )    | -                      | 40                                       | 60       |    |    |
| 9. Chloride (as CL)                              | 1000                   | 300                                      | 300      |    |    |
| 10. Sulphate (as SO <sub>4</sub> <sup>2-</sup> ) | 400                    | -N                                       | D-       |    |    |
| 11. Nitrites (as NO <sub>2</sub> <sup>-</sup> )  | -                      | -N                                       | D-       |    |    |
| 12. Nitrites (as NO <sub>3</sub> <sup>-</sup> )  | 100                    | 20                                       | 30       |    |    |
| 13. Total Dissolved Solids                       | 3000                   | 1040                                     | 1520     |    |    |
| 14. Residual Chlorine                            | -                      | -                                        | -        |    |    |
| 15. Fluoride (as F-)                             | 3.00                   | 3.7                                      | 9.2      |    |    |
| 16. Iron                                         | -                      |                                          |          |    |    |

No. Lab/Tech/.....

Copy to :

1. The Chief Chemist P.H.E.D., Raj Jaipur
2. The Senior Chemist, P.H.E.D. Lab.....
3. The.....

.....  
**JUNIOR CHEMIST**  
 P.H.E.D Laboratory, CHURU  
 Dated.....



**Office of the Junior Chemist P. H. E. D. Laboratory  
CHURU (Raj.)**

**Report of the Chemical-Analysis of Water**

No. Lab/Tech/2017-18/220

Date 27.7.17

To,

Distt.....

The सहायक अभियंता

Tehsil सरदारशेर

ज.स.प. (उपखण्ड सरदारशेर)

Reference : Your Letter No. 790 Date 24.7.2017

Name of Sample taker श. र. श. र. श. र. श.

Date of Receipt 25.7.2017 Date of Analysis 27.7.2017

|                      |                                              |                        |                                          |          |          |      |
|----------------------|----------------------------------------------|------------------------|------------------------------------------|----------|----------|------|
| Code No.             |                                              |                        |                                          |          |          |      |
| Name of Source       |                                              | T/W 10                 | 8/W                                      | T/W 40   | T/W 3    |      |
| Name of Panchayat    |                                              | मोहरा                  |                                          | मोहरा    |          |      |
| Name of Village/Town |                                              | सरदारशेर               | सरदारशेर                                 | सरदारशेर | सरदारशेर |      |
| Name of Collection   |                                              | 24                     | 07                                       | 20       | 17       |      |
| Lab. Sample No.      |                                              | 247                    | 248                                      | 249      | 250      |      |
|                      |                                              | Max. Permissible Limit | Note : All results except PH are in mg/L |          |          |      |
| 1.                   | PH                                           | 6.5-9.2                | 7.8                                      | 7.8      | 7.9      | 7.6  |
| 2.                   | Turbidity (NTU)                              | 10                     | —                                        | clear    | —        | —    |
| 3.                   | Colour                                       | -                      | —                                        | —        | —        | —    |
| 4.                   | Odour                                        | Vnobj                  | —                                        | N        | P        | L    |
| 5.                   | Total Alkalinity (as CaCO <sub>3</sub> )     | -                      | 520                                      | 830      | 1000     | 350  |
| 6.                   | Total Hardness (as CaCO <sub>3</sub> )       | 600                    | 270                                      | 120      | 100      | 380  |
| 7.                   | Calcium Hardness (as CaCO <sub>3</sub> )     | -                      | 160                                      | 70       | 50       | 210  |
| 8.                   | Magnesium Hardness (as CaCO <sub>3</sub> )   | -                      | 110                                      | 50       | 50       | 170  |
| 9.                   | Chloride (as CL)                             | 1000                   | 340                                      | 240      | 380      | 180  |
| 10.                  | Sulphate (as SO <sub>4</sub> <sup>2-</sup> ) | 400                    | —                                        | N.       | D        | —    |
| 11.                  | Nitrites (as NO <sub>2</sub> -)              | -                      | —                                        | N.       | P        | —    |
| 12.                  | Nitrites (as NO <sub>3</sub> -)              | 100                    | 30                                       | 20       | 35       | 20   |
| 13.                  | Total Dissolved Solids                       | 3000                   | 1560                                     | 1400     | 1900     | 1170 |
| 14.                  | Residual Chlorine                            | -                      | —                                        | —        | —        | —    |
| 15.                  | Fluoride (as F-)                             | 3.00                   | 3.0                                      | 4.0      | 29.7     | 0.9  |
| 16.                  | Iron                                         | -                      | —                                        | —        | —        | —    |

No. Lab/Tech/.....

Copy to :

1. The Chief Chemist P.H.E.D., Raj Jaipur
2. The Senior Chemist, P.H.E.D. Lab.....
3. The.....

सहायक अभियंता  
JUNIOR CHEMIST  
P.H.E.D Laboratory, CHURU  
Dated.....

JUNIOR CHEMIST  
P.H.E.D Laboratory, CHURU



Office of the Junior Chemist  
Public Health Engineering Department, Rajasthan  
District Laboratory, Churu

Report of the Chemical Examination of Water

Date: 10/05/2018

Reference :-NA - Dated : 16/03/2018

/ 59

To:  
Assistant Engineer,  
Sub Division, Sardarshahar,  
Sardarshahar.

District : CHURU  
Town : Sardarshahar (M)

| Sample No. | Gram Panchayat | Village/ Town    | Habitat | Source Name | Location                 | Collection Date | Date of Examination | pH  | Alkalinity | Total Hardness | Calcium | Magnesium | Chloride | Nitrate | Fluoride | T.D.S. |
|------------|----------------|------------------|---------|-------------|--------------------------|-----------------|---------------------|-----|------------|----------------|---------|-----------|----------|---------|----------|--------|
| 819        |                | Sardarshahar (M) |         | TW          | BHADAR JI                | 16/03/2018      | 16/03/2018          | 7.8 | 860        | 280            | 24      | 53.68     | 550      | 35      | 2.6      | 2070   |
| 820        |                | Sardarshahar (M) |         | TW          | ANJUMAN                  | 16/03/2018      | 16/03/2018          | 7.5 | 690        | 150            | 16      | 26.84     | 170      | 30      | 5.8      | 1070   |
| 821        |                | Sardarshahar (M) |         | TW          | TW-27                    | 16/03/2018      | 16/03/2018          | 7.6 | 870        | 260            | 20      | 51.24     | 230      | 30      | 3.0      | 1260   |
| 822        |                | Sardarshahar (M) |         | TW          | GALSHAL A                | 16/03/2018      | 16/03/2018          | 7.9 | 1220       | 320            | 28      | 61        | 1100     | 35      | 3.4      | 2620   |
| 823        |                | Sardarshahar (M) |         | TW          | BEHIND POLICE THANA      | 16/03/2018      | 16/03/2018          | 7.9 | 860        | 260            | 16      | 53.68     | 630      | 25      | 2.5      | 2000   |
| 824        |                | Sardarshahar (M) |         | TW          | OLD TW-19                | 16/03/2018      | 16/03/2018          | 7.7 | 860        | 190            | 12      | 39.04     | 330      | 20      | 5.0      | 1400   |
| 825        |                | Sardarshahar (M) |         | TW          | NEW TW-19                | 16/03/2018      | 16/03/2018          | 7.6 | 800        | 230            | 24      | 41.48     | 310      | 20      | 4.3      | 1300   |
| 826        |                | Sardarshahar (M) |         | TW          | WARD NO. 40              | 16/03/2018      | 16/03/2018          | 7.8 | 1120       | 160            | 12      | 31.72     | 370      | 25      | 12.9     | 1650   |
| 827        |                | Sardarshahar (M) |         | TW          | TW-39                    | 16/03/2018      | 16/03/2018          | 7.9 | 1100       | 150            | 16      | 26.84     | 280      | 25      | 11.7     | 1740   |
| 828        |                | Sardarshahar (M) |         | TW          | MATA G-MANDIR            | 16/03/2018      | 16/03/2018          | 7.7 | 980        | 260            | 24      | 48.8      | 330      | 30      | 2.9      | 1400   |
| 829        |                | Sardarshahar (M) |         | TW          | KHETARP AL               | 16/03/2018      | 16/03/2018          | 7.6 | 1050       | 120            | 16      | 19.52     | 330      | 25      | 4.5      | 1320   |
| 830        |                | Sardarshahar (M) |         | TW          | HANUMA N DHORA           | 16/03/2018      | 16/03/2018          | 7.5 | 710        | 230            | 12      | 48.8      | 380      | 35      | 2.9      | 1520   |
| 831        |                | Sardarshahar (M) |         | OW          | JAMADA                   | 16/03/2018      | 16/03/2018          | 7.9 | 480        | 200            | 16      | 39.04     | 700      | 35      | 2.1      | 2030   |
| 832        |                | Sardarshahar (M) |         | TW          | SUBEDAR                  | 16/03/2018      | 16/03/2018          | 7.8 | 980        | 290            | 24      | 56.12     | 470      | 30      | 2.7      | 1660   |
| 833        |                | Sardarshahar (M) |         | TW          | PIPALI CHOWK WARD NO. 13 | 16/03/2018      | 16/03/2018          | 7.7 | 690        | 320            | 24      | 63.44     | 450      | 30      | 2.9      | 1500   |
| 834        |                | Sardarshahar (M) |         | TW          | DHANI SUHANA             | 16/03/2018      | 16/03/2018          | 7.9 | 660        | 390            | 28      | 78.08     | 560      | 30      | 1.7      | 1600   |
| 835        |                | Sardarshahar (M) |         | TW          | KARANSAN                 | 16/03/2018      | 16/03/2018          | 8.0 | 560        | 940            | 52      | 197.64    | 1560     | 40      | 0.6      | 2760   |
| 836        |                | Sardarshahar (M) |         | TW          | SHIV SHAKTI              | 16/03/2018      | 16/03/2018          | 7.9 | 790        | 250            | 20      | 48.8      | 510      | 35      | 2.5      | 1870   |
| 837        |                | Sardarshahar (M) |         | TW          | TW-10                    | 16/03/2018      | 16/03/2018          | 7.6 | 640        | 320            | 16      | 68.32     | 430      | 30      | 1.7      | 1400   |
| 838        |                | Sardarshahar (M) |         | TW          | MOTOR MARKET             | 16/03/2018      | 16/03/2018          | 7.7 | 660        | 340            | 16      | 73.2      | 340      | 25      | 0.5      | 1250   |
| 839        |                | Sardarshahar (M) |         | TW          | BODIA                    | 16/03/2018      | 16/03/2018          | 7.9 | 1040       | 320            | 20      | 65.88     | 790      | 40      | 4.3      | 2360   |
| 840        |                | Sardarshahar (M) |         | TW          | TW-24                    | 16/03/2018      | 16/03/2018          | 7.6 | 770        | 120            | 16      | 19.52     | 370      | 30      | 3.5      | 1400   |
| 841        |                | Sardarshahar (M) |         | TW          | PANDYA                   | 16/03/2018      | 16/03/2018          | 7.6 | 840        | 150            | 20      | 24.4      | 380      | 35      | 3.5      | 1480   |
| 842        |                | Sardarshahar (M) |         | TW          | BAHADUR SINGH COLONY     | 16/03/2018      | 16/03/2018          | 7.5 | 710        | 200            | 20      | 36.6      | 410      | 30      | 3.4      | 1330   |
| 843        |                | Sardarshahar (M) |         | TW          | SOMNATH                  | 16/03/2018      | 16/03/2018          | 7.7 | 640        | 190            | 16      | 36.6      | 280      | 25      | 2.4      | 1150   |

Note :- All Results Except pH are in mg/l.

Remarks : Water is Potable (P)/Unpotable (U)  
No.Lab./Tech.(chem)/2018-19 819-350

Count-2

*(Signature)*  
Junior Chemist  
PHED Laboratory, District Laboratory



Office of the Junior Chemist  
Public Health Engineering Department, Rajasthan  
District Laboratory, Churu

| Gram Panchayat | Village/Town    | Habitation | Source Name | Location                       | Collection Date | Date of Examination | P.H. | Alkalinity | Total Hardness | Calcium | Magnesium | Chloride | Nitrate | Fluoride | T.D.S. |
|----------------|-----------------|------------|-------------|--------------------------------|-----------------|---------------------|------|------------|----------------|---------|-----------|----------|---------|----------|--------|
|                | Sardarsahar (M) |            | TW          | SONI                           | 16/03/2018      | 16/03/2018          | 8.0  | 920        | 380            | 24      | 78.08     | 960      | 40      | 2.5      | 2950   |
|                | Sardarsahar (M) |            | TW          | TW-2 WARD NO. 5                | 16/03/2018      | 16/03/2018          | 7.8  | 1300       | 340            | 28      | 65.88     | 670      | 35      | 7.2      | 2270   |
|                | Sardarsahar (M) |            | TW          | JALPHAT H                      | 16/03/2018      | 16/03/2018          | 7.7  | 630        | 260            | 16      | 53.68     | 410      | 30      | 2.2      | 1270   |
|                | Sardarsahar (M) |            | TW          | TW-11                          | 16/03/2018      | 16/03/2018          | 7.7  | 930        | 200            | 16      | 39.04     | 350      | 30      | 3.6      | 1400   |
|                | Sardarsahar (M) |            | TW          | MANGASA R                      | 16/03/2018      | 16/03/2018          | 7.8  | 310        | 260            | 16      | 53.68     | 360      | 35      | 1.8      | 1500   |
|                | Sardarsahar (M) |            | TW          | MANGASA R NR. PANCHAYAT SAMITI | 16/03/2018      | 16/03/2018          | 7.8  | 700        | 440            | 24      | 92.72     | 450      | 35      | 1.4      | 1640   |
|                | Sardarsahar (M) |            | CWR         | MAIN CITY                      | 16/03/2018      | 16/03/2018          | 7.4  | 90         | 70             | 8       | 12.2      | 40       | 10      | 0.2      | 220    |

Appendix 11: Biodiversity Assessment - Sardarshahar

Proximity Report  
IND RSTDSP - SARDARSHAHAR

Location: [28.4, 74.5]  
Date of analysis: 14 October 2019  
Buffers applied: 1km | 5km | 10km  
Generated by: Ninette Pajarillaga  
Company/Subscriber: ADB

Overlaps with:

|                        |    |
|------------------------|----|
| Protected Areas        | 0  |
| Key Biodiversity Areas | 0  |
| IUCN Red List          | 29 |



Displaying project location and buffers: 1km, 5km, 10km

## **About this report**

This report presents the results of [954-4541] proximity analysis to identify the biodiversity features and species which are located within the following buffers: 1km, 5km, 10km.

This report is one part of a package generated by IBAT on 14 October 2019 that includes full list of all species, protected areas, Key Biodiversity Areas in CSV format, maps showing the area of interest in relation to these features, and a 'How to read IBAT reports' document.

## **Data used to generate this report**

UNEP-WCMC and IUCN 2018, Protected Planet: The World Database on Protected Areas (WDPA)[On-line], Cambridge, UK: UNEP-WCMC and IUCN. Available at: [www.protectedplanet.net](http://www.protectedplanet.net). August 2018

BirdLife International (on behalf of the KBA Partnership), 2018. Key Biodiversity Areas: June 2018 version.

IUCN, 2018. IUCN Red List of Threatened Species. Version 2017.3.



**Protected Areas**

The following protected areas are found within 1km, 5km, 10km of the area of interest.  
For further details please refer to the associated csv file in the report folder.

No protected areas within buffer distance

**Key Biodiversity Areas**

The following key biodiversity areas are found within 1km, 5km, 10km of the area of interest.  
For further details please refer to the associated csv file in the report folder.

No KBAs within buffer distance

**IUCN Red List of Threatened Species**

The following threatened species are potentially found within 50km of the area of interest.

For the full IUCN Red List please refer to the associated csv in the report folder.

| Species name           | Common name            | IUCN Category | Taxonomic Class |
|------------------------|------------------------|---------------|-----------------|
| Anacyclus pyrethrum    | Atlas daisy            | VU            | Magnoliopsida   |
| Aquila heliaca         | Eastern imperial eagle | VU            | Aves            |
| Aquila nipalensis      | Steppe eagle           | EN            | Aves            |
| Aquila rapax           | Tawny eagle            | VU            | Aves            |
| Ardeotis nigriceps     | Great indian bustard   | CR            | Aves            |
| Aythya ferina          | Common pochard         | VU            | Aves            |
| Chlamydotis macqueenii | Asian houbara          | VU            | Aves            |
| Ciconia episcopus      | Asian woollyneck       | VU            | Aves            |
|                        |                        |               |                 |



| Species name                       | Common name           | IUCN Category | Taxonomic Class |
|------------------------------------|-----------------------|---------------|-----------------|
| <i>Clanga clanga</i>               | Greater spotted eagle | VU            | Aves            |
| <i>Columba eversmanni</i>          | Yellow-eyed pigeon    | VU            | Aves            |
| <i>Crocodylus palustris</i>        | Mugger                | VU            | Reptilia        |
| <i>Falco cherrug</i>               | Saker falcon          | EN            | Aves            |
| <i>Gyps bengalensis</i>            | White-rumped vulture  | CR            | Aves            |
| <i>Gyps indicus</i>                | Indian vulture        | CR            | Aves            |
| <i>Leptoptilos dubius</i>          | Greater adjutant      | EN            | Aves            |
| <i>Lutrogale perspicillata</i>     | Smooth-coated otter   | VU            | Mammalia        |
| <i>Manis crassicaudata</i>         | Indian pangolin       | EN            | Mammalia        |
| <i>Marmaronetta angustirostris</i> | Marbled teal          | VU            | Aves            |
| <i>Neophron percnopterus</i>       | Egyptian vulture      | EN            | Aves            |
| <i>Oryza malampuzhaensis</i>       |                       | VU            | Liliopsida      |
| <i>Oxyura leucocephala</i>         | White-headed duck     | EN            | Aves            |
| <i>Panthera pardus</i>             | Leopard               | VU            | Mammalia        |
| <i>Rusa unicolor</i>               | Sambar                | VU            | Mammalia        |
| <i>Rynchops albicollis</i>         | Indian skimmer        | VU            | Aves            |
| <i>Sarcogyps calvus</i>            | Red-headed vulture    | CR            | Aves            |

| Species name                   | Common name           | IUCN Category | Taxonomic Class |
|--------------------------------|-----------------------|---------------|-----------------|
| <i>Saxicola macrorhynchus</i>  | White-browed bushchat | VU            | Aves            |
| <i>Sterna acuticauda</i>       | Black-bellied tern    | EN            | Aves            |
| <i>Tetracerus quadricornis</i> | Four-horned antelope  | VU            | Mammalia        |
| <i>Vanellus gregarius</i>      | Sociable lapwing      | CR            | Aves            |

### **Biodiversity Assessment – Sardarshahar Town Water Supply and Sewerage Subproject**

#### **A. Introduction**


This detailed biodiversity assessment is carried out for the proposed Sardarshahar Town Sewerage Subproject located in Sardarshahar Town, Churu district of Rajasthan State in India. This subproject is included in the Rajasthan Secondary Towns Development Sector Project (RSTDSP) to be financed by ADB. The assessment has been carried out to identify critical habitats and anticipated impacts from the subproject implementation. The assessment is based on the desk review and analysis of the secondary information collected through various sources and supported by the results of the proximity report generated by the Integrated Biodiversity Assessment Tool (IBAT). The findings and assessment will be further strengthened following field assessments and consultations with key stakeholders involving forest and wildlife officials from the state before project implementation.

#### **B. Project Description**

The subproject is located in Sardarshahar Town of Churu District of Rajasthan State. All the project components are planned and will be located inside the municipality limits. The proposed clear water reservoir of 2400 kl capacity with one pump house and rehabilitation work of existing clear water reservoir and pump house at PHED campus, Hanumangrah road. Rehabilitation and refurbishment work of four existing overhead storage reservoir. There is planning for 193 km of water distribution network, rehabilitation of 26 tube/open well with replacement of pipes, pumps and other electro-mechanical items. Providing one chlorination room for disinfection of water prior to supply. Proposed construction of 2 nos.

of Consumer Relation Management Centers (CRMC), 1 no. of Central Control Centre (CCC) and 1 no. of Master Control Centre. There is total 68 km of new underground sewerage collection network along the existing road within available RoW and 14 nos. of sewer pumping stations. For the treatment of collected sewerage three treatment plants of 2.30 MLD, 3.40 MLD and 1.60 MLD capacity along with associated facilities and upgradation of two existing STPs are proposed for the city within Municipality jurisdictions. The location of subproject components in Sardarshahar Town on google map is given in Figure-1.

**Figure 23: Subproject component and town area on Google Map**

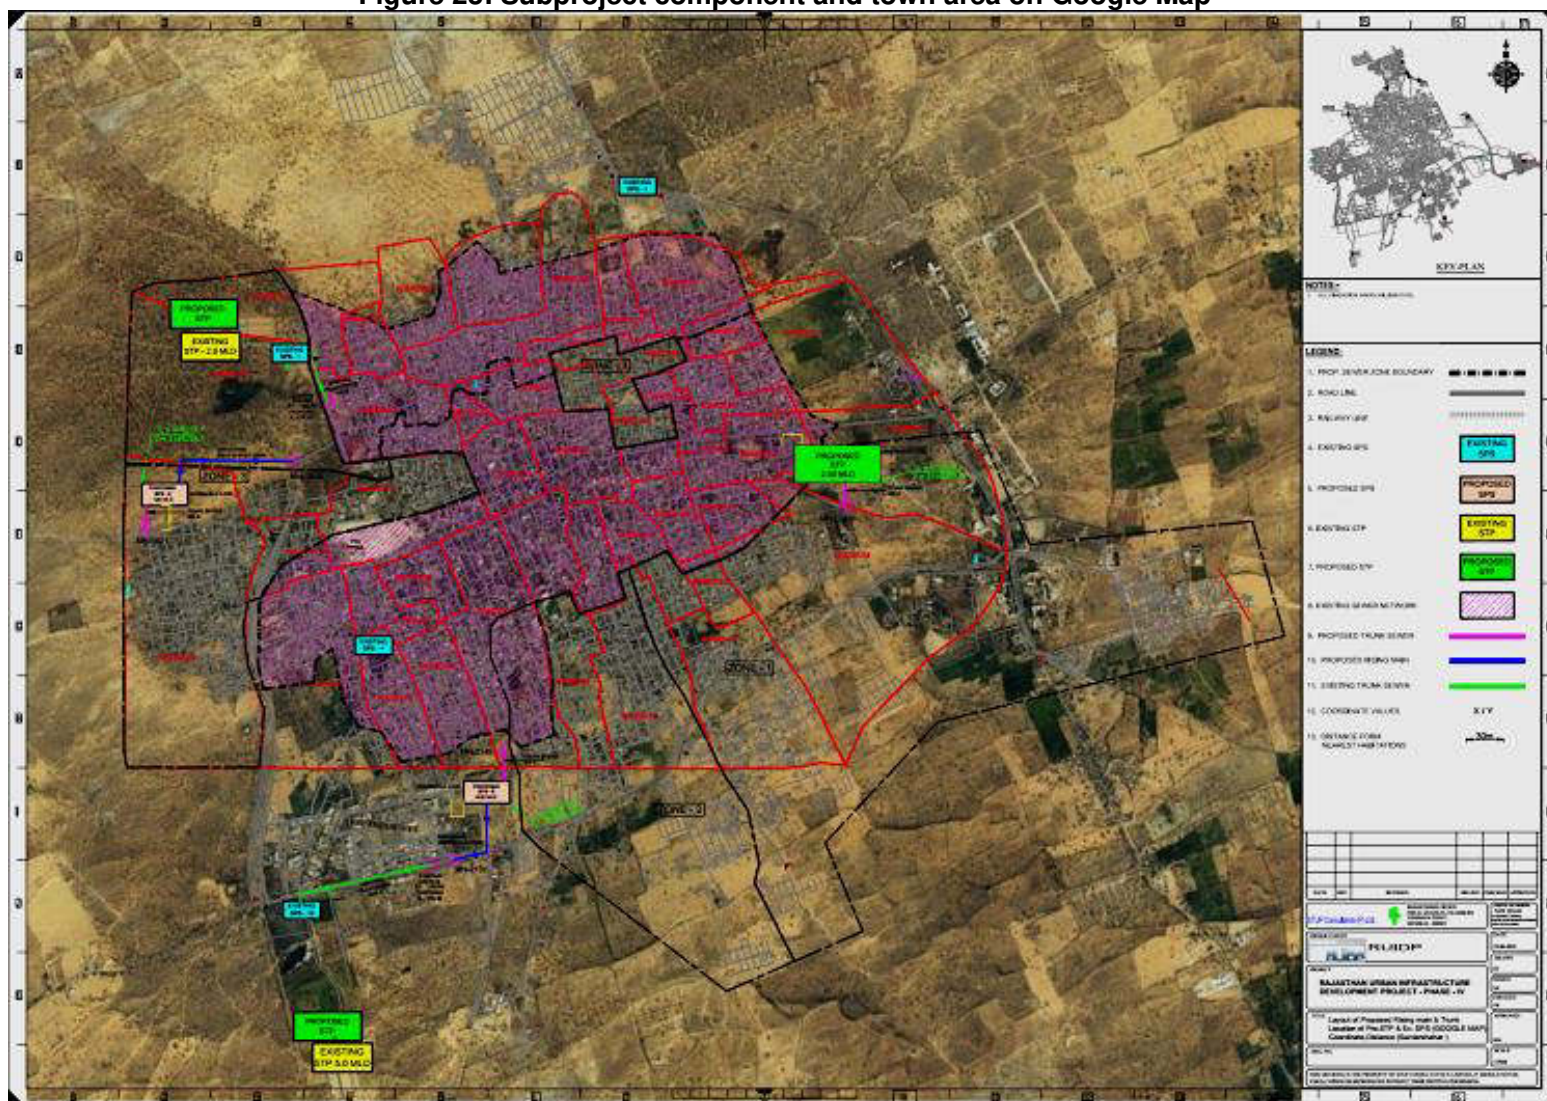



### C. Establishing project area of influence (PAI)

The project area of influence (PAI) is established on basis of locations on project components of proposed project. The scope of work covering all components and associated facilities under the subproject in Sardarshahar Town are considered as a project area of influence (PAI). The critical habitat assessment has been conducted within the boundaries of PAI which has been established using ecological units and/or physical features within the landscape such as roads, railway line or seasonally stream and village settlement. The established PAI for water supply and sewerage treatment system and facilities in Sardarshahar Town is given in Figure -2.

**Figure 24: Map showing boundary of PAI Sardarshahar Town subproject**



*The boundaries of PAI for subproject has been based on physical/topographical features surrounding Sardarshahar Town. In the east direction of the town State Highway -7 is running. The limits for project area of influence is established with a buffer of 1.5km parallel to the SH-7, to cover developed area along the road. To the south of the city there is SH-6 leading to NH-11, a distance of 1.5 km is taken as boundary of PAI. On the west direction of the town a village road from SH-6 to nearby village at distance of 1.5km almost parallel to railway tract has considered for limit of study area. The north of town is surrounded by Hariyasar Gharasotan habitation area and the same has taken for boundary of PAI.*

### D. Biodiversity Assessment

Biodiversity assessment in the project influence area has been conducted as per the International Finance Corporation's (IFC) Performance Standard No 6 of 2012, within updated version in June 2019 on the Guidance Note for the Performance Standard. The process of biodiversity assessment based on presence of protected or designated areas and the potential presence of Critical Habitat in the study area. The Critical Habitat assessment is based on presence of Threatened species (Critically Endangered (CR), Endangered (EN) species, and to a lesser extent Vulnerable (VU) species as defined by the IUCN.

### **D.1 Key Biodiversity Area**

The project areas have been screened to determine presence of Key Biodiversity Areas (KBAs) using the Integrated Biodiversity Assessment Tool (IBAT)<sup>46</sup>. As per the Proximity report generated by IBAT, provided as Appendix 10 of the IEE Report, there are neither protected area nor any key biodiversity areas within the buffer of 10km radius of the subproject components. The nearest protected area is Tal Chappar Wildlife Sanctuary; which is approx. 60 km away (nearest aerial distance) from the Sadarshahar town area. However, there are 29 International Union for the Conservation of Nature (IUCN) Red List threatened species. The key findings of the IBAT report are presented in the subsequent sections.

### **D.2 Protected Area- Tal Chappar Wildlife Sanctuary**

The area is nationally notified protected area under Wildlife Protection Act 1972, located on South west direction of the project town at an approx. 60 km nearest aerial distance. Figure-3 shows map of the Tal Chappar Wildlife Sanctuary area.

Tal Chappar sanctuary is located on Nokha- Sujangarh state Highway in the Sujangarh Tehsil of Churu District of Rajasthan State. The area of 7.19 sq.km within the Lat. 27°79'77.77" and Long. 74°43'71.30" was notified on 19<sup>th</sup> September 1962 as Wildlife Sanctuary for Black Buck (*Antelope cervicapra*). Tal Chappar sanctuary with almost flat tract and interspersed shallow low lying areas has open grassland with scattered Acacia and prosopis trees which give it an appearance of a typical Savanna. Some small hillocks and exposed rocks of slate and quartzite are found in the western side of the sanctuary. Area between hillocks and the sanctuary constitutes the watershed area of the sanctuary.

The salt pans located on the South-western boundary of the protected area. The migratory birds visit this area during winter starting from month of September. Birds commonly seen in the sanctuary are harriers, Eastern Imperial Eagle, Tawny Eagle, Short-toed Eagle, sparrow, and Little Green Bee-eaters, Black Ibis and Demoiselle


---

<sup>46</sup> IBAT is a multi-institutional programme of work involving BirdLife International, Conservation International, IUCN and UNEP-WCMC. IBAT provides a basic risk screening on biodiversity. It draws together information on globally recognised biodiversity information drawn from a number of IUCN's Knowledge Products: IUCN Red List of Threatened Species, Key Biodiversity Areas (priority sites for conservation) and Protected Planet/The World Database on Protected Areas (covering nationally and internationally recognised sites, including IUCN management categories I–VI, Ramsar Wetlands of International Importance and World Heritage sites).

Cranes, which have habitat in protected area by month of end March. The other bird species like skylark, crested lark, Ring Dove, brown dove and blue jay are seen throughout the year in the protected area. Desert fox and desert cat can also be spotted along with typical avifauna such as partridge and sand grouse.



Figure 25: Map showing Tal Chhappar Wildlife Sanctuary

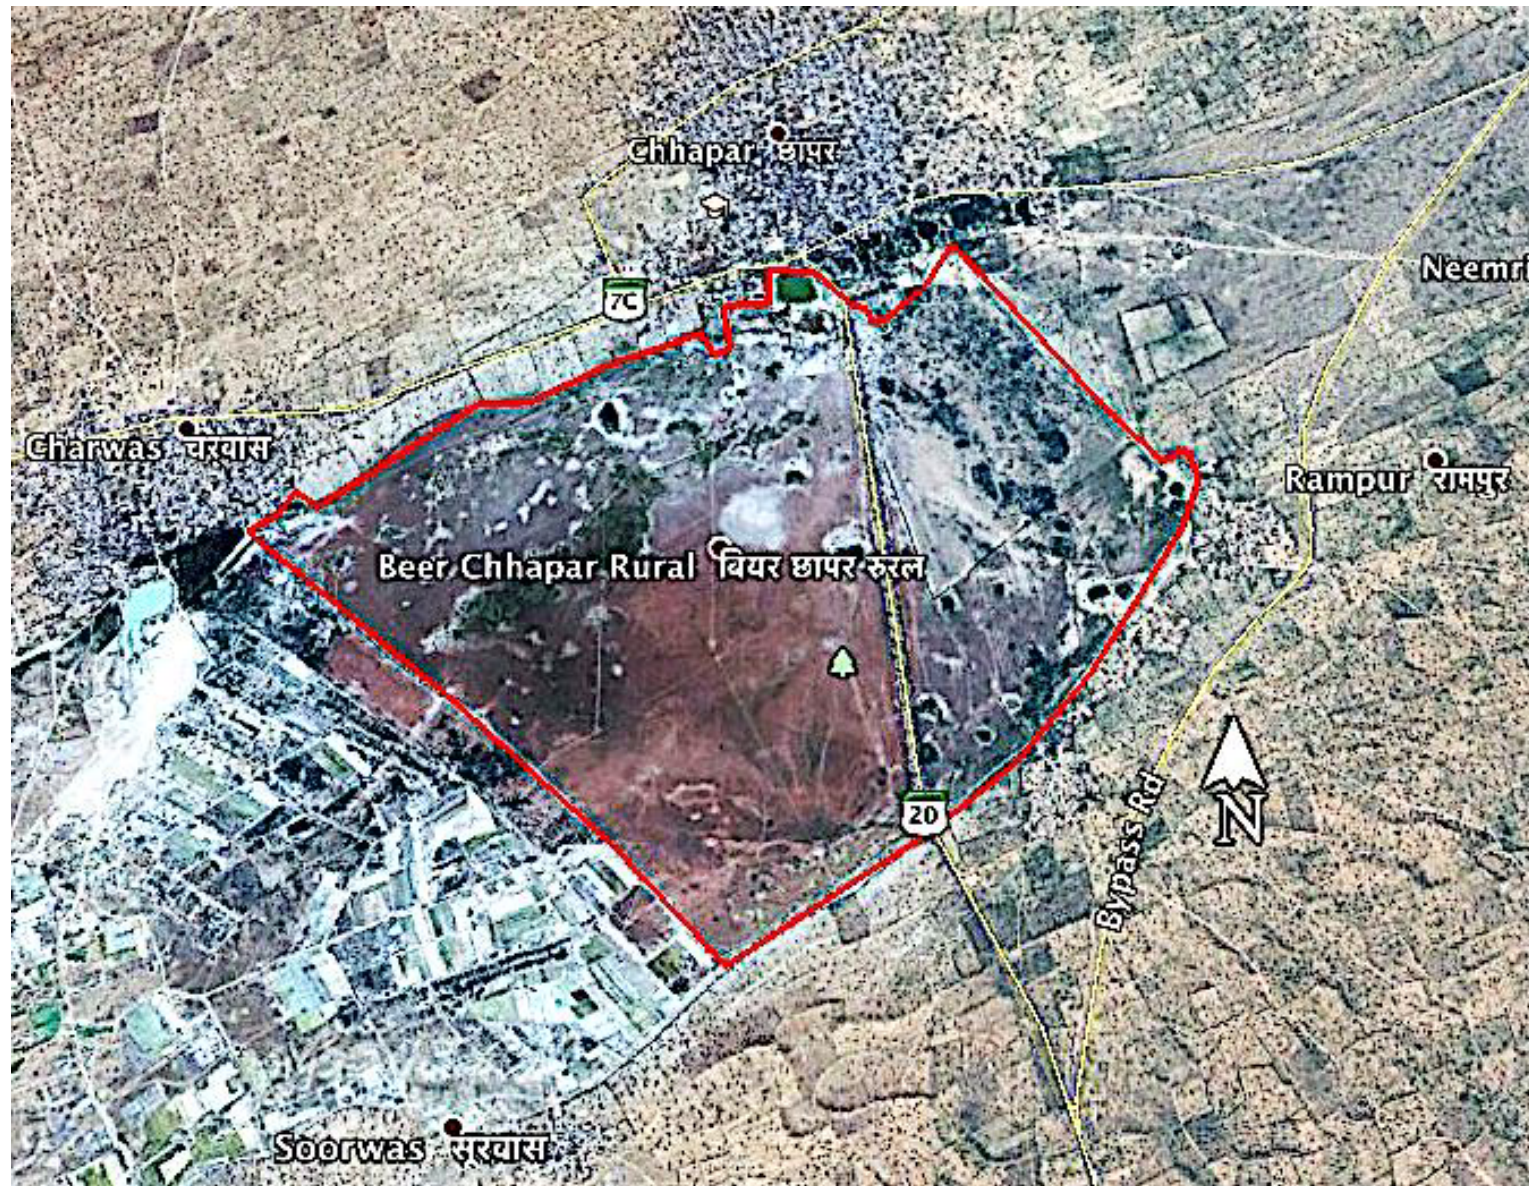



### D.3 Critically Endangered / Endangered Species:

A total of 29 IUCN red list (CR, EN & VU) species reported within 50km radius. Out of these 29 IUCN red list species, 12 species are classified as Critically Endangered (CR) and Endangered (EN). Birds are common species which includes 21 species (CR-5, EN-6 & VU-10), 5 mammals (EN-1, VU-4), 1 reptile (VU-1) and 2 plants (VU-2). Table-1 lists the species designated by the International Union for the Conservation of Nature (IUCN) as Critically Endangered (CR), Endangered (EN) and Vulnerable (VU) having recorded ranges that include the study area.

**Table 24: List of species designated by IUCN threatened species as CR, EN & VU**

| S.No. | Scientific Name               | Common Name            | IUCN Red List category |
|-------|-------------------------------|------------------------|------------------------|
|       | <b>Birds</b>                  |                        |                        |
| 1     | <i>Ardeotis nigriceps</i>     | Great Indian Bustard   | CR                     |
| 2     | <i>Vanellus gregarius</i>     | Sociable Lapwing       | CR                     |
| 3     | <i>Gyps bengalensis</i>       | White-rumped Vulture   | CR                     |
| 4     | <i>Sarcogyps calvus</i>       | Red-headed Vulture     | CR                     |
| 5     | <i>Gyps indicus</i>           | Indian Vulture         | CR                     |
| 6     | <i>Oxyura leucocephala</i>    | White-headed Duck      | EN                     |
| 7     | <i>Neophron percnopterus</i>  | Egyptian Vulture       | EN                     |
| 8     | <i>Aquila nipalensis</i>      | Steppe Eagle           | EN                     |
| 9     | <i>Falco cherrug</i>          | Saker Falcon           | EN                     |
| 10    | <i>Leptoptilos dubius</i>     | Greater Adjutant       | EN                     |
| 11    | <i>Sterna acuticauda</i>      | Black-bellied tern     | EN                     |
| 12    | <i>Antigone antigone</i>      | Sarus crane            | VU                     |
| 13    | <i>Aquila heliaca</i>         | Eastern imperial eagle | VU                     |
| 14    | <i>Aquila rapax</i>           | Tawny eagle            | VU                     |
| 15    | <i>Aythya ferina</i>          | Common pochard         | VU                     |
| 16    | <i>Chlamydotis macqueenii</i> | Asian houbara          | VU                     |
| 17    | <i>Ciconia episcopus</i>      | Asian woollyneck       | VU                     |
| 18    | <i>Clanga clanga</i>          | Greater spotted eagle  | VU                     |

|    |                                |                       |    |
|----|--------------------------------|-----------------------|----|
| 19 | <i>Columba eversmanni</i>      | Yellow-eyed pigeon    | VU |
| 20 | <i>Rynchops albicollis</i>     | Indian skimmer        | VU |
| 21 | <i>Saxicola macrorhynchus</i>  | White-browed bushchat | VU |
|    | <b>Mammals</b>                 |                       |    |
| 22 | <i>Manis crassicaudata</i>     | Indian Pangolin       | CR |
| 23 | <i>Lutrogale perspicillata</i> | Smooth-coated otter   | VU |
| 24 | <i>Panthera pardus</i>         | Leopard               | VU |
| 25 | <i>Tetracerus quadricornis</i> | Four-horned antelope  | VU |
| 26 | <i>Rusa unicolor</i>           | Sambar                | VU |
|    | <b>Reptile</b>                 |                       |    |
| 27 | <i>Crocodylus palustris</i>    | Mugger                | VU |
|    | <b>Plant</b>                   |                       |    |
| 28 | <i>Anacyclus pyrethrum</i>     | Atlas daisy           | VU |
| 29 | <i>Oryza malampuzhaensis</i>   | Asian Rice            | VU |

#### E. Critical Habitat Assessment Process:

Habitats that are critical to the survival of International Union for the Conservation of Nature (IUCN) designated Critically Endangered or Endangered species, migratory species, congregatory species and endemic or restricted range species are classified as critical habitats.

The screening of Critical Habitat in the area has been conducted based on species which enlisted in red list of IUCN. The presence of habitat of these species in the area will designate Critical Habitat. There are five criterion set out in updated Performance Standard No 6 Guidance note (IFC 2019) to consider the area as Critical Habitat. The five criterion for Critical Habitat determination is:

**Criterion 1: Critically Endangered and Endangered Species****Criterion 2: Endemic and Restricted range Species****Criterion 3: Migratory and Congregatory Species****Criterion 4: Highly Threatened or Unique Ecosystems****Criterion 5: Key Evolutionary Processes**

*Out of these five criteria, first three criteria are related to species and threshold of species enlisted in the IUCN Red list representing the risk of extinction of species at global level. While the criterion 4 & 5 are related to ecosystems and evolutionary processes. The brief description of criteria is mentioned in below sections.*

**E.1 Criterion 1: Critically Endangered and Endangered Species**

Species threatened with global extinction and listed as CR and EN on the IUCN Red List of Threatened Species shall be considered as part of Criterion 1. Critically Endangered species face an extremely high risk of extinction in the wild. Endangered species face a very high risk of extinction in the wild.

As described in footnote 11 of Performance Standard 6, the inclusion in Criterion 1 of species that are listed nationally/regionally as CR or EN in countries that adhere to IUCN guidance shall be determined on a project-by-project basis in consultation with competent professionals.

Thresholds for Criterion 1 are the following:

- a) Areas that support globally important concentrations of an IUCN Red-listed EN or CR species ( $\geq 0.5\%$  of the global population AND  $\geq 5$  reproductive units of a CR or EN species).
- b) Areas that support globally important concentrations of an IUCN Red-listed Vulnerable (VU) species, the loss of which would result in the change of the IUCN Red List status to EN or CR and meet the thresholds.
- c) As appropriate, areas containing important concentrations of a nationally or regionally listed EN or CR species.

**E.2 Criterion 2: Endemic and Restricted range Species**

For purposes of this Guidance Note, the term endemic is defined as restricted range. Restricted range refers to a limited extent of occurrence (EOO).

- For terrestrial vertebrates and plants, restricted range species are defined as those species that have an EOO less than 50,000 km<sup>2</sup>.
- For marine systems, restricted range species are provisionally being considered those with an EOO of less than 100,000 km<sup>2</sup>.
- For coastal, riverine, and other aquatic species in habitats that do not exceed 200 km width at any point (for example, rivers), restricted range is defined as having a global range of less than or equal to 500 km linear geographic span (i.e., the distance between occupied locations furthest apart).

The threshold for Criterion 2 is the following:

- a) Areas that regularly hold  $\geq 10\%$  of the global population size and  $\geq 10$  reproductive units of a species.

### **E.3 Criterion 3: Migratory and Congregatory Species**

Migratory species are defined as any species of which a significant proportion of its members cyclically and predictably move from one geographical area to another (including within the same ecosystem).

Congregatory species are defined as species whose individuals gather in large groups on a cyclical or otherwise regular and/or predictable basis. Examples include the following:

- Species that form colonies.
- Species that form colonies for breeding purposes and/or where large numbers of individuals of a species gather at the same time for non-breeding purposes (for example, foraging and roosting).
- Species that utilise a bottleneck site where significant numbers of individuals of a species occur in a concentrated period of time (for example, for migration).
- Species with large but clumped distributions where a large number of individuals may be concentrated in a single or a few sites while the rest of the species is largely dispersed (for example, wildebeest distributions).
- Source populations where certain sites hold populations of species that make an inordinate contribution to recruitment of the species elsewhere (especially important for marine species).

Thresholds for Criterion 3 are the following:

- a) Areas known to sustain, on a cyclical or otherwise regular basis,  $\geq 1$  percent of the global population of a migratory or congregatory species at any point of the species' lifecycle.
- b) Areas that predictably support  $\geq 10$  percent of the global population of a species during periods of environmental stress.

### **E.4 Criterion 4: Highly Threatened or Unique Ecosystems**

The IUCN is developing a Red List of Ecosystems, following an approach similar to the Red List for Threatened Species. The client should use the Red List of Ecosystems where formal IUCN assessments have been performed. Where formal IUCN assessments have not been performed, the client may use assessments using systematic methods at the national/regional level, carried out by governmental bodies, recognized academic institutions and/or other relevant qualified organizations (including internationally recognized Non-Government Organizations (NGOs)).

The thresholds for Criterion 4 are the following:

- a) Areas representing  $\geq 5\%$  of the global extent of an ecosystem type meeting the criteria for IUCN status of CR or EN.
- b) Other areas not yet assessed by IUCN but determined to be of high priority for conservation by regional or national systematic conservation planning.

## **E.5 Criterion 5: Key Evolutionary Processes**

The structural attributes of a region, such as its topography, geology, soil, temperature, and vegetation, and combinations of these variables, can influence the evolutionary processes that give rise to regional configurations of species and ecological properties. In some cases, spatial features that are unique or idiosyncratic of the landscape have been associated with genetically unique populations or subpopulations of plant and animal species. Physical or spatial features have been described as surrogates or spatial catalysts for evolutionary and ecological processes, and such features are often associated with species diversification. Maintaining these key evolutionary processes inherent in a landscape as well as the resulting species (or subpopulations of species) has become a major focus of biodiversity conservation in recent decades, particularly the conservation of genetic diversity. By conserving species diversity within a landscape, the processes that drive speciation, as well as the genetic diversity within species, ensures the evolutionary flexibility in a system, which is especially important in a rapidly changing climate.

For illustrative purposes, some potential examples of spatial features associated with evolutionary processes are as follows:

- Landscapes with high spatial heterogeneity are a driving force in speciation, as species are naturally selected based on their ability to adapt and diversify.
- Environmental gradients, also known as ecotones, produce transitional habitat, which has been associated with the process of speciation and high species and genetic diversity.
- Edaphic interfaces are specific juxtapositions of soil types (for example, serpentine outcrops, limestone, and gypsum deposits), which have led to the formation of unique plant communities characterized by both rarity and endemism.
- Connectivity between habitats (for example, biological corridors) ensures species migration and gene flow, which is especially important in fragmented habitats and for the conservation of metapopulations. This also includes biological corridors across altitudinal and climatic gradients and from “crest to coast.”
- Sites of demonstrated importance to climate change adaptation for either species or ecosystems are also included within this criterion.

## **F. Critical Habitat Assessment in PAI**

A critical habitat assessment has been carried out using the above mentioned five criterion of Performance Standard No 6 Guidance note (IFC 2019).

### **F.1 IBAT study output for habitat analysis (Criteria 1-3)**

A habitat analysis carried out for the Critically Endangered (CR) and Endangered species (EN) reported in the project area of influence (50km) shows that it is likely that the 29 species identified in IBAT are mostly located inside the ecological areas and not within the project area of influence (PAI). Details of the habitat analysis in the PAI is presented in Table-2.

# Initial Environmental Examination

---

Document Stage: Updated  
Project Number: 42267-031  
August 2021

India: Rajasthan Secondary Towns Development  
Sector Project – Sardarshahar Water Supply and  
Sewerage Subproject, District - Churu, Rajasthan

Part 2 of 3 (pages 250-351)

Prepared by Project Management Unit, Rajasthan Urban Drinking Water Sewerage and Infrastructure Corporation Limited, Government of Rajasthan for the Asian Development Bank. This is an updated version of the draft originally posted in March 2020 available on <https://www.adb.org/projects/documents/ind-42267-031-iee-3>.

This updated initial environmental examination report is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, management, or staff, and may be preliminary in nature. Your attention is directed to the “terms of use” section on ADB’s website.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.



Table 25: Habitat Analysis in PAI – Sadarshahar Subproject

| S. No.       | Common Name<br>( <i>Species Name</i> )                | IUCN Category | Habitat Preferences                                           | Likelihood of Occurrence in PAI                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------|-------------------------------------------------------|---------------|---------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Birds</b> |                                                       |               |                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 1            | Great Indian Bustard<br>( <i>Ardeotis nigriceps</i> ) | CR            | Grassland - Subtropical/Tropical Dry                          | None: Possible range extend in State of Rajasthan. The species occurs in the Indian Subcontinent, with strongholds in the Thar desert in the north-west and the Deccan tableland of the Peninsula. Mainly found in Western Rajasthan with small population in in Gujarat, Maharashtra, Andhra Pradesh and Karnataka.<br><br><a href="https://www.iucnredlist.org/species/22691932/134188105#geographic-range">https://www.iucnredlist.org/species/22691932/134188105#geographic-range</a> |
| 2            | Sociable Lapwing<br>( <i>Vanellus gregarious</i> )    | CR            | Desert, Wetlands (inland), Grassland, Artificial/Terrestrial  | None; The species occurs in the north-west part of India, as non-breeding habitat, mainly in Great Rann of Kutch.<br><br><a href="https://www.iucnredlist.org/species/22694053/130586388#habitat-ecology">https://www.iucnredlist.org/species/22694053/130586388#habitat-ecology</a>                                                                                                                                                                                                      |
| 3            | White-rumped vulture<br>( <i>Gyps</i>                 | CR            | Forest, Grassland, Shrubland, Savanna, Artificial/Terrestrial | Yes, the species habitat in South Asia and South-east Asia. Habitat reported in North India including Rajasthan state.                                                                                                                                                                                                                                                                                                                                                                    |

| S. No. | Common Name<br>( <i>Species Name</i> )               | IUCN Category | Habitat Preferences                                                                                | Likelihood of Occurrence in PAI                                                                                                                                                                                                                                                                                                                                          |
|--------|------------------------------------------------------|---------------|----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        | <i>bengalensis</i> )                                 |               |                                                                                                    | <a href="https://www.iucnredlist.org/species/22695194/118307773">https://www.iucnredlist.org/species/22695194/118307773</a>                                                                                                                                                                                                                                              |
| 4      | Red-headed Vulture<br>( <i>Sarcogyps calvus</i> )    | CR            | Forest, Grassland, Shrubland, Savanna, Artificial/Terrestrial                                      | Yes; distributed in parts of Rajasthan State, habitat extend mainly in North India.<br><br><a href="https://www.iucnredlist.org/species/22695254/118371885">https://www.iucnredlist.org/species/22695254/118371885</a>                                                                                                                                                   |
| 5      | Indian Vulture<br>( <i>Gyps indicus</i> )            | CR            | Forest, Grassland, Shrubland, Savanna, Artificial/Terrestrial                                      | Yes; possibility of habitat in Rajasthan, species breeds in south-east Pakistan and peninsular India south of the Gangetic plain, north to Delhi, east through Madhya Pradesh, south to the Nilgiris, and occasionally further south.<br><br><a href="https://www.iucnredlist.org/species/22729731/117875047">https://www.iucnredlist.org/species/22729731/117875047</a> |
| 6      | White-headed Duck ( <i>Oxyura leucocephala</i> )     | EN            | Wetlands (inland), Artificial/Aquatic & Marine, Marine Coastal/Supratidal                          | None: Habitat range in South Asia is limited to Pakistan and rarely reported in India.<br><br><a href="https://www.iucnredlist.org/species/22679814/119403602">https://www.iucnredlist.org/species/22679814/119403602</a>                                                                                                                                                |
| 7      | Egyptian Vulture<br>( <i>Neophron percnopterus</i> ) | EN            | Rocky areas (eg. inland cliffs, mountain peaks), Wetlands (inland), Grassland, Shrubland, Savanna, | Yes; extend of migratory bird species breeding habitat during winter in India including Rajasthan state.<br><br><a href="https://www.iucnredlist.org/species/22695180/154895845">https://www.iucnredlist.org/species/22695180/154895845</a>                                                                                                                              |

| S. No. | Common Name<br>( <i>Species Name</i> )            | IUCN Category | Habitat Preferences                                                                | Likelihood of Occurrence in PAI                                                                                                                                                                                                                 |
|--------|---------------------------------------------------|---------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        |                                                   |               | Artificial/Terrestrial                                                             |                                                                                                                                                                                                                                                 |
| 8      | Steppe Eagle<br>( <i>Aquila nipalensis</i> )      | EN            | Rocky areas (eg. inland cliffs, mountain peaks), Grassland, Savanna                | Yes; extend of migratory bird species non-breeding habitat during winter in India including Rajasthan state.<br><br><a href="https://www.iucnredlist.org/species/22696038/155419092">https://www.iucnredlist.org/species/22696038/155419092</a> |
| 9      | Saker Falcon<br>( <i>Falco cherrug</i> )          | EN            | Marine Intertidal, Wetlands (inland), Grassland, Shrubland, Artificial/Terrestrial | Yes; extend of migratory bird species non-breeding habitat during winter in India including Rajasthan state.<br><br><a href="https://www.iucnredlist.org/species/22696495/110525916">https://www.iucnredlist.org/species/22696495/110525916</a> |
| 10     | Greater Adjutant<br>( <i>Leptoptilos dubius</i> ) | EN            | Forest, Wetlands (inland), Artificial/Terrestrial, Grassland                       | None; in India species breeding habitat extend is limited in Assam and Bihar state only.<br><br><a href="https://www.iucnredlist.org/species/22697721/93633471">https://www.iucnredlist.org/species/22697721/93633471</a>                       |
| 11     | Black-bellied Tern ( <i>Sterna acuticauda</i> )   | EN            | Wetlands (inland)                                                                  | None: breeding range extend into parts of India excluding Rajasthan State.<br><br><a href="https://www.iucnredlist.org/species/22694711/110488626">https://www.iucnredlist.org/species/22694711/110488626</a>                                   |

| S. No. | Common Name<br>( <i>Species Name</i> )              | IUCN Category | Habitat Preferences                                                                        | Likelihood of Occurrence in PAI                                                                                                                                                                                                                                                                                                            |
|--------|-----------------------------------------------------|---------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 12     | Sarus crane<br>( <i>Antigone antigone</i> )         | VU            | Grassland,<br>Artificial/Terrestrial,<br>Wetlands (inland),<br>Artificial/Aquatic & Marine | None; habitat extend of the bird species resident is mainly in Uttar Pradesh State and nearby areas of surrounding states, breeding habitat during winter extended in adjoining areas of Rajasthan state.<br><br><a href="https://www.iucnredlist.org/species/22692064/93335364">https://www.iucnredlist.org/species/22692064/93335364</a> |
| 13     | Eastern imperial eagle<br>( <i>Aquila heliaca</i> ) | VU            | Forest, Wetlands (inland),<br>Grassland, Shrubland,<br>Artificial/Terrestrial              | None; in India species non-breeding habitat extend is limited in Northern parts only.<br><br><a href="https://www.iucnredlist.org/species/22696048/155464885">https://www.iucnredlist.org/species/22696048/155464885</a>                                                                                                                   |
| 14     | Tawny eagle<br>( <i>Aquila rapax</i> )              | VU            | Forest, Grassland,<br>Shrubland, Savanna,<br>Artificial/Terrestrial                        | Yes; habitat extend of the bird species resident is mainly in central India including Rajasthan state<br><br><a href="https://www.iucnredlist.org/species/22696033/131671001">https://www.iucnredlist.org/species/22696033/131671001</a>                                                                                                   |
| 15     | Common pochard<br>( <i>Aythya ferina</i> )          | VU            | Marine Neritic, Wetlands (inland), Marine Coastal/Supratidal,                              | None; the migratory bird specie's non-breeding habitat extend during winter season is limited in eastern and northern parts of India                                                                                                                                                                                                       |

| S. No. | Common Name<br>( <i>Species Name</i> )             | IUCN Category | Habitat Preferences                                                                                                          | Likelihood of Occurrence in PAI                                                                                                                                                                                                                                                |
|--------|----------------------------------------------------|---------------|------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        |                                                    |               | Artificial/Aquatic & Marine                                                                                                  | <a href="https://www.iucnredlist.org/species/22680358/155473754">https://www.iucnredlist.org/species/22680358/155473754</a>                                                                                                                                                    |
| 16     | Asian houbara<br>( <i>Chlamydotis macqueenii</i> ) | VU            | Desert, Grassland, Artificial/Terrestrial                                                                                    | None; in India species non-breeding habitat extend is limited in western parts of Punjab and Rajasthan State.<br><br><a href="https://www.iucnredlist.org/species/22733562/155425140">https://www.iucnredlist.org/species/22733562/155425140</a>                               |
| 17     | Asian woollyneck<br>( <i>Ciconia episcopus</i> )   | VU            | Marine Intertidal, Forest, Artificial/Terrestrial, Artificial/Aquatic & Marine, Grassland, Wetlands (inland), Marine Neritic | Yes; the species is found patchily across South Asia and South East Asia, range extends throughout India<br><br><a href="https://www.iucnredlist.org/species/22727255/110064997">https://www.iucnredlist.org/species/22727255/110064997</a>                                    |
| 18     | Greater spotted eagle ( <i>Clanga clanga</i> )     | VU            | Forest, Wetlands (inland), Shrubland, Artificial/Aquatic & Marine, Grassland                                                 | Yes; the species non-breeding habitat is found across South Asia and South East Asia, range extends throughout northeast and Northern India<br><br><a href="https://www.iucnredlist.org/species/22696027/110443604">https://www.iucnredlist.org/species/22696027/110443604</a> |
| 19     | Yellow-eyed pigeon<br>( <i>Columba</i> )           | VU            | Desert, Caves and Subterranean Habitats (non-aquatic), Wetlands                                                              | None; in India species non-breeding habitat extend is limited in north-west parts including parts of Rajasthan State.                                                                                                                                                          |

| S. No.         | Common Name<br>( <i>Species Name</i> )                     | IUCN Category | Habitat Preferences                         | Likelihood of Occurrence in PAI                                                                                                                                                                                                                                                                                                                                                          |
|----------------|------------------------------------------------------------|---------------|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                | <i>eversmanni</i> )                                        |               | (inland), Shrubland, Artificial/Terrestrial | <a href="https://www.iucnredlist.org/species/22690097/110099638">https://www.iucnredlist.org/species/22690097/110099638</a>                                                                                                                                                                                                                                                              |
| 20             | Indian skimmer<br>( <i>Rynchops albicollis</i> )           | VU            | Wetlands (inland)                           | Yes; the species is found patchily across India; range extends throughout Rajasthan State.<br><br><a href="https://www.iucnredlist.org/species/22694268/110600990">https://www.iucnredlist.org/species/22694268/110600990</a>                                                                                                                                                            |
| 21             | White-browed bushchat<br>( <i>Saxicola macrorhynchus</i> ) | VU            | Desert, Grassland, Shrubland                | None; The species is endemic to the north-west Indian subcontinent, distribution recorded in Punjab, Haryana, Uttar Pradesh, Rajasthan and Gujarat. The recent regular records of this species from Tal Chhapar in Churu district of Rajasthan State.<br><br><a href="https://www.iucnredlist.org/species/22710160/110578039">https://www.iucnredlist.org/species/22710160/110578039</a> |
| <b>Mammals</b> |                                                            |               |                                             |                                                                                                                                                                                                                                                                                                                                                                                          |

| S. No. | Common Name<br>( <i>Species Name</i> )                     | IUCN Category | Habitat Preferences                                                                                                                        | Likelihood of Occurrence in PAI                                                                                                                                                                              |
|--------|------------------------------------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 22     | Indian Pangolin<br>( <i>Manis crassicaudata</i> )          | CR            | Forest, Savanna, Shrubland, Artificial/Terrestrial, Grassland                                                                              | Yes; species is distributed in South Asia through much of India including Rajasthan<br><a href="https://www.iucnredlist.org/species/12761/123583998">https://www.iucnredlist.org/species/12761/123583998</a> |
| 23     | Smooth-coated otter ( <i>Lutrogale perspicillata</i> )     | VU            | Artificial/Aquatic & Marine, Wetlands (inland), Forest, Grassland, Marine Coastal/Supratidal, Marine Neritic, Marine Intertidal, Shrubland | Yes; species is distributed in South Asia through much of India including Rajasthan<br><a href="https://www.iucnredlist.org/species/12427/21934884">https://www.iucnredlist.org/species/12427/21934884</a>   |
| 24     | Leopard<br>( <i>Panthera pardus</i> )                      | VU            | Forest, Desert, Rocky areas (eg. inland cliffs, mountain peaks), Grassland, Savanna, Shrubland                                             | None; Leopard range widespread in inside and outside Protected Areas of India.<br><a href="https://www.iucnredlist.org/species/15954/160698029">https://www.iucnredlist.org/species/15954/160698029</a>      |
| 25     | Four-horned antelope<br>( <i>Tetracerus quadricornis</i> ) | VU            | Forest, Shrubland                                                                                                                          | None; species habitat is extended most parts of India including Rajasthan<br><a href="https://www.iucnredlist.org/species/21661/50195368">https://www.iucnredlist.org/species/21661/50195368</a>             |



| S. No.         | Common Name<br>( <i>Species Name</i> )     | IUCN Category | Habitat Preferences                                                              | Likelihood of Occurrence in PAI                                                                                                                                                                                                            |
|----------------|--------------------------------------------|---------------|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 26             | Sambar ( <i>Rusa unicolor</i> )            | VU            | Forest, Artificial/Terrestrial, Savanna, Shrubland, Grassland, Wetlands (inland) | None; the habitat extend is throughout India except North India and western parts of Rajasthan and Gujarat state.<br><a href="https://www.iucnredlist.org/species/41790/85628124">https://www.iucnredlist.org/species/41790/85628124</a>   |
| <b>Reptile</b> |                                            |               |                                                                                  |                                                                                                                                                                                                                                            |
| 27             | Mugger ( <i>Crocodylus palustris</i> )     | VU            | Wetlands (inland), Marine Neritic, Artificial/Aquatic & Marine                   | None; the species habitat extends in India to waterbodies including rivers, in Rajasthan State mainly in River Chambal.<br><a href="https://www.iucnredlist.org/species/5667/3046723">https://www.iucnredlist.org/species/5667/3046723</a> |
| <b>Plant</b>   |                                            |               |                                                                                  |                                                                                                                                                                                                                                            |
| 28             | Atlas daisy ( <i>Anacyclus pyrethrum</i> ) | VU            | Rocky areas (eg. inland cliffs, mountain peaks), Forest, Grassland, Shrubland    | Yes; the plant species is native to India and extend of occurrence in Rajasthan State.<br><a href="https://www.iucnredlist.org/species/202924/121743450">https://www.iucnredlist.org/species/202924/121743450</a>                          |

| S.<br>No. | Common<br>Name<br>( <i>Species<br/>Name</i> )           | IUCN<br>Category | Habitat Preferences                                                                                                               | Likelihood of Occurrence in PAI                                                                                                                                                                  |
|-----------|---------------------------------------------------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 29        | Asian Rice<br>( <i>Oryza<br/>malampuzhaen<br/>sis</i> ) | VU               | Particularly found in forest reserves either in marshy fields or along the margins of streams or rivulets in the forest interiors | None; the species is endemic to the Kerala region in India.<br><br><a href="https://www.iucnredlist.org/species/112680709/113899465">https://www.iucnredlist.org/species/112680709/113899465</a> |

## **F.2 Assessment output based on Criteria 4 & 5:**

The ecosystem within the project area of influence has not been assessed to date under IUCN assessment for the extinction threat to species. The ecosystem within the PAI is not considered to be highly threatened, as main land use is of residential, commercial & industrial in urban or agricultural in the surrounding locality. Further, there is no key evolutionary processes<sup>47</sup> within the PAI, as the key indicator for evolutionary process areas is presence of a high number of endemic or range restricted species. Therefore, the project area of influence does not meet the thresholds set out in Criterion 4 & 5.

## **F.3 Protected Areas:**

As per ADB's SPS 2009; the designated<sup>48</sup> or proposed protected areas at national and international level should be considered as Critical Habitat. In the PAI for subproject in Sadarshahar Town there is no national protected area and no international designated site or proposed and notified protected area. The nearest national protected area is Tal Chappar Wildlife Sanctuary, which is approx. 60 km away from the PAI boundary established for critical habitat assessment study.

## **G. Impacts & Mitigation Measures**

*The project components are proposed to be implemented within the developed areas of Sardarshahar Town and on land under municipal limits. The project area is approx. 60 km (nearest aerial distance) away from the boundary of Tal Chappar Wildlife Sanctuary. The protected area of Tal Chappar has also been established as an IBA site due to migratory birds visit the area during winter season.*

The species of vulture and eagle reported from Tal Chappar wildlife sanctuary or passing by may visit the project area due to extend range of habitat or in search of food during migration period. The availability of these species in the PAI need to be confirmed with local community and district forest and wildlife department.

Implementation of subproject for water supply and sewage treatment plant for the town will result in reduce in waste water in reservoir. It is generally known that birds generally migrate in winter season. The treated water from proposed sewerage treatment plant will be used for irrigation purposes in agriculture fields and horticulture plantation in area. This will increase in food sources and with horticulture plantation will be improve settler and nesting ground for birds.

Construction workers may hunt, birds or carry out other activities that will negatively impact wildlife. No construction or labour camps, batching plants, and quarrying activities will be allowed within or near the satellite wetland area. The contractor will clearly brief the construction workers on strict forestry rules on illegal harvesting of forest products and

---

<sup>47</sup> The evolutionary processes often occur in an isolated habitat and ecosystem due to physical or biological barriers, for example habitat on islands or valley.

<sup>48</sup> As per ADB's SPS the sites which are of international designation, such as Ramsar and UNESCO sites should be considered as Critical Habitat.

poaching of wildlife. Contractor will ensure supply of all necessary food items; cooking fuel and proper housing is provided to prevent illegal hunting and tree felling.

The operation of various construction equipment is likely to generate significant noise. Noise disturbance may cause migration of the birds to other areas which may increase the probability of habitat loss. Setting of construction camp near forests or protected area may generally disturb surrounding fauna.

The such impacts on avifauna can be mitigated by following measures:

- Project improvement proposals are restricted to available land with minimal tree cutting.
- Adequate measure is included in the design for development of green belt development and horticulture plantation scheme at proposed STP area.
- Noise generating equipment like DG set, compressors will have acoustic enclosures. Noise generating activities should not be permitted during night.
- Workers should be warned about wild life protected areas and possible movement.
- project staff and work crews should not be allowed to have fire-arms and animal traps etc.;
- construction facilities such as workers camp, construction camp, batching plant should be located at least 1 km away from any the forest stretches.
- employment agreements should specify heavy penalties for illegal hunting, trapping and wildlife trading – all other ancillary works should also agree not to participate in such activities.
- Strict anti-poaching surveillance measures need to be implemented, especially during project construction phase.

The anticipated impacts on ecological system due to project and proposed mitigation measures for EMP are provided in Table -3.

Table 26: Impact-mitigation measures for EMP

| Field                                               | Anticipated Impact                                                                                           | Mitigation Measure                                                                                                                                                                                                     | Responsible for Implementation | Monitoring of Mitigation | Cost and Source of Funds                                                |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------|-------------------------------------------------------------------------|
| <b>Design</b>                                       |                                                                                                              |                                                                                                                                                                                                                        |                                |                          |                                                                         |
| Site selection for project component implementation | Disruption of biodiversity & damage to habitat due to project infrastructure at specified location           | (i) Avoid or no land acquisition in forest area or in notified wildlife area                                                                                                                                           | PIU/PMU                        | PMU                      | No cost required<br><br>Mitigation measures are part of project design  |
| Water in wastewater drain and tree cutting          | Sources of food and water for birds in the area                                                              | (i) Green belt and landscaping development plan at location of proposed STP                                                                                                                                            | PIU/PMU                        | PMU                      | No cost required<br><br>mitigation measures are part of project design  |
| Permission                                          | Failure to obtain necessary permits for tree cutting can result to design revisions and/or stoppage of works | (i) Ensure all permission before start of construction in place<br>(ii) Removal of trees after verification and approval from concerned agency<br>(iii) Plantation of three trees against every single tree removed    | PIU/PMU                        | PMU                      | No cost required<br><br>mitigation measures are part of project design  |
| <b>Construction</b>                                 |                                                                                                              |                                                                                                                                                                                                                        |                                |                          |                                                                         |
| Construction camp location                          | Impacts on forest resources for establishing construction camp and plants.                                   | (i) Prior approvals for establishing construction facilities from PMU with submission of location details<br>(ii) Construction facilities such as workers camp, construction camp, batching plant should be located at | Construction Contractor        | PMU                      | Cost for implementation of mitigation measures<br><br>responsibility of |

| Field                                                                                        | Anticipated Impact                                                                                                                                  | Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                       | Responsible for Implementation | Monitoring of Mitigation | Cost and Source of Funds                                                    |
|----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------|-----------------------------------------------------------------------------|
|                                                                                              |                                                                                                                                                     | least 1 km away from Satellite Wetland and the forest stretches                                                                                                                                                                                                                                                                                                                                          |                                |                          | contractor                                                                  |
| Construction work camps, hot mix plants, stockpile areas, storage areas, and disposal areas. | (i) Impact due to noise generated from project activities<br>(ii) Contamination of water and soil due to construction waste disposal in forest area | (i) Minimize noise from construction equipment by using vehicle silencers, fitting jackhammers with noise-reducing mufflers to reduce impact to surrounding sensitive receptor; and<br>(ii) Prepare and implement construction waste management plan<br>(iii) Disposal of waste at designated sites and approval from local authorities<br>(iv) Conduct surface quality monitoring according to the EMP. | Construction Contractor        | PMU                      | Cost for implementation of mitigation measures responsibility of contractor |
| Construction Workers                                                                         | Involvement in illegal hunting, trapping and wildlife trading                                                                                       | (i) Awareness training to workers on wildlife presence in the project area and protection of wildlife.<br>(ii) Reporting to PMU on slighting of wild animals in the project area.<br>(iii) Employment agreements should specify heavy penalties for illegal hunting, trapping and wildlife trading – all other ancillary works should also agree not to                                                  | Construction Contractor        | PMU                      | Cost for implementation of mitigation measures responsibility of contractor |

| Field                    | Anticipated Impact                                                                                                                                                         | Mitigation Measure                                                                                                                                                                                                                    | Responsible for Implementation | Monitoring of Mitigation | Cost and Source of Funds |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------|--------------------------|
|                          |                                                                                                                                                                            | participate in such activities.<br>(iv) Strict anti-poaching surveillance measures need to be implemented, especially during project construction phase                                                                               |                                |                          |                          |
| <b>Operational Stage</b> |                                                                                                                                                                            |                                                                                                                                                                                                                                       |                                |                          |                          |
| Project area development | Failure of STP for wastewater treatment, plantation of non-fruit bearing trees, contamination of water source or agriculture fields due to inadequately treated wastewater | (i) Regular monitoring of treated effluent quality before discharge or reuse for plantation and irrigation purposes<br>(ii) Tree plantation and landscaping in the project area as per approved plan with preference to local species | O&M Contractor                 | Sadarshahar Nagar Palika | Contractor' s O&M cost   |



## H. Conclusion

ADB SPS's requires that project will not be developed in critical habitat area or will not adversely affect the identified critical habitat. The below mentioned criteria should be considered for assessment of impacts on biodiversity, if project development in an identified critical habitat:

- There should be no measurable adverse impacts, or likelihood of such impacts on the critical habitat which could deteriorate its high biodiversity value or the ability to function of ecology of the area.
- The project is not anticipated to lead to a reduction in the population of any recognized endangered or critically endangered species or a loss in area of the habitat concerned such that the persistence of a viable and representative of host ecosystem be compromised.
- Any lesser impacts are mitigated.

This assessment study for Critical Habitat indicates that within the PAI there are no known species which would qualify the area as Critical Habitat for Criterion 1 - 3. Further, within the PAI there are chances that migratory bird species mainly vultures and eagles may utilize the wetland which is at the location of proposed STP location. The presence of birds in area need to be confirmed with local community and divisional forest & wildlife department. However, the PAI does not qualify as Critical Habitat under Criteria 4 and 5.

The implementation of project component is not anticipated to trigger in a population reduction of any recognized endangered or critically endangered species or a loss in area of the habitat for wildlife. The construction activities of the project may lead to some impacts on biodiversity and ecosystem in the area, these impacts can be mitigated with application of measures in design and construction phase.

## I. Recommendation

Following are the recommendations to support and reconfirm the identified potential adverse impacts and suggested mitigation measures for biodiversity due to project implementation:

- i. PIU should conduct consultation before start of work with local community in subproject area and district forest and wildlife department to know presence of IUCN red list species as mentioned in this assessment report.
- ii. Contract a local biodiversity expert to further verify the presence of IUCN red list species in the subproject area.
- iii. On confirmation of enlisted species in the subproject area, same will be reported to PIU and do not start of works on site until clearance from PIU.
- iv. Update Environmental management plan based on findings/verification of IUCN species in the subproject area, and

- v. The finding/presence of IUCN red list species in the subproject area are confirmed in course of construction work, PIU shall stop the work and coordinate with forest department for the translocation of species.

**Appendix 12: Geographical position coordinates of all project sites**

| <b>COMPONENTS</b>                                             | <b>Latitude</b> | <b>Longitude</b> |
|---------------------------------------------------------------|-----------------|------------------|
| STP-1 (3.4 MLD)- Existing STP<br>North campus of Sardarshahar | 28° 26'56.91"N  | 74°28'39.39"E    |
| STP-2 (2.3 MLD)- Existing STP<br>South campus of Sardarshahar | 28° 24'35.13"N  | 74°28'58.18"E    |
| STP3 (1.6 MLD)-Near Ashoke<br>Circle                          | 28°26'38.22"N   | 74°30'35.47"E    |
| SPS-1 near BSNL office                                        | 28°26'31.41"N   | 74°28'45.18"E    |
| SPS-2 on IGNP Land                                            | 28°25'31.18"N   | 74°29'21.90"E    |
| CWR, Pump House, CRMC-1<br>and CCC at PHED campus             | 28°26'46.54"N   | 74°30'41.93"E    |
| CRMC-2 at Fire Station                                        | 28°26'19.77"N   | 74°28'52.15"E    |

## Appendix 13: Sample chance find protocol

### Introduction

Project town being a heritage town, there are possibility of any chance finds (artefacts) recovery during excavations. Contractors working at heritage towns must take additional care not to destroy or damage historic features during excavations. There may be many buried historic features in heritage towns such as – idols, toys, wells, ancient drains, remains of buildings, other walls, grain pits, etc. Every care must be made not to destroy these during excavations.

Excavator drivers need to be instructed to be aware of hitting buried features and that they must be investigated before continuing work. When features are encountered during mechanical excavation, work should stop and the PIU/Consultants engineers must be informed immediately so that they can be inspected at the first opportunity.

When historic features such as walls, brick constructions and other features are encountered during excavation the excavation must be stopped immediately and the PIU/Consultants must be informed immediately.

- 1.1 **Contractors' instruction:** As soon as contractor recovers any chance find during any excavation works for pipe laying, they should immediately inform PIU/Consultant present in town about the chance find recovery. Immediately stop the excavation activity near point of recovery. After PIU/consultants engineers come at site, contractor should follow cleaning and photography in supervision of PIU/Consultant engineers.
- 1.2 **Cleaning** - When a feature/chance find is discovered it must be defined by careful cleaning. Roots must be removed and dirt must be carefully cleaned away. The section or trench base should also be cleaned back for a little distance around the feature.
- 1.3 **Record photography** – When the feature is clean good photography should be taken – vertical and face-on shots and a few general shots of the feature, also showing its position in relation to surrounding features, buildings, etc. The photographed should be catalogued (date, location, direction of shot)
- 1.4 **Drawn record** -When features/chance finds are revealed a drawn record should also be made.
  - a. General location record – measuring its position and orientation within the protected site / in relation to surrounding structures
  - b. Record drawings – detail drawings made in plan and section/profile. The extent (edges) of the feature should be drawn and the level of the existing ground surface

and the top and base of the feature should be recorded. These levels should be marked on the drawings. The drawings should include detail of the construction of the feature. Perspective sketches could also be made if necessary. Explanatory notes can also be put on the drawings.

- 1.5 *Reporting finds*** - When finds are made these should be reported to PIU/Consultants. Photographs and record drawings should be sent.
- 1.6 *Discovery of historic objects*** - When clearance and excavation takes place artifacts and historic objects are sometimes found. These should be recovered and kept in a safe place. The place of discovery should be recorded and each find given a number and tag tied to the find with the same number on it. A list of the finds should be kept (with the find No. And place of discovery and date of discovery recorded).
- 1.7 *PIU/Consultants responsibility***- PIU/Consultants should inform in written to the State Archaeological Department at the earliest with photographs and request to Archaeology Department to visit the site and hand over the chance finds to them.

## **Appendix 14: Salient features of the IGNP canal**

**Indira Gandhi Nahar Project** is an excellent example of courageous fight of man against oddness of nature. Aim of this ambitious project is to irrigate the thirsty desert land of Western Rajasthan with Himalaya's water and provide drinking water to crores of inhabitants of this area.

Origin of this canal is from Harike barrage situated in Punjab. From Harike, 204 Km. long Indira Gandhi Feeder off-takes, which has 170 Km. length in Punjab & Haryana and balance 34 Km. in Rajasthan. This canal enters in Rajasthan at Hanumangarh. From tail of Indira Gandhi Feeder 445 Km. long Indira Gandhi Main Canal starts which passes through Sri Ganganagar and Bikaner districts and ends at Mohangarh in Jaisalmer. The Project has been envisaged for utilization of 7.59 MAF water out of Rajasthan's share in surplus water of Ravi- Beas rivers.

### **Objectives of Project**

- To provide irrigation facilities in desert area to meet the increasing demand of agricultural products.
- To provide water for drinking and industrial uses.
- Drought proofing of the area and improving living conditions.
- To meet the needs of drinking water, fodder etc. for the animal wealth in the region.
- To provide opportunities for employment and overall development of the area.

### **Status of Project**

For administrative convenience, project has been divided in two stages. The 393 Km. long canal portion (Feeder 204, Main canal 189) from Harike barrage to Pugal in Bikaner distt. i.e. up to 620 RD of Main Canal, with its distribution system (excluding Sahwa lift) is called stage-I. Original work of this stage has been completed and major portion of this stage (except Kanwar Sain lift) has been transferred to Water Resources Deptt. for operation and maintenance.

At present, work of stage-II of Indira Gandhi Nahar Project is under progress. The area downstream to RD 620 of Main canal with its distribution system (including Sahwa lift) is in stage-II. Length of main canal in this stage is 256 Km., which extends from Pugal to Mohangarh. Work of Main canal was completed in 1986.

As per project estimate of year 1993 and decisions taken by State Govt. in year 1995 & 1997 total Culturable Command Area (CCA) of project was 19.63 lac hectare (5.53 lac hectare in stage-I + 14.10 lac hectare in stage-II). In view of reduced availability of water for irrigation in project, State Govt. in year 2005 took decision to complete canal construction works in 16.17 lac hectare culturable command area. This area has been opened for irrigation after completion of canal construction works. However CADWM works in lift schemes of Stage –II is remaining, where works for development of pressure irrigation system has been started.

### **Pressure Irrigation system in lift schemes of IGNP Stage-II**

For efficient and optimum use of water available in project, it has been decided to establish sprinkler irrigation system in lift schemes of stage-II. A pilot project of sprinkler irrigation was taken up in 27449 hectare in the year 2007-08, in which all works to be executed by department

has been completed. All Water User Associations (W.U.A.) proposed in this area has been constituted and irrigation with sprinklers has been started in most of the area. To establish sprinkler irrigation system in remaining area of stage-II lift schemes, sanction has been received from Ministry of Water resources, Government of India for inclusion of project costing Rs.1658.81 crores under Command Area Development and Water Management Programme, under which 50% cost will be received as Central assistance. Pressure irrigation works under this project has been started in 3 canals of Ch. Kumbha Ram Lift Scheme and 4 other works has been in Ch. Kumbha Ram Lift, Dr.Karni Singh Lift and Pannalal Barupal lift schemes.

### **SCADA System**

SCADA system has been installed in project for effective control on water regulation and distribution in canals through latest techniques. Quantity of water flowing in Main Canal and other important canals of-taking from main canal is available at main controlling places of project. This is also available on Internet. Extension of this system on some new locations is under process.

### **Benefits**

With completion of most of the construction work as above, IGNP has benefited the state as under-

- Irrigation is being done every year in this area, where, earlier it was very difficult to arrange even drinking water.
- Drinking water from this canal is being supplied to various villages, towns & cities of Bikaner, Jodhpur, Sri Ganganagar, Hanumangarh, Jaisalmer, Jodhpur, Churu, Nagaur and Barmer.
- Water for Power generation is being supplied to various power projects of Suratgarh, Barsingsar, Guda, Ramgarh, Giral, Rajwest etc. and various Industries.
- Elimination of drought conditions.
- Remarkable improvement in socio-economic conditions of the people and increase in all economic activities.
- Rise in ground water table.

*Source :*

<http://water.rajasthan.gov.in/content/water/en/indiragandhinahardepartment/AboutUs.html#>

## Appendix 15: Surface Water Allocation Letter from PHED

 अधिशाषी अभियंता (परियोजना), जन स्वास्थ्य अभियंत्रिकी विभाग, खण्ड-सरदारशहर ।

क्रमांक : 2631-32 दिनांक : 20/12/17

अधिशाषी अभियंता  
यूआईडीएसएसएमटी  
आर.यू.आई.डी.पी.झूझनू।

विषय : आर.यू.आई.डी.पी. चतुर्थ फेज डीपीआर तैयार करने के लिए सावर लिफ्ट कैनल में पानी की मात्रा की उपलब्धता बाबत।  
प्रसंग : आपका पत्रांक 140-142 दिनांक 12.12.2017

विषय एवं प्रसंगान्तरित पत्र के संदर्भ में आप द्वारा सरदारशहर के लिए 2036 व 2051 के लिए पानी की मांग एवं साहवा लिफ्ट पर पानी उपलब्धता की सूचना चाही गई है ।  
उक्त के संबंध में लेख है कि सरदारशहर के लिए धन्नासर हैड वर्क्स पर वर्ष 2041 तक कुल मांग 43 एम.एल.डी. तक पानी निम्नानुसार मापदण्डों के अनुसार उपलब्ध होगा।

1. शहरी क्षेत्र सरदारशहर के लिए 16 एम.एल.डी. 100 एलपीसीडी अनुसार।
2. ग्रामीण क्षेत्र सरदारशहर के लिए 27 एम.एल.डी. 55 एलपीसीडी अनुसार।

श्रीमान् अतिरिक्त मुख्य अभियंता (परियोजना), जन स्वा.अभि.विभाग, धूरु द्वारा सरदारशहर के लिए प्रथम फेज के समस्त कार्यों का सर्वे एवं डीपीआर बनाने का कार्यदेश नो 0 पीडीकोर लिमिटेड, जयपुर को दिया हुआ है जिसमें सरदारशहर कस्बे की मांग भी है ~~समाहित है।~~

(समदेवाल मोणा)  
अधिशाषी अभियंता (परियोजना)  
जन स्वा.अभि.विभाग, खण्ड-सरदारशहर  
दिनांक : 20/12/17

क्रमांक : 2631-32  
प्रतिलिपि :  
1. श्रीमान् अधीक्षण अभियंता, जन स्वा.अभि.विभाग, धूरु

(समदेवाल मोणा)  
अधिशाषी अभियंता (परियोजना)  
जन स्वा.अभि.विभाग, खण्ड-सरदारशहर



**A copy of letter transcript in English**

**To,**

**Executive Engineer**

**UIDSSMT**

**RUIDP, Jhunjhunu.**

**Subject:** Availability of quantity of water in Sewer lift canal for preparation of RUIDP PH-IV DPR.

**Reference:** Your letter 140 - 142 dated 12.12.2017

In the context of the subject and subject letter, you have asked for information on water demand for Sardarshahar for 2036 and 2051 and water availability on Sahwa lifts.

In relation to the above, the demand is that the total demand on Dhanlasar Head Works for Sardarshahar by the year 2041 is 43 MLD water shall be available as per the following criteria.

1. 16 MLD for urban area Sardarshahar as per 100 LPCD
2. 27 MLD For rural area Sardarshahar as per 55 LPCD.

Mr. Additional Chief Engineer (Project), PHED Churu, directed M/s PDCOR, Ltd., Jaipur for survey and to prepare first phase DPR for all the work in which Sardarshahar demand is also included.

Ram Dayal Meena

Executive Engineer

Copy to:

1. SE PHED, Churu

Ram Dayal Meena

Executive Engineer

### Appendix 16: Feasibility report of tube wells

GOVERNMENT OF RAJASTHNA  
GROUND WATER DEPARTMENT, CHURU  
FEASIBILITY REPORT FOR SOURCE:- HANDPUMP/TUBEWELLS/DCB (200 mm Dia)

| Sr. No. | Name of Village/Town | Block       | Location of Source | Expected Water Level in mtr. | Casing Recommended in mtr. With Size | Depth Recommended in mtr. | Expected Discharge in gph. | Hydrogeological Formation | Type of Well Recommended | Remarks, If Any |
|---------|----------------------|-------------|--------------------|------------------------------|--------------------------------------|---------------------------|----------------------------|---------------------------|--------------------------|-----------------|
| 1.      | Kamasar              | Sardarshahr | Village Area       | 40-45                        | 150-175                              | 150-175                   | 1500-2000                  | Older Alluvium            | Rotary                   |                 |
| 2.      | Sajnsar              | Sardarshahr | Village Area       | 40-45                        | 150-175                              | 150-175                   | 1500-2000                  | Jodhpur Sandstone         | Rotary                   |                 |
| 3.      | Swai Blawania        | Sardarshahr | Village Area       | 60-65                        | 150-175                              | 200-250                   | 1500-2000                  | Jodhpur Sandstone         | DTH                      |                 |
| 4.      | Bhojusr Upadhiya     | Sardarshahr | Village Area       | 70-75                        | 150-175                              | 200-250                   | 2000-2500                  | Jodhpur Sandstone         | DTH                      |                 |
| 5.      | Panpaliya            | Sardarshahr | Village Area       | 70-75                        | 150-175                              | 200-250                   | 2000-2500                  | Older Alluvium            | Rotary                   |                 |
| 6.      | Bhojasar Chhota      | Sardarshahr | Village Area       | 60-65                        | 150-175                              | 150-175                   | 1500-2000                  | Older Alluvium            | Rotary                   |                 |
| 7.      | Rolasar              | Sardarshahr | Village Area       | 60-65                        | 150-175                              | 150-175                   | 1500-2000                  | Older Alluvium            | Rotary                   |                 |
| 8.      | Bhojrasar            | Sardarshahr | Village Area       | 60-65                        | 150-175                              | 150-175                   | 1500-2000                  | Older Alluvium            | Rotary                   |                 |
| 9.      | Naiyasar             | Sardarshahr | Village Area       | 60-65                        | 150-175                              | 150-175                   | 1500-2000                  | Older Alluvium            | Rotary                   |                 |
| 10.     | Rangaisar            | Sardarshahr | Village Area       | 60-65                        | 150-175                              | 150-175                   | 1500-2000                  | Older Alluvium            | Rotary                   |                 |
| 11.     | Rajasar Chhodiya     | Sardarshahr | Village Area       | 60-65                        | 150-175                              | 150-175                   | 1500-2000                  | Older Alluvium            | Rotary                   |                 |
| 12.     | Patlisar Chhota      | Sardarshahr | Village Area       | 70-80                        | 150-175                              | 200-250                   | 1500-2000                  | Nagaur sandstone          | DTH                      |                 |

|     |                           |                 |              |       |         |         |           |                      |        |  |
|-----|---------------------------|-----------------|--------------|-------|---------|---------|-----------|----------------------|--------|--|
| 13. | Rajesar<br>Bikan          | Sardarsh<br>ahr | Village Area | 60-65 | 100-150 | 100-150 | 2000-2500 | Younger<br>Alluvium  | Rotary |  |
| 14. | Swai<br>Sanwal            | Sardarsh<br>ahr | Village Area | 60-70 | 150-200 | 200-250 | 2000-2500 | Jodhpur<br>Sandstone | DTH    |  |
| 15. | Bilyuwas<br>Rampura       | Sardarsh<br>ahr | Village Area | 60-65 | 150-200 | 200-250 | 1500-2000 | Jodhpur<br>Sandstone | DTH    |  |
| 16. | Hriyasar<br>Ghrsotan      | Sardarsh<br>ahr | Village Area | 45-50 | 150-200 | 150-200 | 1500-2000 | Jodhpur<br>Sandstone | DTH    |  |
| 17. | Ruplisar                  | Sardarsh<br>ahr | Village Area | 70-80 | 150-200 | 150-200 | 1500-2000 | Jodhpur<br>Sandstone | DTH    |  |
| 18. | Mehri<br>Purohitan        | Sardarsh<br>ahr | Village Area | 50-60 | 100-150 | 100-150 | 1500-2000 | Jodhpur<br>Sandstone | DTH    |  |
| 19. | Mehrasar<br>Chachera      | Sardarsh<br>ahr | Village Area | 45-50 | 100-150 | 100-150 | 1500-2000 | Older<br>Alluvium    | Rotary |  |
| 20. | Udasar<br>Bidawtan        | Sardarsh<br>ahr | Village Area | 50-60 | 150-200 | 100-150 | 1500-2000 | Older<br>Alluvium    | Rotary |  |
| 21. | Pulasar                   | Sardarsh<br>ahr | Village Area | 45-50 | 100-150 | 100-150 | 1500-2000 | Older<br>Alluvium    | Rotary |  |
| 22. | Sardarshah<br>r City Area | Sardarsh<br>ahr | Village Area | 45-50 | 100-150 | 100-150 | 1500-2000 | Older<br>Alluvium    | Rotary |  |

No.-

41.

Date:- 03.06.2019.

Copy to-1 Distt. Collector, Churu.

2. Executiving Engineer, PHED Div. Churu.

Incharge Hydrogeologist

(लक्ष्मण सिंह राठौड़)


प्रभारी भू-जल वैज्ञानिक

(सर्वेक्षण एवं अनुसंधान)

भू-जल विभाग, चूरु (राज.)

प्लॉट नं० 10723

### Appendix 17: Location details of tube wells

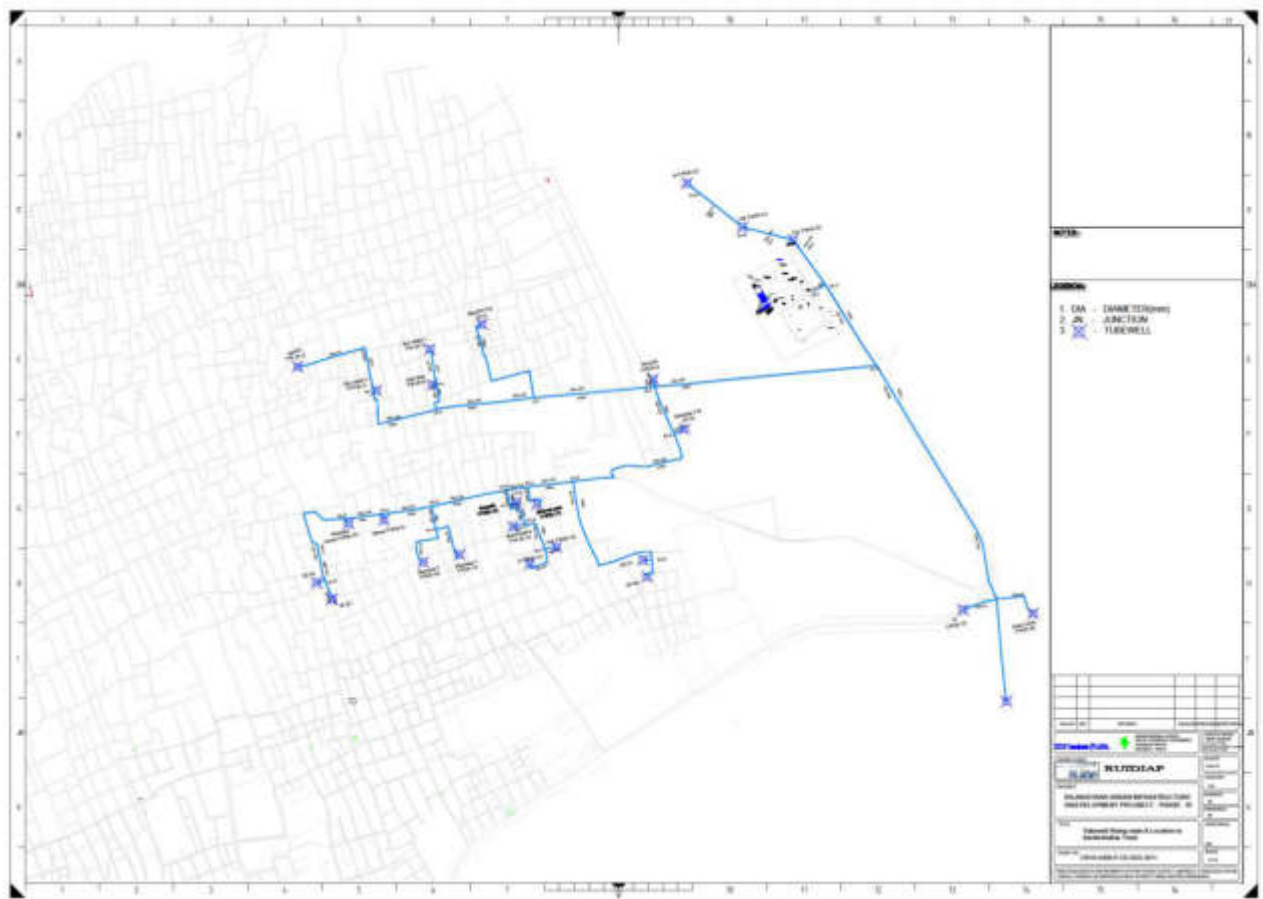

## Appendix 18: Excerpts on reuse from Rajasthan state Sewerage and Wastewater Policy

---

### STATE SEWERAGE AND WASTE WATER POLICY- 2016

---

- viii. Design and performance specifications of wastewater treatment plants shall be as per guidelines given in the manual on sewerage treatment systems published by CPHEEO. Sufficient room in tendering for the construction of new plants shall be provided for competition to take place in both technologies and costs.

#### 5.4. On Reuse of Treated Effluent and Sludge

1. Treated wastewater effluent is considered a water resource and is added to the water stock for reuse.
2. Priority shall be given to agricultural reuse of treated effluent for unrestricted irrigation. Blending of treated wastewater with fresh water shall be made to improve quality where possible. Crops to be irrigated by the treated effluent or blend thereof with freshwater resources shall be selected to suit the irrigation water, soil type and chemistry, and the economics of the reuse operations.
3. Crop nutrient requirements shall be determined taking into consideration the prevailing effluent quality. Overuse of nutrients shall be avoided.
4. Accumulation of heavy metals and salinity shall be monitored, managed and mitigated. Leaching of soils shall be advocated by the irrigation authorities.
5. Farmers shall be encouraged to determine the rate of water application needed for different crops, taking into consideration the value of nutrients in the treated water and other parameters.
6. Farmers shall be encouraged to use modern and efficient irrigation technologies. Protection of on-farm workers and of crops against pollution with wastewater shall be ensured.
7. Treated effluent quality should be monitored and users alerted to any emergency causing deterioration of the quality so that they will not use such water unless corrective measures are taken.
8. Studies should be conducted and projects designed and implemented to store the excess treated wastewater in surface reservoirs but artificial recharge is not permitted. Due attention shall be given to the quality of treated and groundwater and the characteristics of the strata.
9. Plans and studies for power generation from sludge, if proven technically, economically and financially feasible, shall be made with due attention to environment impacts.
10. Sludge produced from the treatment process would be processed so it may be used as fertilizer and soil conditioner. Care shall be taken to conform to the regulations of public health and environment protection norms.

11. **Industry:** Industrial reuse of reclaimed wastewater represents major reuse next only to irrigation in both developed and developing countries. Reclaimed wastewater is ideal for many industrial purposes,. Where effluent is to be used in the industrial processes, it should be the responsibility of the industry to treat it to the quality standards required. Pilot scale feasibility studies carried out in Australia have concluded that it is possible to economically treat the domestic wastewater to achieve adequate quality for reuse as cooling water. Based on the conclusions of the feasibility study, a full-scale treatment plant employing cross-flow membrane microfiltration system may be installed. The membrane filtration system can remove all suspended solids, fecal coliforms, and giardia cysts. It could also significantly reduce human enteric viruses such as *reovirus* and *enterovirus*. The water reclamation plant at Eraring Power Station demonstrates the potential for reuse of wastewater in power generation and other industrial manufacturing facilities.

Industrial uses for reclaimed water include:

- (i) Evaporative cooling water:-
  - (a) Once-through cooling system.
  - (b) Re-circulating cooling system.
  - (c) Cooling water quality requirements.
- (ii) Boiler –Feed water- The use of reclaimed water differs little from use of conventional public supplies for boiler-feed water, as both require extensive additional treatment quality requirement for boiler feed make up water are dependent upon pressure at which boiler is operated.

- (iii) Industrial process water-

Suitability of reclaimed water for use in industrial process depends upon particular use like-

- (a) Pulp and paper.
  - (b) Chemical industry.
  - (c) Textile industry.
  - (d) Petroleum and coal.
12. Whenever possible, other end uses of treated effluents; such as recycling, cooling, power generation, etc. shall be considered.
13. **Re-use Options:** The following options for re-use of effluent have been identified: In general, public health concern is the major issue in any type of reuse of wastewater, be it for irrigation or non-irrigation utilization, especially long term impact of reuse practices. It is difficult to delineate acceptable health risks and is a matter that is still hotly debated. Potential reuse of wastewater depends on the hydraulic and biochemical characteristics of wastewater, which determine the methods and degree of treatment required. While agricultural irrigation reuses, in general, require lower quality levels of treatment, domestic reuse options (direct or indirect potable and non-potable) reuses need the highest treatment level. Level of treatment for other

reuse options lie between these two extremes. The reuse options may be (artificial recharge of aquifers is not permitted):

- i. Irrigation
  - (a) Agriculture and forestry
  - (b) Landscaping
- ii. Fish – farming
- iii. Industry
- iv. Non-potable Domestic Reuse.

The detailed project report should clearly define the best reuse option particular to town and strategy to obtain it. Action plan with clarity should be the part of Detailed Project Report (DPR), while preparing sewerage projects. Before deciding the reuse of treated waste water, authorities must full fill the water quality norms and its legal implications.

14. Governing local body can sell the treated waste water and digested sludge to generate the revenue.

#### **5.5. On Pricing, Financing and Investment**

1. In view of increasing marginal cost of wastewater collection and treatment, wastewater charges, connection fees, sewerage taxes and treatment fees shall be set to cover at least the operation and maintenance costs. It is also highly desirable that part of the capital cost of the services shall be recovered. The ultimate aim is for a full cost recovery.
2. Appropriate criteria in order to apply the "polluter pays" principle shall be established.
3. Different charges for different areas may be applied. This shall be assessed for each geographical area as a function of end users and effluent quality and will be subject to economic and social considerations.
4. Because of the limited financial resources available to Government of Rajasthan, setting investment priorities in wastewater will be compatible with government investment plans.
5. Criteria for prioritizing investments in the wastewater sector shall take into account the current and future needs of the state, needs to expand wastewater systems in urban areas and to provide wastewater systems to smaller towns and villages.
6. Priorities of wastewater projects shall not be disconnected from water supply projects and urbanization in general. Decisions will be made concerning them to attain optimum solutions to the need for services, availability of finance and availability of trained manpower.

## **Appendix 19: Guidelines for Sewerage System Operations, Reuse of Treated Effluent and Sludge from STP for Beneficial Purposes**

(Source: Manual on Sewerage and Sewage Treatment Systems, CPHEEO, Ministry of Urban Development, Govt. of India)

### **Health Hazards during Sewage Operations**

Labourers working on the sewage treatment and operations may suffer from a number of ailments directly attributed to handling of sewage. In view of this it is desirable to disinfect sewage and where feasible mechanize sewage operations.

The staff of sewage operations must be well educated in the sanitary rules on the utilization of sewage for irrigation as well as with personal hygiene. All persons working in sewage farms must undergo preventive vaccination against enteric infections and annual medical examination for helminthiasis and be provided treatment if necessary.

Sewage treatment plants should be provided with adequate space for canteens with proper sanitation, wash-stands and lockers for irrigation implements and protective clothing. Safe drinking water must be provided for the workers and for population residing within the effective range of the sewage treatment plants.

All workers should be provided with gum boots and rubber gloves, which must compulsorily be worn while at work. They should be forced to observe personal hygiene such as washing after work as well as washing before taking food. The use of antiseptics in the water used for washing should be emphasized. The farm worker should be examined medically at regular intervals and necessary curative measures enforced.

### **Mitigation measures to avoid Health Hazards**

#### **Personal Hygiene against Pathogen**

The worker should take precautions because a large number of coliform groups, various kinds of micro-organisms, and egg parasites exist in sewage. The workers should strive to maintain good health by taking care of the following points:

- Wear clean uniform, work boots, etc.
- After work and before having a meal, always wash hands and disinfect them.
- After work, take a shower if possible.
- Do not enter the offices and lounges wearing dirty clothes.
- If necessary, take vaccinations against tetanus, leptospirosis fever and so on

**Maintaining Cleanliness** The worker should maintain each facility in a clean and neat condition.

- The floors of workrooms, stairs and corridors should be cleaned at the appropriate frequency to maintain them in a clean condition
- Disinfection of relevant locations is to be carried out periodically.



**Health Check** Workers should receive health check once a year to maintain their health, and prevent illnesses or detect them at an early stage. The results of the health check should be maintained as records. Recommended items to be inspected during the health check are as given below.

- Examine medical history.
- Examine subjective symptoms and other objective symptoms.
- Check height, weight, vision and hearing ability.
- Chest X-ray examination.
- Blood pressure measurement.
- Check for anaemia.
- Check for liver functions.
- Check for lipids in blood.
- Check blood sugar level
- Urine analysis.
- Electrocardiogram analysis

**Welfare Measures** The Sanitation Workers (Regulation of Employment and Conditions of Service) Act 2012 proposes constitution of a Sanitation Workers State Welfare Board to exercise powers conferred on it and to perform welfare functions such as the following for sanitation workers:

- Provide immediate assistance to a beneficiary in case of an accident
- Sanction of loan and advances
- Medical expenses for treatment of major ailments
- Financial assistance for education of children
- Payment of maternity benefits
- Make provision and improvement of welfare measures and facilities as may be prescribed

**Corrective Measures** When a worker has symptoms of an illness listed above, the plant engineer should ensure that the worker is checked-up by a specialist doctor and receives proper treatment and care and should take the following actions considering the content of work done by the worker:

- Change the workplace if necessary
- Change the content of the work
- Shorten the working hours
- Perform relevant measurements of the working environment
- Maintain the facility or equipment

### **Risks in use of treated effluent and sludge in agriculture practices**

Cultivation of crops that are eaten raw should be banned. Cultivation of paddy in bunded fields is likely to give rise to sanitation problems and hence is undesirable. Growing of non-edible commercial crops like cotton, jute, fodder, milling varieties of sugarcane and tobacco would be suitable. Cultivation of grasses and fodder legumes, medicinal and essential oil yielding plants

like menthol and citronella may be allowed. Cultivation of cereals, pulses, potatoes and other crops that are cooked before consumption may be permitted, if sewage is treated and care is taken in handling the harvests to ensure that they are not contaminated. Cultivation of crop exclusively under seed multiplication programmes would be advantageous as these are not consumed. As an additional safeguard, sewage irrigation should be discontinued at least two months in advance of harvesting of fruits and berries, one month for all kinds of vegetables and a fortnight for all other crops. Direct grazing on sewage irrigated farms should be prohibited.

### **Risks of Nutrient Loading in Agriculture**

Crops receiving excessive dosage of nitrogen show superfluous vegetative growth and decrease in grain or fruit yield. The phosphate deficit of sewage, therefore, should be made good by supplementing with phosphate fertilizers, the extent of phosphate fortification depending upon the nature of crop and its phosphate requirements. As the availability of phosphate is low in the irrigation water it would be desirable to apply the required quantity of phosphatic fertilizer at the time or even (about a fortnight) before the sowing or planting of the crop. Even when sewage nutrients are balanced by fortification, irrigation with such sewage may supply excessive amount of nutrients resulting in waste or unbalanced growth of plants with adverse effects on yields. It may therefore be necessary to dilute the sewage. Dilution also helps in reducing the concentration of dissolved salts and decomposable organic matter in the sewage thus, decreasing hazards to the fertility of the soil. It is desirable to limit the BOD and total suspended solids of sewage to be disposed on land for irrigation, as per relevant standards. There is a need to take caution on describing nutrient supply capacity of sewage particularly in the case of availability of phosphorus because there is a possible conversion of available phosphorus in unavailable mode in the presence of heavy metals present in the sewerage. This happens commonly in high as well as low pH soils.

### **Alternative Arrangement during Non-irrigating Periods**

During rainy and non-irrigating seasons, agricultural practices may not need any water for irrigation. Even during irrigating season, the water requirement fluctuates significantly. Hence, satisfactory alternative arrangements have to be made for the disposal of sewage on such occasions either by storing the excess sewage or discharging it elsewhere without creating environmental hazards. The following alternatives are generally considered: a) Provision of holding lagoons for off-season storage. They enable irrigation of a fixed area of land to varying rates of crop demand. They may also serve as treatment units such as aerated or stabilization lagoons, provided the minimum volume required for treatment is provided beyond the flow-balancing requirement. b) Provision of additional land where treated sewage is not required on the main plot of land c) Discharge of surplus treated sewage to river or into sea with or without additional treatment. Combining surface discharge facilities with irrigation system is quite common and often quite compatible. d) Resorting to artificial recharge in combination with an irrigation system where feasible.

### **Treated Sewage into Perennial Rivers**

When sewage is treated and discharged into perennial flowing rivers and the blended river water is drawn downstream of the point of such blending as raw water for treatment in public water supply schemes. This is indirect potable use after blending. This is historical and ongoing all around. However, of late, the organic load due to the discharged treated, partially treated and non-point sewage becomes in excess of the self-purifying capacity of the river. Thus, the river water is not actually fresh water. The water quality of Yamuna river for Agra water supply scheme requires to be first treated in MBBR to purify the river water to a level as raw water for the downstream WTP. When it passes through flowing surface water it has the potential disadvantages of contamination by human and animal activities adding organic matter and waterborne pathogens unless the river stretch is protected from such activities. The guiding principle in such cases for the ULBs will be to at least intercept the sewage outfalls and provide adequate STPs and follow the recommended quality criteria for the treated sewage.

### **Treated Sewage into Non-Perennial / Dry River Courses**

There are locations where the rivers are not perennial or almost dry throughout the year except some monsoon runoff. In this case the discharged treated sewage sinks into the aquifer zone and is extracted by infiltration wells or galleries. The advantage of direct dilution from surface water is lost, but the additional purification in the soil and dilution from the aquifer water are happening. An example is the case of the Palar river course in Tamilnadu. The surface water flow in this occurs only for about a week if the monsoon is normal and if the water spills beyond the upstream impoundments. The aquifer however supports the public water supply of over 30 habitations along its dry tract of nearly 80 km before the sea. The partly treated sewage of the en-route habitations does reach this river course as intervals. So far, no epidemics have been met with. This may be due to the above said additional purification in the soil and dilution by aquifer water. However, if these are exceeded by the contamination load, there can be immediate health problems. The guiding principle in such cases for the ULBs will be (a) to keep a check on the raw water quality from the infiltration wells to detect sudden increase in contaminants and (b) at least intercept the sewage outfalls and provide adequate STPs.

## Appendix 20: Preliminary audit note on existing facilities

1. Name of Plant : Existing Sewage Treatment Plant for Sarsahar Town (North & South)
2. Capacity : 2 MLD & 5 MLD
3. Technology : Waste Stabilisation Pond (WSP)
4. Executing agency : UIDSSMT
5. Implementing agency : RUDSICO-EAP
6. Project name under which this STP was constructed: UIDSSMT/SARD/WW/01/lot-2
7. Name of contractor : M/s GSJ Arvind Ltd
8. Date of start of the construction of STP: 09.01. 2017
9. Status of work progress of STP: (completed/uncompleted components with %) : completed on 31.05.2018

10. Sewerage networks laid under the project (type, dia and length):

| S. No.       | Dia in mm | Length in m     |
|--------------|-----------|-----------------|
| 1            | 150       | 137995.00       |
| 2            | 200       | 5086.50         |
| 3            | 250       | 2989.50         |
| 4            | 300       | 2112.50         |
| 5            | 350       | 1614.00         |
| 6            | 400       | 632.50          |
| 7            | 450       | 2558.00         |
| 8            | 500       | 49.00           |
| 9            | 600       | 1239.50         |
| 10           | 700       | 266.00          |
| 11           | 800       | 422.50          |
| 12           | 900       | 212.00          |
| 13           | 1000      | 783.50          |
| <b>Total</b> |           | <b>155960.5</b> |

11. Nos., locations and capacities of SPS:

| Sr.No. | Location          | Name of SPS | Supplying to                           | Capacity (LPS) |
|--------|-------------------|-------------|----------------------------------------|----------------|
| 1.     | Near Lohar Colony | SPS 2       | Trunk Sewer<br>Supplying to SPS<br>-01 | 18.05          |
|        |                   |             |                                        | 18.05          |
|        |                   |             |                                        | 21.00          |
|        |                   |             |                                        | 52.00          |
| 2.     | At Ward-05        | SPS 4       | Trunk Sewer<br>Supplying to SPS<br>-10 | 259.84         |
|        |                   |             |                                        | 115.48         |
|        |                   |             |                                        | 57.74          |
|        |                   |             |                                        | 57.74          |
| 3.     | At Ward-01        | SPS 1       | STP 2 (2MLD)                           | 17.80          |
|        |                   |             |                                        | 17.80          |

|    |                       |        |               |        |
|----|-----------------------|--------|---------------|--------|
|    |                       |        |               | 35.86  |
|    |                       |        |               | 89.58  |
| 4. | Near Railway Crossing | SPS 10 | STP 1 (5 MLD) | 313.31 |

12. Cumulative Progress % (including STP/SPs/Network): 100% ( Hand over to Nagar Palika on dated 23.06.2018)
13. Areas of different units of plant (sq. m): 60940 Sqm Considering Two STP's
14. Total Area of land used for STP: 50 Bighas
15. Land ownership details: (khasra nos.): Gaushala Samiti, Sardarshahar
16. Estimated/Final cost of STP: Rs 7.10 Cr.
17. O&M period of contract: 05years
18. Tree plantations done under this project (nos. and types of trees): 25 nos at 2 MLD Plant & 25 nos at 5 MLD
19. Date of completion of construction works of STP: 31.05.2018 ( Hand over to Nagar Palika on dated 23.06.2018)
20. Reasons of delay, if any: Due to design and drawings approval
21. Status of Consent to Establish (CTE) from Pollution Control Board: obtained
22. Validity of CTE: 2014
23. Status of Consent to Operate (CTO) from Pollution Control Board: obtained/not obtained- in process
24. Validity of CTO:
25. Status of sewerage networks: Completed.
26. Total area of city covered with this STP: 5 Sq km
27. Details of total covered area with this STP: (ward nos.) Ward No 4 to 8, 11, 16, 17, 20 to 27, 31, 33 to 35.
28. Total Population covered (number and %): 65,000 (approx.)
29. Whether trail run completed, if yes give date, if no give tentative date: Yes (
30. Estimated date of commissioning of this STP: 2018
31. What are the parameters of discharge of treated effluent: BOD <100mg/l, COD<250mg/l, SS<100mg/l

32. What are the proposals/methods for reuse/disposal of treated effluent from STP: Under the current scheme there is a proposal for the construction of a Underground Tank, Pump House, Overhead Tank, along with 100m DI (K-7) pipe for recycling of treated effluent of STP. The treated effluent will be used by Gaushala Samriti.
33. What are the proposals/methods for reuse/disposal of treated sludge from STP: same as above
34. Is this plant anywhere related/dependent on proposed STP under RUDSICO-EAP project: Yes
35. Status and type of electricity connection: (connection number and approved load, KW)- 02 nos connection at STP and 04 nos. connections at SPS
36. Whether DG set installed, if yes give capacity and type of DG set: Yes - 02 nos. 40KVA at STP and 02 nos 125 KVA at SPS & 60 KVA at another 02 SPS
37. Whether consent from Pollution Control Board taken for DG set: Yes
38. Fresh water requirements/day (for domestic use) and type of water supply: 25.2MLD for Sardarshahar Town
39. If tube well installed, provide number and capacity of tube well and status of clearance from Ground Water Board for tube well: 48 Nos, Total Capacity of Tube Well 5.5MLD
40. Numbers of employees proposed for operation of plant (designation wise numbers of employees): 10 Nos
41. Is rain water harvesting system established, if yes, provide details, drawing and cost of rain water harvesting : No
42. Power generation system installed, if yes, give details: No
43. O&M manual prepared by contractor (submitted/approved):
44. Emergency operating system prepared for O&M:
45. Whether provisions for odour control taken in design, if yes give details:
46. If provisions taken to protect inconvenience to nearby habitants, give details:

### Photographs of Existing Facilities




WSP (STP-South)

STP South



WSP (STP-North)

STP-North

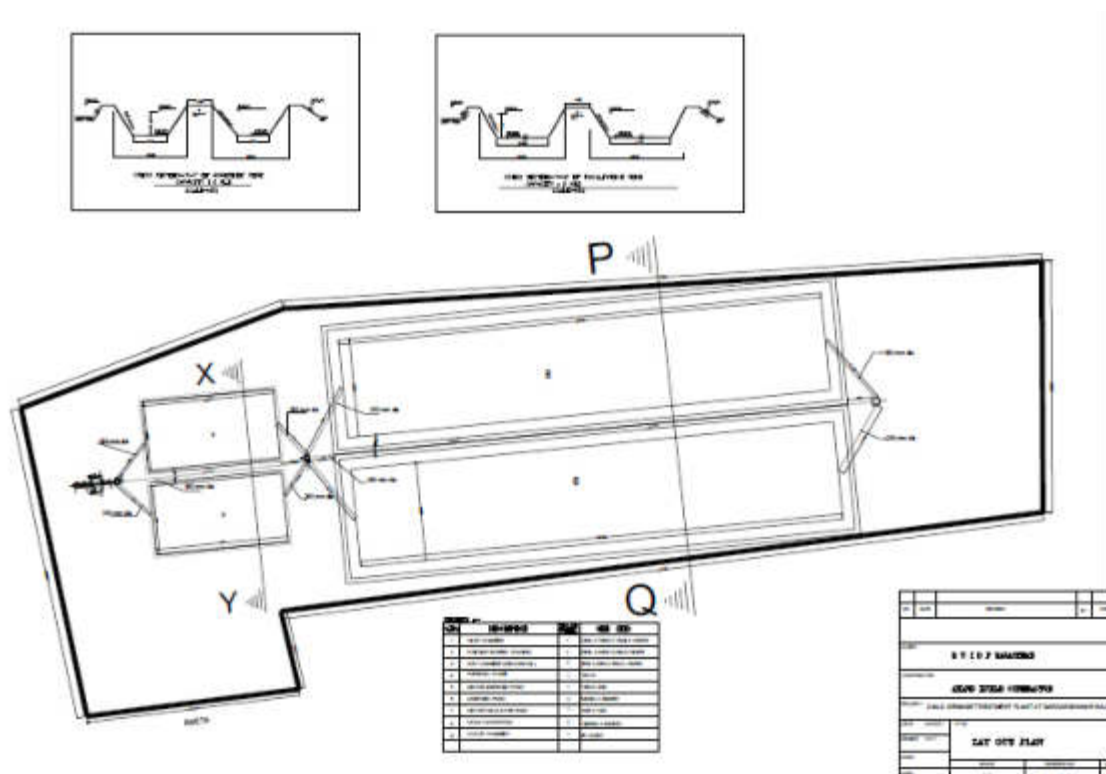

Layout of 05 MLD STP (Existing) – South



## AUDIT REPORT OF EXISTING WATER SUPPLY SYSTEM

Source: DPR

### 5.1. Existing System of intermediate Pumping station at Sadasar & Pallu:

#### 5.1.1 intermediate Pumping station at Sadasar&Pallu (Electrical System):

- 1) **PALOO intermediate Pumping station:**
  - 3 (2+1) Transformers of 1250 kva each are available.
  - All isolators are manual
  - Outdoor VCBs are non SCADA Compatible
  - Outdoor CT-PT are under maintenance
  - LT panel relays are not in working condition.
  - Instruments/Gantry in AIS Switchyard are not properly installed.



AIS switchyard at  
PALOO



LT Panel at Pallu



Transformer at Pallu

### 5.1.2 SADASAR intermediate Pumping station

- 3 (2+1) Transformer of 1250 kva each are available.
- All isolators are manual.
- Outdoor VCBs are non SCADA Compatible.
- Outdoor CT-PT are under maintenance.
- LT panel relays are not in working condition.
- Instruments/Gantry in AIS Switchyard are not properly installed.



AIS at SADASAR



Transformer at SADASAR



LT Panel at SADASAR

#### 5.1.2 Intermediate Pumping station at Sadasar & Pallu (Mechanical System):

Water is pumped to Sardarsaahr along with villages from these intermediate pumping stations. These pumping stations are maintained by PHED but it is not considered in the scope of this project.

**Table 5.1-Existing Pumps at Pallu& Sadasar Intermediate Pumping Station**

| Name of HWCWR  | Supplying to | Head (M) | Motor (KW/HP) | Flow (m <sup>3</sup> /hr) | No. of Pumps |
|----------------|--------------|----------|---------------|---------------------------|--------------|
| 1. Palloo CWR  | Sadasar CWR  | 36.40    | 280           | 1100                      | 6(3W+3S)     |
| 2. Sadasar CWR | Sardarshahar | 36.30    | 280           | 1013                      | 6(3W+3S)     |

## 5.2. Existing pump house for distribution system in Sardarsahar

There are total 2 pump houses in Sardarshakar town for distribution system in Sardarsahar. Condition assessment of each pump house including its civil and electro-mechanical work has been done by physical inspection and to find out visible defects and size.

### 5.2.1 Existing System at Clear Water Pumping station at Hanumangarh Road (Electrical System) -

- 2(1+1) Transformers of 1000 kva each are available and one bay are vacant.
- All isolators are manual
- Outdoor VCBs are non SCADA Compatible
- Outdoor CT-PT are under maintenance
- Instruments/Gantry in AIS Switchyard are not properly installed.
- LT panel are under maintenance.
- The capacity of DG are sufficient
- to cater full load of OLD CWPB transformer.



DG SET at OLD CWPB



Existing Transformer





AIS Switch yard at OLD CWPH



LT Panel at Old CWPH

### **5.2.2 Existing System at Clear Water Pumping station (SCADA System) -**

There is no SCADA system present in the existing clear water pumping station at Hanumangarh Road.

### **5.2.3 Existing System at Clear Water Pumping station (Mechanical System) -**

All existing pumps have served their useful lives at very low efficiency. Refurbishing them under the present condition will be uneconomical. Further duty of these pumps will not suit the revised zonal demand of the sardarshahar. Hence these pumps are recommended to be phased out. The piping system and all the valves need to change as the proposed system will be SCADA based. All the existing valves are manually operated which need to be replaced.

**Table 5.2** : Existing Pumping system at Clear Water Pumping staion ,Hanumangarh Road

| Name of HW/CWR | Supplying to    | Head (M) | Motor (KW/HP) | Flow (m3/hr) | No. of Pumps | Year of installation |
|----------------|-----------------|----------|---------------|--------------|--------------|----------------------|
| 1.CWR          | Bhairudera      | 44       | 55/75         | 262          | 2(1W+1S)     | 2006                 |
|                | Ramnagar        | 54       | 55/75         | 214          | 2(1W+1S)     |                      |
|                | Suryamandir     | 49       | 45/60         | 202          | 2(1W+1S)     |                      |
|                | Holidhora       | 46       | 18.5/25       | 70           | 2(1W+1S)     |                      |
| 2. Zone 6 GLSR | Ward 18,17(1/2) | 40       | 25            | 1.25         | 2(1W+1S)     | 2006                 |

Apart from above pumps, there are 16 more pumps installed in this pumping station which are supplying water in the nearby villages which is beyond municipal boundary of Sardarsahar hence there pumps are not included in scope of this project.



Clear water pumps at  
CWPS



Clear Water pumps at  
Zone -6 pumping station

#### 5.2.4 Existing System at Clear Water Pumping station (STRUCTURE) -

This consists of CWR of 4100 KL along with pumping station. This CWR consist of two partitions. This CWR consist of one pumping station for Sardarsahar town and adjoining areas. There is one new CWR of capacity 5200 KL is under construction in the same premises.

|                                                                                      |                                                    |
|--------------------------------------------------------------------------------------|----------------------------------------------------|
|    | Clear water reservoir                              |
|   |                                                    |
|  | Clear water Pumping station<br>at Hanumangarh road |



Clear water Pumping station  
at Hanumangarh road.

### 5.3. Existing storage reservoirs-STRUCTURAL (OHSR & GLSR)

There are 6 OHSR & 1GLSR in Sardarsahar, with a total storage capacity of 6.2 ML. During consultant's visit to the site, consultant could not physically access OHSR from inside due to tank full with water & continuous use in water supply distribution. Conditional assessment of all the reservoirs was done from outside. In absence of physical inspection of aforesaid structures from inside we adopt 50% of inner surface area to be rehabilitated considering the nonstop water supply. The storage capacities and year of construction of OHSR's are listed below with remarks of existing condition. Physical assessments of aforesaid structures are as follows.

**Table 5.3 Existing GLSR Status**

| S. no. | Location Of OHSR/ GLSR | Capacity of OHSR / GLSR(In KL) | Staging | Year of Construction | Remarks                |
|--------|------------------------|--------------------------------|---------|----------------------|------------------------|
| 1.     | Zone 6 GLSR            | 500                            | -       | 2000                 | To be abandoned        |
| 2.     | BhairuderaOHSR         | 1500                           | 18      | 2006                 | Required strengthening |
| 3.     | HolideraOHSR           | 500                            | 18      | 2006                 | Required strengthening |
| 4.     | RamnagarOHSR           | 1500                           | 18      | 2012                 | Required strengthening |
| 5.     | SuryamandirOHSR        | 1500                           | 18      | 2007-08              | Required strengthening |
| 6.     | Zone 5 OHSR            | 350                            | 18      | 2012                 | Hydro test is required |
| 7.     | Zone 6 OHSR            | 350                            | 18      | 2012                 | Hydro test is required |

**5.3.1 Holi DhoraOHSR:** This OHSR was constructed in 2006. This OHSR is continuously supplying water hence condition of reservoir could not assessed from inside.



|                                                                                     |                                                                                                    |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
|    | <p>OHSR photo</p>                                                                                  |
|   | <p>Spots of leakage on the conical dome.</p>                                                       |
|  | <p>No site development works like plinth protection , no proper gate at staircase of OHSR etc.</p> |

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
|   |                          |
|  | Improper washout of OHSR |

**5.3.2 Zone 5 OHSR:** This OHSR is constructed in 2012 but is not in use currently. Hence it is proposed to do hydro testing before using this OHSR.

|                                                                                      |  |
|--------------------------------------------------------------------------------------|--|
|  |  |
|--------------------------------------------------------------------------------------|--|

|                                                                                     |                                     |
|-------------------------------------------------------------------------------------|-------------------------------------|
|   | <p>No boundary wall around OHSR</p> |
|  | <p>Washout not connected.</p>       |

**5.3.3 Ramnagar OHSR:** This OHSR was constructed in 2012. This OHSR is continuously supplying water hence condition of reservoir could not assessed from inside. But there are spots of leakage observed at bottom dome hence it is required to do rehabilitation of this OHSR.

|                                                                                     |                                          |
|-------------------------------------------------------------------------------------|------------------------------------------|
|  | <p>Spots of leakage on conical dome.</p> |
|-------------------------------------------------------------------------------------|------------------------------------------|

|                                                                                    |                                                           |
|------------------------------------------------------------------------------------|-----------------------------------------------------------|
|   | <p>Site development works not done all round the tank</p> |
|  | <p>Spots of leakage at bottom dome</p>                    |

**5.3.4 Zone 6 OHSR:** This OHSR is constructed in 2012 but is not in use currently. Hence it is proposed to do hydro testing before using this OHSR.

|                                                                                     |  |
|-------------------------------------------------------------------------------------|--|
|  |  |
|-------------------------------------------------------------------------------------|--|



|                                                                                   |                                        |
|-----------------------------------------------------------------------------------|----------------------------------------|
|  | <p>Spots of leakage at bottom dome</p> |
|-----------------------------------------------------------------------------------|----------------------------------------|

**5.3.5 Zone 6 GLSR:** This GLSR was constructed in 2000. This GLSR is continuously supplying water hence condition of reservoir could not be assessed from inside. But there are spots of leakage observed in GLSR wall hence it is required to do rehabilitation of this GLSR.

|                                                                                      |                                          |
|--------------------------------------------------------------------------------------|------------------------------------------|
|   | <p>No Plinth protection around GLSR.</p> |
|  | <p>Spots of leakage in GLSR wall</p>     |

**5.3.6 Bhairudera OHSR :** This OHSR was constructed in 2006. This OHSR is continuously supplying water hence condition of reservoir could not be assessed from inside. But there are spots of leakage observed at bottom dome and conical dome hence it is required to do rehabilitation of this OHSR.

This OHSR consist of boundary wall all around. There is no plaster on the boundary wall & MS Jali provided over boundary wall is also damaged.

|                                                                                    |                                                           |
|------------------------------------------------------------------------------------|-----------------------------------------------------------|
|   |                                                           |
|  | <p>Spots of leakage at bottom dome &amp; conical dome</p> |

|                                                                                    |                                                                           |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
|   | <p>Damaged jali above boundary wall and boundary wall without plaster</p> |
|  | <p>No Plinth Protection at base of tank, No Side Development works</p>    |

**5.3.7 Suryamandir OHSR :** This OHSR was constructed in 2007. This OHSR is continuously supplying water hence condition of reservoir could not be assessed from inside. But there are spots of leakage observed at bottom dome and conical dome hence it is required to do rehabilitation of this OHSR.

|                                                                                     |                                                           |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------|
|  | <p>Spots of leakage at bottom dome &amp; conical dome</p> |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------|

|                                                                                   |                                                                        |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------|
|  | <p>No Plinth Protection at base of tank, No Side Development works</p> |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------|

**Following main activities are to be executed in these works -**

1. Wherever concrete cover has peeled off from concrete (Water retaining) structure, structure needs to be repaired with epoxy mortar with primer. All the corroded reinforcement bar shall be replaced with new bars.
2. All damages (spalling of plaster, spalling of concrete, damage to floor & wall, rusting of steel etc) to be made good by prior inspection of all existing structures.
3. All existing structures are to be repainted both inside and outside including doors, windows and railing etc.
4. All repairable concrete cracks to be made good by pressure grouting. Whereever spots of leakage are observed on bottom of conical dome, bottom dome, pressure grouting needs to be done.
5. All interior walls, ceilings & surfaces of the existing water retaining structure to be provided with food grade epoxy paint.
6. Removal of bushes and planting of trees in the vicinity of existing building/ structure with half brick circular tree guard (distance to be maintained from building/ structures).
7. Shotcreting needs to be done on the inside reservoir to strengthen the wall, bottom dome & conical dome.
8. Providing and laying 100mm thick M-30 grade interlocking paving blocks with kerb stone on both sides in a width of 3.0m from the entrance of premises to the existing building/ structure.
9. Replacing water level indicator with specified number of level indications.

**5.4. Status of existing Transmission main :**

A route survey has been carried along the alignment of the Existing Rising Main from Hanumangar Road CWR to different OHSR location at Sardarsahar Town. The existing line is of DI make and the condition of the line has been found to be satisfactory and barring its hydraulic suitability for the Ultimate Demand of Sardarsahar Town it can be used further. Presnetly there is no transmission main from CWR to Zone-5 & Zone -6 OHSR.





Existing Transmission main  
Pipe Line in workable  
condition.

### **5.5 Status of Existing Distribution main :**

Conditional assessment of the existing Distribution Network of Sardarsahar Town has been carried out by Engineers from STUP Consultant along with PHED Engineers, and following observations along with deficiencies has been noted : There is no distribution main from Zone-5 & Zone -6 OHSR presently.



Maintenance work carried out  
for uPVC line leakage repair at  
Ward-23, Pipe Line located at  
an approx depth of 7-8ft



Maintenance work carried out for uPVC line leakage repair at Ward-05, Pipe Line located at an depth of more than 12ft. Ladder being used for access of repair work.



Existing Distribution Line connection work at Ward No 14.



JCB being used for excavation work at Ward No 12 for Distribution Network



Leakage at Existing Distribution  
Network uPVC line, at Ward  
No- 06





Distribution Pipe Line located at an depth of more than 10ft at Ward No-15.

The Existing Distribution Network was commissioned in the year 2003 as per AapniYojna Scheme Phase-I, laying work started from 2001. At some of the places the condition of the existing line is deteriorating frequent leakage problems are being encountered at random. In most places accessibility for the maintenance work poses a big problem as the existing line is more than 10 ft deep, these problems are mainly encountered in Ward No :- 05 to 08. In other places depth of more than 7 ft is common. At some places the Existing Distribution Line alignment passes through houses and permanent structure making the system more vulnerable for maintenance works.

## Appendix 21: Sample Asbestos containing material (ACM) Management Plan

### BACKGROUND OF ASBESTOS

1. The purpose of this Asbestos Management Plan (AMP) is to identify, use appropriate methodology and scientifically handling /disposal of the Asbestos Containing Materials (ACM) in order to comply with the applicable National legislation and International standards in sync with norms of ADB's SPS 2009. ADB has mandated as per Appendix 5 - prohibit the investment activities list - production of, trade in, or use of un-bonded asbestos fibers is deliberated. As per SPS 2009 Safeguard Requirement 1, it is emphasized "that the borrower/client will provide workers with a safe and healthy working environment" in the work areas with accounted risks inherent to the work zone and defined safety instructions and standard operating procedures identifying roles and responsibilities.

2. Asbestos is a collective name given to a group of minerals that occur naturally as fiber bundles and possess high tensile strength, flexibility, heat resistance, non-biodegradability with chemical and physical durability. Asbestos is hydrated silicates with complex crystal structures. It is found in two configurations: chrysotile (derived from serpentine minerals) and amphibole is a naturally occurring mineral with long thin fibers. The most abundant asbestos used in the world is chrysotile. The use of ACM propagated due to its economic viability.

3. The purpose of this AMP is to identify, use appropriate methodology and scientifically handling /disposal of the Asbestos Containing Materials (ACM) in order to comply with the applicable National legislation and International standards in sync with norms of ADB's SPS 2009.. As per SPS 2009 Safeguard Requirement 1, it is emphasized "that the borrower/client will provide workers with a safe and healthy working environment" in the work areas with accounted risks inherent to the sector and defined safety instructions and standard operating procedures identifying roles and responsibilities.

### REGULATORY FRAMEWORK, STANDARDS AND PROTOCOL

Table.1

| Government of India Laws, Regulations and standards on Asbestos Applicable to the projects            | Requirements for the project                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IS 11768: 1986/2005: Recommendations for disposal of asbestos waste material                          | <p>The standard emphasis that every employer who undertakes work which is liable to generates asbestos containing waste, shall undertake adequate steps to prevent and /or reduce the generation of airborne dust during handling, storing, transportation and final disposal of final disposal of asbestos and asbestos containing products.</p> <ul style="list-style-type: none"> <li>• The crux is waste avoidance: the practice inculcated should focus the on minimal waste generation.</li> <li>• Waste Collection: In the project circumstance, the waste is referred to the damaged powered asbestos which will be collected in the Permissible plastic bags to be disposed off to the nearest TSDF facilities.</li> </ul> |
| IS 12081: Pictorial Warning to be implemented on equipment containing Asbestos Contaminated Products. | The objective of the caution is to make the person handling to take all pre-cautionary measures and make them aware of all the possible risk.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

|                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                               |                                                                                                                                                                                                                                                                                                         |
| IS 11451: Safety and Health Requirements related to Occupational Exposure to Asbestos contaminated Products.                                  | In the project the norms pertaining to limiting number of hours working with ACM will be 8.0 hrs/48 hrs a week and the medical examination has to be periodic, the environmental monitoring has to be done as per the protocol. The safety at work place shall be enforced.                                                                                                               |
| IS 11768: Waste Disposal Procedure for Asbestos Containing Products.                                                                          | The protocol pertaining to disposal of the waste is emphasized, the collection of ACM powered will be in permissible plastic bags, which will be twisted tight at the neck so that the wear and tear due to abrasion will be minimum and the transportation of the asbestos waste has to be done by the authorized vendor to the approved landfill site that in the project case id TSDF. |
| Sampling of asbestos fiber (as per BIS-11450) has to be done regularly using personal sampler and determined using phase contrast microscope. | The Sampling and analysis protocol is emphasized. Details are given as above.                                                                                                                                                                                                                                                                                                             |

Further, there are several legislations that regulate the use and handling of asbestos as applicable, namely:

- The Supreme Court of India – Banned ACM use in January 21 2011.
- National Green Tribunal - In pursuant to the above order, in 2015, NGT issued an order- “that there is no asbestos mining presently operational anywhere in the country and the operations of the mines of associated minerals with asbestos has also been halted.”
- Environmental (Protection) Act (1986)-Environmental monitoring.



## **RISK ASSESSMENT:**

4. The process of evaluation of risk at all the working sites was evaluated with the inventorization of the unscientific storage pipes-in case of worst scenario. The site identified and evaluated was Sardarshar. Site visit was conducted to evaluate the risk associated with the ACM handling and re- handling. Working with or handling AC pipes in manner that produces dust, fibers, air borne particles etc., is very harmful and hazardous to the workers and general public in and around the work sites. The condition of existing underground AC pipes are not known, however, as these are old certain pipes will be in deteriorated conditions. So the Conditions were presumed if it is in friable form or in a condition in which it can release fibers before it is subjected any disturbance or removal, all safeguard measures needs to be adopted. There were certain areas where the AC pipes were subjected to shear and are powered, and AC Pipe ends were damaged these were the high risk zones in the campus. The probability of the air borne asbestos fibers in the areas cannot be over ruled.

5. Thus it is necessitated to draft standard operating procedure for disposal of ACM. The purpose of this standard operating procedure (SOP) is to ensure the safe handling of AMC including protection from hazards associated with uncontrolled distribution, encounter and removal of Asbestos Cement (AC) Pipes and pipe fittings. The scope of this SOP encompasses all aspects of safe AC pipe handling including identification of site, re-handling and encountering of ACM, site selection and proper identification for storage, inventorization, monitoring, final disposal, training and maintenance of records.

6. The fatal health hazard with inhalation of air borne asbestos fibers and its adverse health impact are known and needs a proper attention and planning with defined roles and responsibilities to ensure the work zone is at minimal risk and safe for the workers. It is also necessary to mandate the standard operating procedures with implementation of all requisite safety gears.

7. The assessment of the ACM disposal will be vested with the DOB Operator. The undamaged pipe-where the pipe ends are intact that there is no damaged on the entire length of pipe-to be stored in isolated storage with secured pipe ends either by wrapping the ends with permissible plastic bags. The damaged/broken pipes/powered pipes will be disposed off, by bagging the same in permissible plastic bags. All the records pertaining to the inventorization has to be kept by the DBO Contractor. The same shall be cross verified by RUIDP.

## **EMERGENCY RESPONSE PLAN & CHANCE FIND PROTOCOL**

8. The emergency procedures should include managing an uncontrolled release of asbestos materials into the workplace. The onus of the same shall be ensured with immediate action of the field staff-DOB Operator/ HSE Staff. Steps should be taken to:

- Warn anybody who may be affected.
- Exclude from the area anyone not needed to deal with the release.
- Identify the cause of the uncontrolled release.
- Regain adequate control as soon as possible.
- Make sure anyone in the work area affected, who is not wearing personal protective equipments (PPEs), including respiratory protective equipment (RPE), leaves the affected area immediately.

- Minimize the spread of asbestos by ensuring they are suitably decontaminated.
- Clean up dust and debris.
- Decontaminate anyone who is contaminated with dust and debris.
- Ensure rags, clothing or PPE is decontaminated or disposed of as contaminated waste.
- Consider alone and/or remote workers to ensure they can alert someone if necessary.

Check what you're working on before you start:

- Avoid using a sweeping brush as this can spread asbestos.
- Make sure no unauthorised personnel enter the area.
- The clean-up of any accidental release of higher risk materials, eg asbestos cuttings, powered asbestos that may release the asbestos fibers, to be done by authorized person

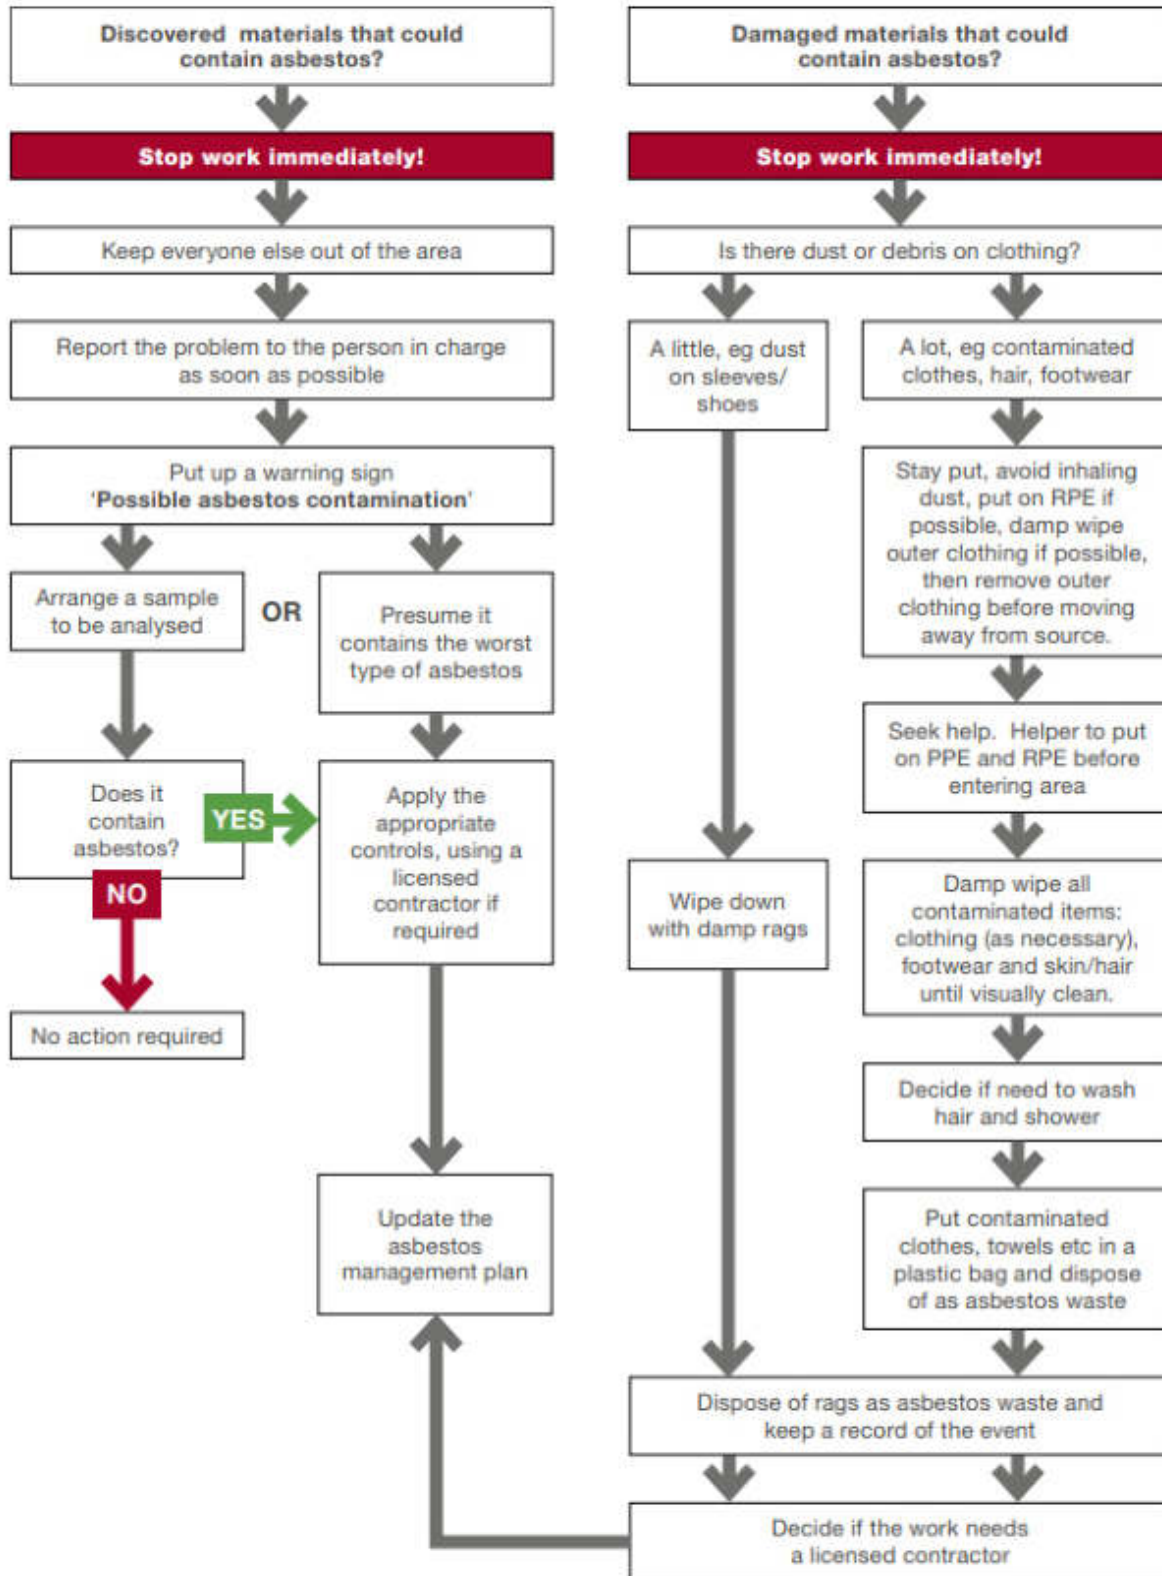


Fig.No.1-Showing Flow chart of ERP

Table.no.2-Roles and Responsibilities

| PRE-CONSTRUCTION                                                                                     |                        |                      |                  |                                                                                                                                                         |
|------------------------------------------------------------------------------------------------------|------------------------|----------------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Activities                                                                                           | Responsibilities       | Associated Documents | Estimated Cost   | Remark                                                                                                                                                  |
| Design to encounter minimal ACM, and then Identification & Inventorization ACM - AC pipes & fittings | RUIDP & DBO CONTRACTOR | Form-I               | Rs.100/km        | The onus of the minimal encounter of ACM is vested upon the RUIDP and inventory will be with the DOB Operator and has to be annually verified by RUIDP. |
| Define & confine ACM storage area-in-situ                                                            |                        |                      | Rs.65/Sq.m       | The storage area made available will be confined and fenced.                                                                                            |
| Warning signage near the ACM work site, storage and on AC pipes in local language**                  |                        |                      | Rs.500/label     | The signage labels can be printed, sticker pamphlets or painted.                                                                                        |
| Training of personals handling the AC pipes and fittings                                             | DBO CONTRACTOR         | Form-II              | Rs.1000/Person   | All requisite safety gears should be made available at all sites.                                                                                       |
| Use of safety Gears                                                                                  |                        |                      | Rs.6000/Person   | All the safety gears should be silicon based and suitable for Asbestos protection.                                                                      |
| Briefing of Emergency Response Plan                                                                  |                        |                      | Rs.500/Person    | All the risk zones with respect to white card has to be briefed.                                                                                        |
| Confined storage with access control plan                                                            |                        |                      | Rs.5000/site     | Inward and outward movement of authorized person must be allowed and has to be guarded or should be under key control.                                  |
| Pre-history medical records of the ACM handling team                                                 |                        |                      | Rs.3000/Person   | All requisite medical test, Respiratory test, lungs /Chest X-ray/CT Scan, Blood Test, Lower Abdomen examination etc                                     |
| CONSTRUCTION PHASE                                                                                   |                        |                      |                  |                                                                                                                                                         |
| Monthly Inspection & Annual Environmental Monitoring.                                                | DBO CONTRACTOR         | Form-III             | Rs.40,000/sample | The sampling zone should be 500 m from the storage site and personal sampling has to be as per SOP-2                                                    |
| Reporting in SEMR                                                                                    | RUIDP/ DBO CONTRACTOR  | None                 | Nil              | As per ADB Format                                                                                                                                       |
| Collection of Health records in compliance                                                           | DBO CONTRACTOR/R       | Form-IV              | Nil              | For regular evaluation & identification of any                                                                                                          |

|                                                                                                         |                       |                                 |                                               |                                                                                                                                                                                                                                                                                                                              |
|---------------------------------------------------------------------------------------------------------|-----------------------|---------------------------------|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| to the local laws                                                                                       | <b>UIDP/PHED/LSG</b>  |                                 |                                               | aboronmality.                                                                                                                                                                                                                                                                                                                |
| Ensure adoption of all standard operating procedure                                                     |                       | SOP-1&2                         | Nil                                           | As revision desired on basis of Site specific information may be upgraded in the SOP 1&2 if required                                                                                                                                                                                                                         |
| Collection, Segregation, Reception and Disposal as per National norms of ACM                            |                       | Form-V                          | Nil                                           | Standard Regulatory format has to be filled and disposed off within 90 days.                                                                                                                                                                                                                                                 |
| Use of safety gears prior to handling of ACM based on White Card.                                       |                       | White Card-Page-11              | Nil                                           | Periodic training can be site specific                                                                                                                                                                                                                                                                                       |
| Disposal of ACM to the indentified TSDF Facility to be done as per procedure within or prior to 90 days |                       | SOP-2                           | 1500/ton of waste plus freight as per actual. | Within 90 days from the generation of waste, in case of existing waste it has to be disposed off within 90 days from the Project Start.                                                                                                                                                                                      |
| To inform and fill the returns in the prescribed manifest as per HWMR.                                  |                       | Form-V(Form-10 of the Rule HWMR | Nil                                           | 90 days from the start of work                                                                                                                                                                                                                                                                                               |
| To facilitated a restricted confined storage space with access control with proper inventorization.     |                       | Form-II                         | Nil                                           | Site Specific                                                                                                                                                                                                                                                                                                                |
| In-situ storage of ACM.                                                                                 | <b>DBO CONTRACTOR</b> | Form-VI                         |                                               | <p>The storage of existing and encountered ACM pipes (more than 4.0 ft) will be stacked end to end at 90 deg. With vertical stacks, 8 inches above the ground, covered with permissible plastic sheet.</p> <p>The campus custodian-viz PHED etc should also be informed about the In-situ storage of ACM and its impact.</p> |

|                                                                                                                                                             |                         |                  |                  |                                                                                                                                                                                                                                                                                                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ACM removal                                                                                                                                                 | <b>DBO CONTRACTOR</b>   | --               | --               | Follow ACM Removal                                                                                                                                                                                                                                                                                       |
| Record maintenance of ACM in-situ and disposed off to TSDF                                                                                                  | <b>DBO CONTRACTOR</b>   | Form-I & Form-IV | Nil              | The copies of inventory generated and collected will have to be shared with Land Custodian (LC), RUIDP and DOB Operator. To distinguish the forms they can be numbered.<br>FORM-I(LC),Form-IV(LC)                                                                                                        |
| Transits ACM storage of waste to be disposed off to TSDF                                                                                                    | <b>DBO Contractor</b>   | Form-IV          | 50,000/room      | An isolated storage room should be constructed with 10x10 with height of 3.5 ft roofed properly for transit disposal of ACM to TSDF.<br><br><b>DISPOSABLE ASBESTOS WASTE STORAGE ROOM HAZARDOUS WASTE CATEGORY-15.2</b><br>(as per Hazardous waste management & Handling Rules 2015).                    |
| <b>POST CONSTRUCTION PHASE</b>                                                                                                                              |                         |                  |                  |                                                                                                                                                                                                                                                                                                          |
| Compliance of AAQM, Asbestos Fiber monitoring and Soil Quality monitoring and Periodic Work zone monitoring( Asbestos fiber count) records to be maintained | DBO Contractor          | SOP-2            | Rs.40,000/sample | The Asbestos Fiber count monitoring has to be conducted prior to ACM handling operation and after ACM Handling operation by an Accredited Laboratory. List of accredited laboratory will be available at Rajasthan State Pollution Control Board website- <a href="http://rspcb.nic.in">rspcb.nic.in</a> |
| Health records & Periodic Medical Checkup of the personals handling ACM to be maintained.                                                                   | PHED/LSG/DBO CONTRACTOR | Form-II          | Rs.3000/Person   | All the concerned employees deputed to handle or deal with ACM has to have Pre medical history and periodic medical examination done                                                                                                                                                                     |

## Permissible Levels

9. Permissible Exposure Limit (PEL) for asbestos is 0.1 fibers per cubic centimeter of air as an eight hour time weighted average (TWA), with an excursion limit (EL) of 1.0 asbestos fiber per cubic centimeter over a 30 minutes period.

## ACM REMOVAL

ACM Removal has to be checked in sync with the design and emphasis has to be laid to avoid the removal of ACM, in case it is unavoidable, then all the requisite safety gears are to be adopted:

- Inform the Asbestos Expert/HSE Expert prior to removal.
- Isolate the area with access to only trained staff/employees under supervision of Asbestos /HSE Expert.
- Exhibit all warnings



**Fig.No.2 Asbestos warning signage**

- Undertaken Asbestos fiber Monitoring
- The trained Employees have to be deputed for removal of ACM.
- The removal ACM material has to be check with the status and extent of damage.
- Efforts should be made to remove the ACM as minimal as possible.
- The ACM removal has to be manual; it should neither be cut nor drilled.
- All removal operation should be undertaken with ACM in wet condition.
- The removed ACM will then be labeled and placed on permissible plastic sheet. It should not



be put on ground directly.

- The dimension of plastic sheet should be larger than the ACM placed.
- If the ACM pipe is not damaged as about 4.0 ft and above, the ACM will be subjected for in-situ disposal.
- If the ACM is damaged and broken then it has to be packed in permissible plastic bags and disposed off to TSDF.
- Prior to disposal it can be stored in isolated room-showing board of –Hazardous waste storage room.
- The hazardous waste to be disposed off to TSDF should not be stored over 90 days after the removal date of ACM at site.
- All the safety procedures and safety gears should be worn by all the employees engaged in the ACM Removal operation.
- The Asbestos fiber monitoring, soil monitoring has to be undertaken during the operation as well.
- The process of removal of ACM will be completed after the removed ACM and its suitably disposed off either in -situ or to the isolated room prior to disposal at TSDF.
- Post ACM Removal asbestos fiber monitoring has to be undertaken to ensure the work zone is safe to resume further operations.

### **Safe Practices in Handling ACM**

#### **10. Proper handling and PPE:**

- a. Cover up and wear PPE (Personal Protection Equipment). including respirator or dust mask
- b. Make sure the mask has two straps to hold it firmly in place. Don't use masks that only have one
- c. Also wear a Hard hat, gloves, disposable coveralls with a hood, and safety glasses or goggles to protect eyes
- d. Do not eat, drink or smoke in the work area as you may inhale or eat dust. Wash your hands and face with soap and water before meal breaks and when finished work for the day.
- e. Do not use power tools Asbestos fibers can be released if power tools are used for anything other than the removal of screws.
- f. Do not water blast or scrub with a stiff broom or brush. It is illegal to water blast asbestos cement sheets. If the material has been accidentally water blasted or has suddenly deteriorated in some way, you should call a licensed asbestos removal DOB Operator
- g. Wet gently with water when removing asbestos cement pipes, use a pump spray to lightly dampen the pipes and keep the dust down. Remember: Not to waterblast asbestos cement materials.
- h. Avoid drilling and cutting into asbestos products.
- i. Do not drill holes through and never cut Instead remove the entire product and

replace it with a non-asbestos product

- j. Don't drop fiber pipes remove them carefully, Lower them to the ground, don't drop them, to minimize breakage.
  - k. Lay plastic sheeting under the work area to prevent any dust contaminating the ground. Use 200 micron thick plastic sheeting or bags or as permissble these must not be made from recycled materials or re-used for any other purpose.
  - l. The work area has to be barricaded and there should be no un-authorised person allowed. Only Trained ACM expert should be allowed to handle the ACM along with EHS Expert.
  - m. Close windows and doors and seal vents to stop dust getting into the house; ask neighbors' to do the same.
  - n. Seal off other places where dust can get in.
  - o. Remove soft furnishings like rugs, clothes, jute bags from the work area, and seal anything with plastics if it cannot be moved.
  - p. All the AC broken pipes have to collected and stacked properly with 200micron plastic wrapping with winning signage.
  - q. Do not leave plastic sheet lying about where they may be further broken or crushed by people or traffic.
  - r. Remove all ACM by the trained handler.
  - s. Since we are amidst of dry climatic conditions due care must be taken to see that no waste broken pipes or fittings are left loose and outside the confined area and may be dampened as required.
  - t. Mark and add signage.
11. Due care has to be taken to collect the dampened waste in a permissible standard bags with proper warning signage's.
12. The wastages packed have to be disposed off to Treatment, Storage or Disposal Facility (TSDF).The plastic bags must have legible note:
- d. Waste Type:
  - e. Date of packing:
  - f. Qty/Numbers:
  - g. Packed by:
  - h. Warning Signage:
  - i. Disposal



**Fig.No.3- ACM: In-situ storage warning**

13. The AMP procedures-**Standard Operating Procedure-01-** are as follows and are summarized as above


- j. Objectives – to keep the work zone safe and secured.
- k. Requirements – identify all the requirements needed for handling AC in the specific site and project
- l. Conduct and ensure awareness and vocational training to ACM handlers
- m. Conduct a comprehensive identification and risk assessment of ACMs
- n. Apply restriction / re-handling of ACM on ground-use of PPE. Ensure that workers handling ACM have the right PPEs as follows:
  - i. Hard helmet
  - ii. Overall suit
  - iii. Gloves
  - iv. Mask to be strapped tight
  - v. Safety goggles
  - vi. Safety shoes
  - vii. Ear plugs
- o. Avoid underground encountering of ACM
  - i. Ensure that an authorized person (HSE) are supervising the work
  - ii. Barricade the area with signage
  - iii. Damp ACM
  - iv. Use safety gears
  - v. Dismantle ACM to be labeled, kept on plastic grounding and packed in permissible bags
  - vi. Label the bags properly
  - vii. Ensure shipping to proper disposal sites
- p. Site selection – the disposal site should be ready to handle ACM and protect the nearby people as well The site selection criteria are as follows:
  - i. Away from habitation
  - ii. Avoid low lying areas
  - iii. Away from water storage
  - iv. To be enveloped with minimum of 8-feet height enclosure
  - v. Avoid high vertical stacks
  - vi. Access controlled
  - vii. Proper signage enclosure
- q. Proper re-handling of AMC, labeling and packing
- r. Control access and ensure proper monitoring of records, specifically:
  - i. Environment
  - ii. Health
  - iii. Reporting to regulators

Dispose the ACM through qualified DOB Operators up to the Total Sanitary Disposal Facility (TSDF)

### LIST OF APPROVED TSDF OPERATORS IN RAJASTHAN

| S.No | Operator                                                            | Address                                                                                                          | Remark                                                                                                       |
|------|---------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| 1.   | Rajasthan Waste Management Project (M/s Ramky Enviro Engineers Ltd) | Survey 1018/13, Vill-Gudli, Tehsil-Mavli, Zinc Choraha to Debari Railway Station Road, Dist Udaipur (Rajasthan). | This TSDF is for all kind of hazardous waste as listed in the hazardous waste (Management & Handling) Rules. |
| 2.   | Ramky Enviro Engineers Ltd, Balotra                                 | Ramky BWMP Rd, Rajasthan 344032.                                                                                 | This TSDF is for all kind of hazardous waste as listed in the hazardous waste (Management & Handling) Rules  |
| 3.   | Continental Petroleum Ltd                                           | Bheror, Distt- Alwar                                                                                             | Only for Incineration                                                                                        |

Label/display for TSDF disposal bags has to have clear display of the content in both English and local language as displayed under:

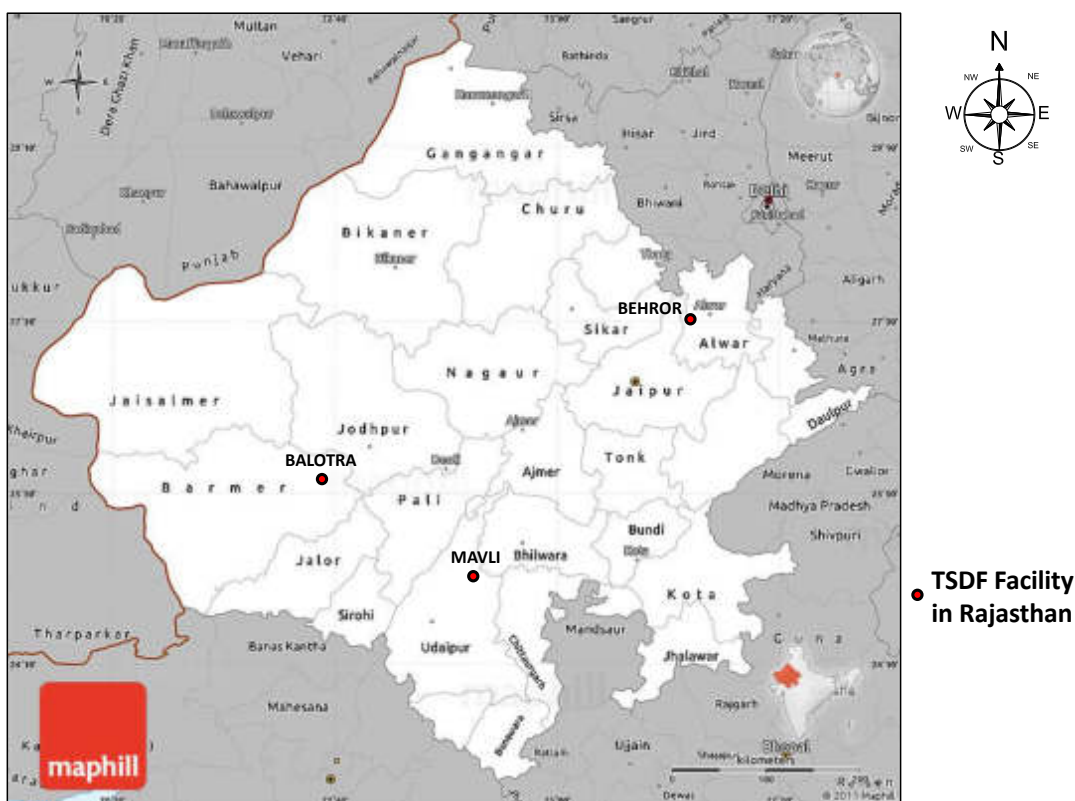

The above map clearly depicts the location of approved TSDF in Rajasthan.

### IN-SITU STORAGE ACM PIPES AREA

The removed undamaged ACM pipes have to be stacked properly as shown below

to avoid any rolling of the pipes and eventual damage. The existing ACM Pipe stacking has to be re-handled to stack the ACM pipes properly. If the removed ACM Pipes is less than the full length of the ACM pipes, then separate stack of the same should be done with proper pre-caution and safety measures and gears.

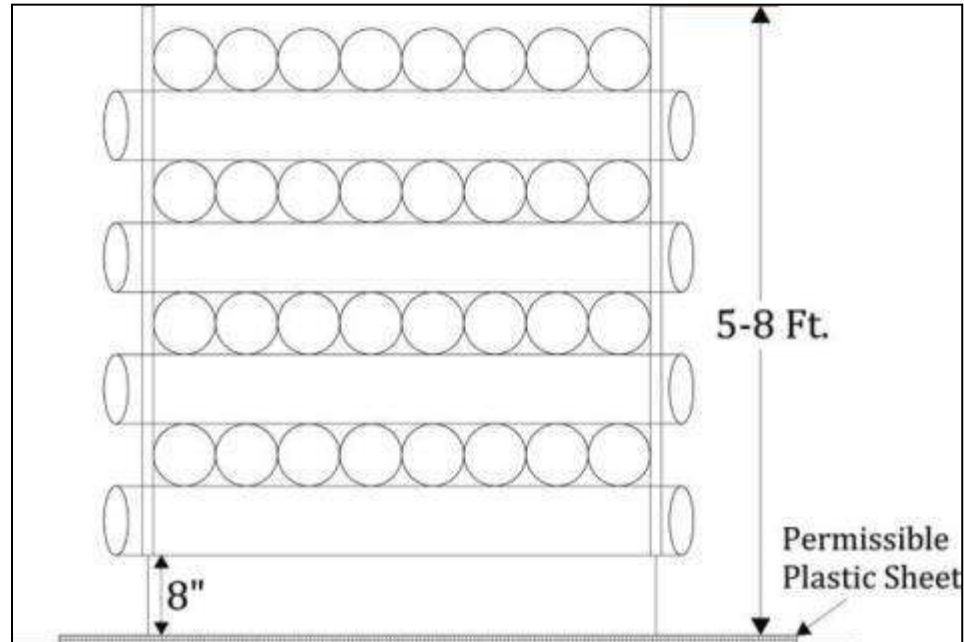


**Fig.No.5: Schematic diagram showing ACM Pipes stacking**

The ACM stack has to be enveloped with proper fencing showing internal movement of person with 4.0ft corridor all around the stack. The Storage area will have display of all requisite warning and access control of the authorized person's entry and exit.

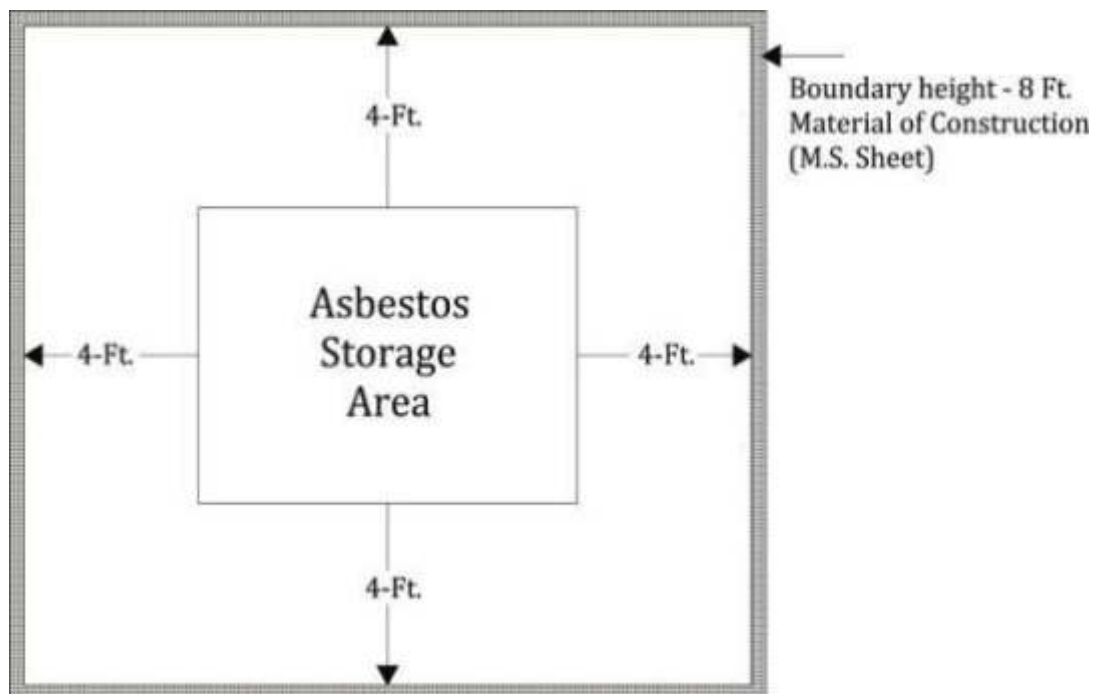
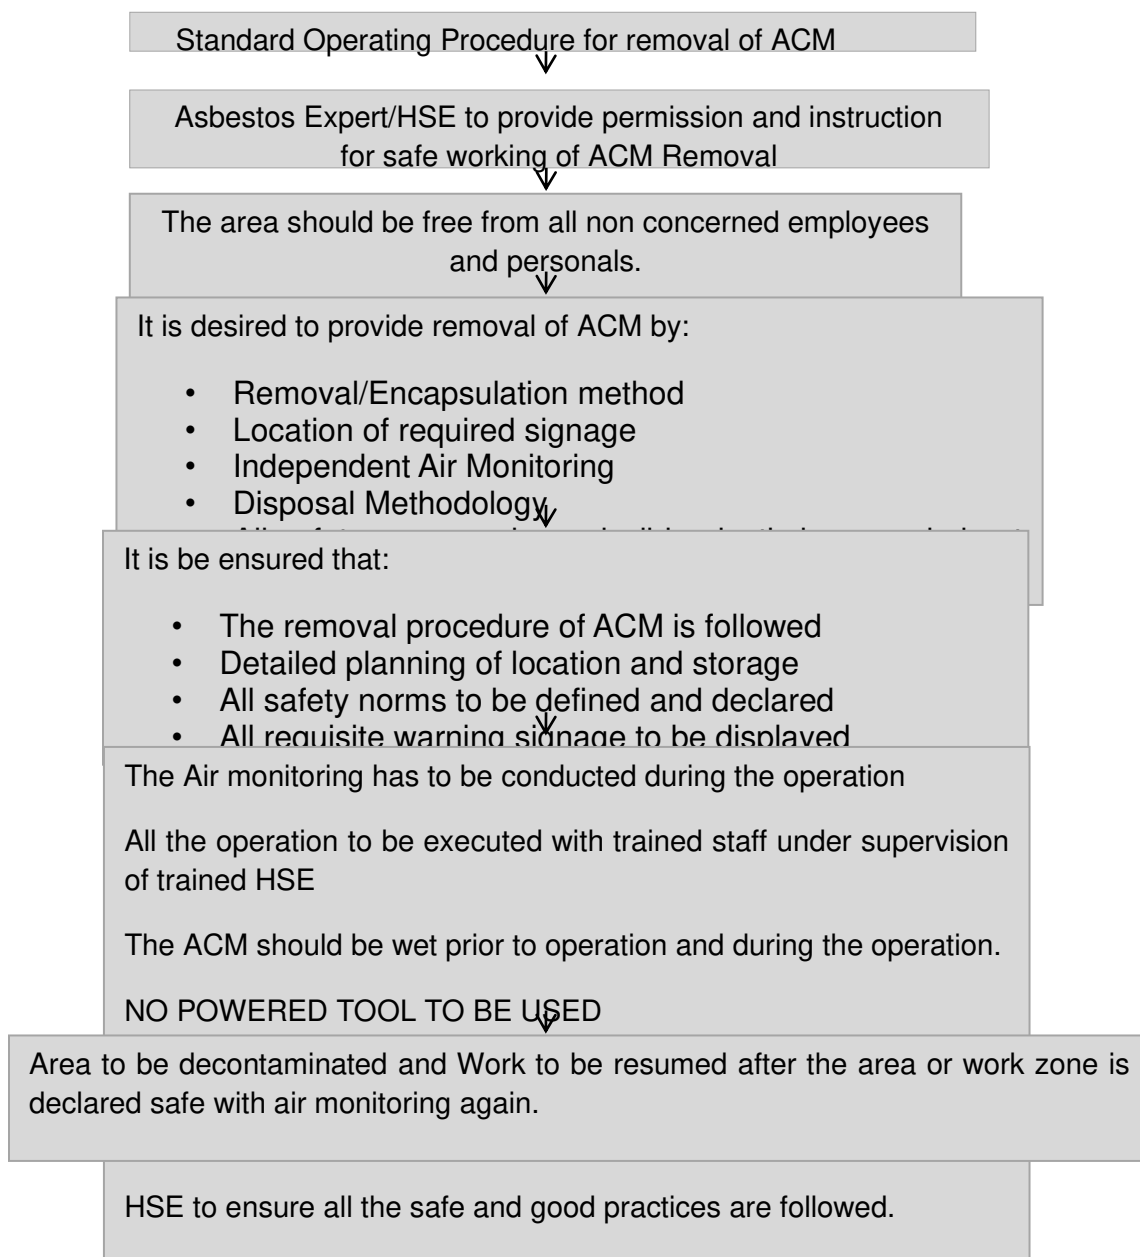


**Fig.No.6: Schematic diagram showing ACM Pipes storage area****Fig.no.2-Standard Operating Procedure Flow Sheet**

14. All the records in the pre-determined format are to be maintained and the disposal as stated in the applicable National legislation is to be followed. Any innovative use of the discarded ACM with the permissible law frame must be approved by respective Regulators prior to practice.

15. The format of Inventorization & records at all locations must be maintained irrespective of generation of ACM waste. The format of documentation must be uniform in order to track and trace the details as desired.

16. Based on the outcome of the workshop it was essential to enumerate the standard operating procedure & define the roles and responsibilities (already discussed as above) and the re-handling cost of the ACM as stated below:

**Table.03- Suggestive Protective measures & Estimation of the cost of Re-Handling of ACM**

|   |                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                          |                                                                                                                            |
|---|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| 1 | Re-Handling                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                          |                                                                                                                            |
|   | Re-handling of AC Pipes scattered/used in the premises. | <ul style="list-style-type: none"> <li>Re-Handling of the old AC Pipes in the premises needs to be quantified and a proper inventORIZATION has to be prepared.</li> <li>The isolated enveloped storage sites should be away from the habitation, the pipes used for fencing, tree guard needs to be re-handled &amp; stored in the nearest isolated storage site and the damaged pipes/broken pipes have to be disposed off to the TSDF with all pre-cautionary measures.</li> </ul> <div data-bbox="553 926 935 1073" style="border: 1px solid black; padding: 5px;"> <p><b>NOTE:</b> Only powered/ grounded ACM will have to be disposed off to TSDF.</p> </div> | Manpower engaged:<br><br>Trained labor,<br>Supervisor, HSE<br>Experts/Asbestos<br>Expert | The re-handling cost will be part of the laying program.<br><br>The disposal cost is Rs.1500/MT plus freight as per actual |
|   | Removal of encountered AC Pipes                         | <ul style="list-style-type: none"> <li>The damaged / broken AC Pipes have to be cautiously handled with prior moistening and packed in plastic bags (permissible plastic bags) and sent for re-use in road making or to TSDF with all signage and precautionary measures as suggested above.</li> </ul>                                                                                                                                                                                                                                                                                                                                                            | Manpower engaged:<br><br>Trained labor,<br>Supervisor, HSE<br>Experts/Asbestos<br>Expert | As stated above                                                                                                            |
|   | Storage                                                 | <ul style="list-style-type: none"> <li>The existing storage stacks have to be shielded with 8.0 ft height and above ground (min1.0 ft) The Pipes shall be stored in stacks with stoppers provided at the bottom layer to keep the pipe stack stable. The stack, particularly of smaller diameter pipes, shall be in pyramid shape. Pipes shall not be stacked more than 1.5 m high. Each stack shall have pipes of the same type and size only. Removal of pipes shall start from the top layer and by pulling from one end, if required, with all safety precautions. A pipe</li> </ul>                                                                           | Manpower engaged:<br><br>Trained labor,<br>Supervisor, HSE<br>Experts/Asbestos<br>Expert | As on daily wages                                                                                                          |



|                                                             |                                                       |                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                     |                         |
|-------------------------------------------------------------|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
|                                                             |                                                       | shall not be stored inside another pipe. The pipes may also be placed alternately length and crosswise. They shall be stored on horizontal racks supported throughout their lengths on a reasonably flat surface free from stones and sharp projections. They should not be stacked in large piles, especially under warm conditions. Open ends of pipes to be sealed with permissible polythene. |                                                                                                                                                                     |                         |
|                                                             | Transportation                                        | <ul style="list-style-type: none"> <li>• Full length pipes</li> <li>• Damaged/Broken Pipes</li> </ul>                                                                                                                                                                                                                                                                                             | Authorised agency                                                                                                                                                   | As per actual.          |
|                                                             | Disposal                                              |                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                     |                         |
|                                                             | Isolated storage                                      | The storage area should be twice the area required for storage of ACM                                                                                                                                                                                                                                                                                                                             | Manpower engaged:<br><br>Trained labor,<br>Supervisor, HSE<br>Experts/Asbestos<br>Expert.<br><br>Authorised vendor.<br><br>Boundary, signage,<br>safety aspects etc | As stated in Table 1.1. |
|                                                             | Sent to TSDF                                          | The damaged/broken pipes will be packed in permissible Poly bags and has to be stored in defined location within the isolated storage. The records pertaining to the disposal (within 90 days of generation) have to be made systematic. Possibilities of using the broken pipes in wet conditions in road making in order to bind the asbestos fibers can be explored.                           | Authorised agency                                                                                                                                                   | Freight as per actual.  |
| Estimation of suggestive protective and preventive measures |                                                       |                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                     |                         |
|                                                             | Air Quality sampling & Analysis- Asbestos fiber count | Personal sampler, phase contrast microscope, In case of asbestos dust, the same shall not exceed 2 mg/Nm <sup>3</sup> .<br><br>Per the OSHA standards for asbestos, exposure monitoring and medical surveillance of workers is required when the Workers are or will                                                                                                                              | Approved/accredited laboratory                                                                                                                                      | As stated above.        |

|  |                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                            |                 |
|--|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
|  |                      | <p>be exposed to airborne concentrations of fibers of asbestos at or above OSHA's exposure limits for a combined total of 30 or more days per year; Workers perform work that disturbs asbestos-containing material (ACM) or presumed asbestos-containing material (PACM) for a combined total of 30 or more days per year.</p> <p>Minimum 3 locations (@120deg from each location) at min 500 m from the isolated storage of ACM and one sampling near the encountered site. The frequency of monitoring should be bi-annually.</p> |                                            |                 |
|  | PPE's                | Hard helmet, double strapped mask, safety tapes, boots(non laced), gloves, safety suits, goggles, ear plugs,                                                                                                                                                                                                                                                                                                                                                                                                                         | Standard make, minimum-4 sets at each site | As stated Above |
|  | Education & Training | Awareness, New induction training and inspections                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Asbestos expert/HSE Experts                | As stated Above |
|  | Medical Check up     | As per norms or in consultation with Medical Practitioner.                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Medical Doctor                             | As stated Above |

**Note:**

Efforts should be made to minimize the existing AC water pipes. In areas where ACM are stored, it is required to have induction training of AMP, complete the formats and maintain the records.

Removals of used AC Pipes for fencing, boundary wall etc have to be carefully removed from use and stored in isolated storage.

At certain locations, it was observed that the discarded pipes was used as tree guard, when the sapling was planted as on date the tree is fully grown, in that case the removal of ACM has to be done with all precautions and use of total safety gears. Hand tools or slow-running tools producing coarse dust or chips should be used where practicable rather than high-speed machines or those which cut by abrading the material after wetting. Alternatively, the same can also be bounded properly by bitumen paint.

The coarse dust and pieces in wet conditions will have to be collected in permissible plastic bags with use of all safety gears.

The collected wastes are to be labeled as stated above and disposed off to TSDF. The records of the same will have to be kept on daily basis and summarized to monthly basis.

| <b>FORM I – ASBETOS INVENTORY, INSPECTION AND ACTION FORM</b>                                                                                                                         |              |                                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------------------------------------------------------|
| <b>Format: RUIDP/IIA/ LOCATION/NAME OF DBO CONTRACTOR/HSE 002/YEAR</b>                                                                                                                |              |                                                      |
| <b>Location:</b>                                                                                                                                                                      |              |                                                      |
| <b>Site co-ordinates:</b>                                                                                                                                                             |              |                                                      |
| <b>Elevation:</b>                                                                                                                                                                     | <b>Team:</b> |                                                      |
| <b>Date of visit</b>                                                                                                                                                                  | <b>Sign:</b> |                                                      |
| Present Status                                                                                                                                                                        |              | Indicate if installed, operational, in storage, etc. |
| Original age                                                                                                                                                                          |              | Months or years since installation                   |
| Diameter                                                                                                                                                                              |              | mm or inches                                         |
| Length                                                                                                                                                                                |              | meters                                               |
| Volume                                                                                                                                                                                |              |                                                      |
| Total packet                                                                                                                                                                          |              |                                                      |
| Packing date                                                                                                                                                                          |              |                                                      |
| Disposal date                                                                                                                                                                         |              |                                                      |
| Existing Site (Photo or illustrations):                                                                                                                                               |              |                                                      |
| Illustration/ Design of Activities On-site with respect to existing asbestos (include details such as size of new pipes, distance from existing AC pipes, other notable observations) |              |                                                      |
| DBO Contractor Handling Asbestos:                                                                                                                                                     |              |                                                      |
| Number of persons handling waste                                                                                                                                                      |              |                                                      |
| Medical Records                                                                                                                                                                       |              |                                                      |
| Safety Gears                                                                                                                                                                          |              |                                                      |
| Vocational Training Last Conducted:<br>Number of attendees:<br>Conducted by Schedule:                                                                                                 |              |                                                      |
| Required Actions:                                                                                                                                                                     |              |                                                      |
| Remarks                                                                                                                                                                               |              |                                                      |
| <b>Conclusion/Remark</b>                                                                                                                                                              |              |                                                      |
| <b>HSE Signatory</b>                                                                                                                                                                  |              |                                                      |

**FORM-II – MATRIX FOR TRAINING & RECORDS**

|                                                                                            |                                             |                                                                                                                                  |                 |
|--------------------------------------------------------------------------------------------|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Format: RUIDP/INSP.MATRIX/LOCATION/NAME OF DBO CONTRECTOR/HSE 001/YEAR</b>              |                                             |                                                                                                                                  |                 |
| <b>S. No.</b>                                                                              | <b>Aspects of ACM</b>                       | <b>Check points</b>                                                                                                              | <b>Remarks</b>  |
| <b>Training Schedule:</b>                                                                  |                                             |                                                                                                                                  |                 |
| <b>Trainer Details:</b>                                                                    |                                             |                                                                                                                                  |                 |
| <b>Date/Location of Training:</b>                                                          |                                             |                                                                                                                                  |                 |
| <b>Number of attendees:</b>                                                                |                                             |                                                                                                                                  |                 |
| <b>Training Schedule, Training Materials &amp; Attendance Sheet, Feedback of Trainees.</b> |                                             |                                                                                                                                  |                 |
| <b>Understanding of:</b>                                                                   |                                             |                                                                                                                                  |                 |
| <b>A. DOCUMENTS AND RECORDS</b>                                                            |                                             |                                                                                                                                  |                 |
| <b>1.</b>                                                                                  | Site Inventory                              |                                                                                                                                  |                 |
| <b>2.</b>                                                                                  | List of ACM storage and installation points |                                                                                                                                  |                 |
| <b>3.</b>                                                                                  | Structure of ACM management committee       |                                                                                                                                  |                 |
| <b>B. INVENTORY</b>                                                                        |                                             |                                                                                                                                  |                 |
| <b>1.</b>                                                                                  | Inventorization of ACM                      |                                                                                                                                  |                 |
|                                                                                            | Number of ACM/ pipes                        |                                                                                                                                  |                 |
|                                                                                            | Dimensions of ACM/ pipes                    |                                                                                                                                  |                 |
|                                                                                            | Total volume of ACM/ pipes                  |                                                                                                                                  |                 |
| <b>2.</b>                                                                                  | Storage facility/ installation location:    |                                                                                                                                  |                 |
| <b>A.</b>                                                                                  | In-use                                      | Location                                                                                                                         |                 |
|                                                                                            |                                             | Condition                                                                                                                        | Intact/ damaged |
|                                                                                            |                                             | Purpose                                                                                                                          |                 |
|                                                                                            |                                             | Accessibility by the workers                                                                                                     |                 |
|                                                                                            |                                             | Evidence of physical damage and approximate size (length, width, volume) without coming into contact with<br><br>The damaged ACM |                 |

|    |                                                                   |                                                                              |  |
|----|-------------------------------------------------------------------|------------------------------------------------------------------------------|--|
|    |                                                                   | Impacts on the environment<br>(Based on Asbestos fiber Monitoring)           |  |
| 3. | <b>LABELING AND SIGNAGE</b>                                       |                                                                              |  |
|    | Notification to workplace safety and health                       |                                                                              |  |
|    | Working instruction                                               |                                                                              |  |
|    | The risks associated with exposure to asbestos fibers             |                                                                              |  |
|    | Cautionary statement to not disturb materials containing asbestos |                                                                              |  |
| 4. | <b>PERSONAL PROTECTIVE EQUIPMENT (PEP)</b>                        |                                                                              |  |
|    | Record of pep                                                     |                                                                              |  |
|    | Mask                                                              |                                                                              |  |
|    | Eye glasses                                                       |                                                                              |  |
|    | Gloves                                                            |                                                                              |  |
|    | Ear muffs                                                         |                                                                              |  |
|    | Others                                                            |                                                                              |  |
|    | Training                                                          |                                                                              |  |
|    | On occupational risks of asbestos to the workers                  | Date:<br>Time:<br>In-house/ external:<br>Faculty:<br>No of workers attended: |  |
|    | Training for maintenance, repair and renovation                   | Date:<br>Time:<br>In-house/ external:<br>Faculty:<br>No of workers attended: |  |
|    | Training for workers working with asbestos                        | Date:                                                                        |  |

|                                                      |                                         |                                                                                                      |
|------------------------------------------------------|-----------------------------------------|------------------------------------------------------------------------------------------------------|
|                                                      |                                         | Time:<br><br>In-house/ external:<br><br>Faculty:<br><br>No of workers attended:                      |
|                                                      | Periodic air quality monitoring records | • Within the permissible limits<br>• Not within the permissible limits<br>(specify the reason)       |
|                                                      | Workers medical check-up records        | Date:<br><br>In-house/ external:<br><br>Performed by:<br><br>Remarks:<br><br>No of workers attended: |
| <b>Conclusion/Remark</b><br><br><b>HSE Signatory</b> |                                         |                                                                                                      |

The all the data required in Form-II will be filled by the DOB Operator (HSE-Officer), the records of this document has to be maintained for a pre-decided life. Details of training imparted have to be file with appropriate evidence like photographs, feedback form, videos etc. There has to be a proper documentation of the records kept with highest level of transparency to retrieve, trace and track the records as necessary. The records maintained by the DOB Operator, has to be audited regularly by the ACM-Expert.

Form-I has to be accompanied with Form-II. Defined period of Air Quality monitoring and health will have to be minimum twice a year. Where ever the fiber counts are found/ recorded beyond the permissible norms, corrective action, like:

- ☐ Cordon off the area of ACM
- ☐ HSE team with trained experts to be deputed for the task
- ☐ Moisten the ACM prior to handling
- ☐ Storage area of the ACM stacks to be covered
- ☐ The damaged/deteriorated ACM to be re-handled in presence of Asbestos Expert/ HSE (Trained) with all defined norms and safety gears.
- ☐ Disposal of damaged/deteriorated ACM to be done as per the Norms.
- ☐ Records of disposal to be maintained.
- ☐ Keep all requisite evidence in form of documentation, geo-tagged photographs etc
- ☐ Frequency of health monitoring at such locations to be increased.

### Form-III-Air Quality Monitoring and Results

|                                                                         |                 |               |                           |                    |
|-------------------------------------------------------------------------|-----------------|---------------|---------------------------|--------------------|
| <b>Format: RUIDP/AQMR/ LOCATION/NAME OF DBO CONTRACTOR/HSE 003/YEAR</b> |                 |               |                           |                    |
| <b>Vendor details</b>                                                   |                 |               |                           |                    |
| <b>Approvals</b>                                                        |                 |               |                           |                    |
| <b>S.No</b>                                                             | <b>Location</b> | <b>Agency</b> | <b>Results&amp; Norms</b> | <b>Permissible</b> |
|                                                                         |                 |               |                           |                    |
|                                                                         |                 |               |                           |                    |
|                                                                         |                 |               |                           |                    |
|                                                                         |                 |               |                           |                    |
| <b>Conclusion/Remark</b>                                                |                 |               |                           |                    |
| <b>HSE Signatory</b>                                                    |                 |               |                           |                    |

### FORM-IV-Medical History

|                                                                       |             |                         |                                               |                                                       |                    |                              |                        |
|-----------------------------------------------------------------------|-------------|-------------------------|-----------------------------------------------|-------------------------------------------------------|--------------------|------------------------------|------------------------|
| <b>Format: RUIDP/MH/ LOCATION/NAME OF DBO CONTRACTOR/HSE 004/YEAR</b> |             |                         |                                               |                                                       |                    |                              |                        |
| <b>Employee code:</b>                                                 |             |                         |                                               |                                                       |                    |                              |                        |
| <b>Employer Details:</b>                                              |             |                         |                                               |                                                       |                    |                              |                        |
| <b>PPE Used:</b>                                                      |             |                         |                                               |                                                       |                    |                              |                        |
| <b>Insurance/ESI</b>                                                  |             |                         |                                               |                                                       |                    |                              |                        |
| <b>S.No</b>                                                           | <b>Name</b> | <b>Age/Sex/D<br/>OB</b> | <b>Address/<br/><br/>Contact<br/>details:</b> | <b>Period        of<br/>Employment/<br/>Job Title</b> | <b>Pre-History</b> | <b>Doctor's<br/>comments</b> | <b>HSE<br/>Remarks</b> |
|                                                                       |             |                         |                                               |                                                       |                    |                              |                        |



|             |  |  |  |  |                                                                                                                                                                                                                                                                    |        |  |            |  |             |  |       |  |         |  |        |  |  |  |
|-------------|--|--|--|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--|------------|--|-------------|--|-------|--|---------|--|--------|--|--|--|
|             |  |  |  |  | <table border="1"> <tr> <td>Height</td> <td></td> </tr> <tr> <td>Weight/BMI</td> <td></td> </tr> <tr> <td>Blood group</td> <td></td> </tr> <tr> <td>X-Ray</td> <td></td> </tr> <tr> <td>CT Scan</td> <td></td> </tr> <tr> <td>others</td> <td></td> </tr> </table> | Height |  | Weight/BMI |  | Blood group |  | X-Ray |  | CT Scan |  | others |  |  |  |
| Height      |  |  |  |  |                                                                                                                                                                                                                                                                    |        |  |            |  |             |  |       |  |         |  |        |  |  |  |
| Weight/BMI  |  |  |  |  |                                                                                                                                                                                                                                                                    |        |  |            |  |             |  |       |  |         |  |        |  |  |  |
| Blood group |  |  |  |  |                                                                                                                                                                                                                                                                    |        |  |            |  |             |  |       |  |         |  |        |  |  |  |
| X-Ray       |  |  |  |  |                                                                                                                                                                                                                                                                    |        |  |            |  |             |  |       |  |         |  |        |  |  |  |
| CT Scan     |  |  |  |  |                                                                                                                                                                                                                                                                    |        |  |            |  |             |  |       |  |         |  |        |  |  |  |
| others      |  |  |  |  |                                                                                                                                                                                                                                                                    |        |  |            |  |             |  |       |  |         |  |        |  |  |  |
|             |  |  |  |  | <b>Smoker:</b><br><br><b>Tobacco:</b><br><br><b>Alcohol Consumption:</b><br><br><b>Family History:</b><br><br><b>Medication if any:</b><br><br><b>Eye sight:</b><br><br><b>Hearing:</b><br><br><b>Others:</b>                                                      |        |  |            |  |             |  |       |  |         |  |        |  |  |  |

### FORM -V

**[FORM-10- as per rule 19 (1) of Hazardous waste Handling & Management Rules-2016]**

### MANIFEST FOR HAZARDOUS AND OTHER WASTE

|     |                                                                         |                   |                                        |
|-----|-------------------------------------------------------------------------|-------------------|----------------------------------------|
| 1.  | Sender's name and mailing address<br>(including Phone No. and e-mail)   |                   |                                        |
| 2.  | Sender's authorisation No.                                              |                   | •                                      |
| 3.  | Manifest Document No.                                                   |                   | •                                      |
| 4.  | Transporter's name and address:<br>(including Phone No. and e-mail)     |                   |                                        |
| 5.  | Type of vehicle                                                         | •                 | (Truck/Tanker/Special Vehicle)         |
| 6.  | Transporter's registration No.                                          |                   | •                                      |
| 7.  | Vehicle registration No.                                                |                   | •                                      |
| 8.  | Receiver's name and mailing address<br>(including Phone No. and e-mail) |                   |                                        |
| 9.  | Receiver's                                                              | Authorisation No. |                                        |
| 10. | Waste description                                                       |                   | •                                      |
| 11. | Total quantity No. of Containers                                        |                   | •                                      |
|     |                                                                         |                   | .....m <sup>3</sup> or MT<br>.....Nos. |

|     |                                                                   |                                                                                                                                                                                                                                                                                                      |       |  |     |  |  |  |      |  |  |  |  |
|-----|-------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--|-----|--|--|--|------|--|--|--|--|
| 12. | Physical form                                                     | (Solid/Semi-Solid/Sludge/Oily/Tarry/Slurry/Liquid)                                                                                                                                                                                                                                                   |       |  |     |  |  |  |      |  |  |  |  |
| 13. | Special handling instructions and additional information          |                                                                                                                                                                                                                                                                                                      |       |  |     |  |  |  |      |  |  |  |  |
| 14. | Sender's Certificate                                              | I hereby declare that the contents of the consignment are fully and accurately described above by proper shipping name and are categorised, packed, marked, and labeled, and are in all respects in proper conditions for transport by road according to applicable National Government regulations. |       |  |     |  |  |  |      |  |  |  |  |
|     | Name and stamp:                                                   | Signature:                                                                                                                                                                                                                                                                                           | Month |  | Day |  |  |  | Year |  |  |  |  |
|     |                                                                   |                                                                                                                                                                                                                                                                                                      |       |  |     |  |  |  |      |  |  |  |  |
| 15. | Transporter acknowledgement of receipt of Wastes                  |                                                                                                                                                                                                                                                                                                      |       |  |     |  |  |  |      |  |  |  |  |
|     | Name and stamp:                                                   | Signature:                                                                                                                                                                                                                                                                                           | Month |  | Day |  |  |  | Year |  |  |  |  |
|     |                                                                   |                                                                                                                                                                                                                                                                                                      |       |  |     |  |  |  |      |  |  |  |  |
| 16. | Receiver's certification for receipt of hazardous and other waste |                                                                                                                                                                                                                                                                                                      |       |  |     |  |  |  |      |  |  |  |  |
|     | Name and stamp:                                                   | Signature:                                                                                                                                                                                                                                                                                           | Month |  | Day |  |  |  | Year |  |  |  |  |
|     |                                                                   |                                                                                                                                                                                                                                                                                                      |       |  |     |  |  |  |      |  |  |  |  |

### FORM –VI

#### In-situ Storage of ACM

| S.No                                                                                                                                                                                                                                                                                                                                                          | Activity | Number of Stacks | Area occupied | Details of ACM Pipes |  | Day/month/year<br>Of storage |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------------------|---------------|----------------------|--|------------------------------|
|                                                                                                                                                                                                                                                                                                                                                               |          |                  |               |                      |  |                              |
|                                                                                                                                                                                                                                                                                                                                                               |          |                  |               |                      |  |                              |
|                                                                                                                                                                                                                                                                                                                                                               |          |                  |               |                      |  |                              |
|                                                                                                                                                                                                                                                                                                                                                               |          |                  |               |                      |  |                              |
| <b>Site History</b>                                                                                                                                                                                                                                                                                                                                           |          |                  |               |                      |  |                              |
| For existing Stacks, details of re-handling of pipes in number or volume to be mentioned under supervision of Authorized Experts.                                                                                                                                                                                                                             |          |                  |               |                      |  |                              |
| Details of Location of re-handled ACM storage, new area should be <ul style="list-style-type: none"> <li>• Minimum 10-15 ft away from campus habitation.</li> <li>• 250m away from the water sources</li> <li>• 500-800m away from Children play area</li> <li>• The area should be isolated and covered from all the sides with restricted Access</li> </ul> |          |                  |               |                      |  |                              |

|                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| for Authorised Experts Only.<br><ul style="list-style-type: none"> <li>• Register to be maintained for Entry&amp; Exit of personals.</li> <li>• Register to be maintained for Entry &amp; Exit of ACM</li> <li>• Labels to be displayed in legible format</li> <li>• Specific training of ACM to be inducted in the ACM storage area for residing population in the campus.</li> </ul> |
| Details of transit storage of ACM to be maintained as per norms in an isolated storage room full covered                                                                                                                                                                                                                                                                               |

## Standard Operating Procedure-02

### Asbestos Fiber Monitoring, Analysis and Identification

#### Principle

1. The collection of environmental samples including air must follow an appropriate sampling procedure. A review of method for sampling of asbestos fibers has been published (IPCS, 1986). The most commonly used analytical method involves phase contrast optical microscopy (PCOM) in the work place and transmission electron microscopy (TEM) in the general environment. The phase contrast optical microscopy (POCM) is universally recommended for asbestos analysis (Eache and Groff, 1997; Dion and Perrault, 1994) including Bureau of Indian Standard. POCM coupled with polarized light is largely used for asbestos analysis in solid samples (USEPA, 1993). The fiber monitoring has to be done by any NABL/MOEF&CC accredited laboratory either in-house or by third party.

#### Monitoring of Asbestos Fiber in Air

2. A general survey of inside and outside the storage sites of the work zone has to be conducted to choose the sampling sites. Sampling is to be carried out at visually selected locations appeared more prone to emission or possibility of release of asbestos fiber. The sample collected by drawing a measured quantity of air through cellulose ester a membrane filter by a battery operated sampling pump that was fully charged to operate continuously over the chosen sampling time. The exposed filters will then be placed into plastic petri dishes and transferred carefully to the laboratory.
3. Two types of samples are to be taken, one within the workers breathing zone that is 300 mm radius extending in front of the face, and measured from the midpoint of a line bisecting the ears called *personal samples*. The samples taken at a fixed location mostly near to the source point called *area or static samples*. Personal sampler model "XX 5700000" and low volume vacuum/pressure pump model "XX5622050" attached with monitor or cowl model "MAWP025AC" of Millipore Corporation, USA are to be used for the collection of personal and area samples, respectively. The flow rate of pump is to be adjusted to 1litre per minute. The flow rate checked before and after in each monitoring, those samples showing the difference by >10 percent from the initial flow rate are to be rejected. In both the samples filter holder (Cowl) always pointed downward position to avoid the deposition of heavy particles. An ester cellulose membrane filters "AAWP02500" having 0.8  $\mu\text{m}$ -1.2  $\mu\text{m}$  pore size diameter are to be used throughout the sampling for asbestos counts at work environment.

### Mounting Procedure

4. Complete filter is to be placed on clean microscopic slide, dust side up at room temperature. Electrostatic force keeps the filter usually on the slide. Filters are to be exposed to acetone fumes and triacetin (Glycerol triacetate, Sigma). In this procedure a small quantity of acetone in round bottom flask (500-1000ml) heated at the boiling point underwater bath, the vapors condensed in a simple condensing column. When the sufficient fumes of acetone become ready then pass it throughout on the filter for 3-5 seconds at a distance of 15-25 mm. put the 1-3 drops of Glycerol Triacetate (Triacetin) on the acetone-cleared filter. Place a cover slip on cleared filter by avoiding the air bubbles. Heat the cleared filter at 50°C for 15 minutes and leave it at room temperature for 24 hours under the action of triacetin to clear entire filter. Alternatively, membrane filter can also be made transparent with immersion oil (Leica Microsystems Wetzlar GmbH, Wetzlar). Using a phase contrast microscope with polarized light, Laborlux S (of M/s Leica, Germany) and then counting has to be done at magnification 400X-500x

$$C = A/a \times N/n \times 1/r \times 1/t$$

Where:

C= concentration in fibers per cubic centimeter rounded to first place of decimal,

N = total no. of fiber counted,

n = number of graticule areas observed,

A= effective filter area in mm<sup>2</sup>

a= graticule counting area in mm<sup>2</sup>,

r= flow rate of air through filter in cm<sup>3</sup>/min., and

t= single sample duration in minutes

5. To rule out the probability of the air borne asbestos in the existing scenario at the said site as well as other similar sites at the different work zones, it is necessary to have the asbestos fiber monitoring and sampling counts to be recorded at regular intervals. The environmental air sampling stations will have to be minimum three at 120 degree angle, within 1000-500 m from the ACM. The sampling frequency has to be in all three stages- Pre-Construction, Construction and Post Construction, while the personal sampling has to be done as stated above.
6. Bureau of Indian Standards (BIS) Guidelines for Safe Use of Products containing Asbestos states that "Asbestos cement products (such as AC pipes) generally contain about 10-15% asbestos fibers in a cement matrix that comprises the rest of the materials and are termed as locked in asbestos products as these products have the asbestos fibers bound in cement. The possibilities of air borne asbestos fiber will be in case of mishandling of encountered pipes with unsafe practice. During storing and installation; recommended work practices shall be followed to avoid harmful exposure". According to Hazardous and Other Wastes (Management and Trans-boundary Movement) Rules, 2016, any waste with asbestos concentration limit of 10,000 mg/kg (i.e. 1%), however this will apply only if the asbestos containing substances are in a friable, powdered or finely divided state. Under the Basel Convention<sup>49</sup>, asbestos or asbestos waste in the form of dust and fibers is classified as hazardous waste. The applicable legislation under the present scenario are:

---

<sup>49</sup> Basel Convention on the Control of Trans-boundary Movements of Hazardous Wastes and their Disposal, adopted in 1989

### Summary of Asbestos Management Plan

| Field                                        | Anticipated Impact                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Responsible for Implementation/<br>Monitoring | Remark                                                                                                                                               |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Clearing, transfer and disposal of ACM pipes | <p>Possibilities of air borne asbestos if handled unsafely, cut, drilled or broken into pieces that may cause:</p> <ul style="list-style-type: none"> <li><input type="checkbox"/> Inflammation of the lungs</li> <li><input type="checkbox"/> Mesothelioma</li> <li><input type="checkbox"/> Peritoneal mesothelioma</li> <li><input type="checkbox"/> Pleural plaques</li> <li><input type="checkbox"/> Asbestosis</li> <li><input type="checkbox"/> Bronchogenic Carcinoma</li> <li><input type="checkbox"/> Second hand-exposure</li> </ul> | Implement the AMP strictly that includes identification of hazards, the use of proper safety gear and disposal methods.                                                                                                                                                                                                                                                                                                                                                                                     | DBO Contractor /RUIDP                         | There has to be a suitable call to be taken for in-situ disposal if the removed ACM pipes are not damaged, full length or 4.0 ft length not damaged. |
| Work in narrow streets                       | <p>Possibilities of air borne asbestos if handled unsafely cut, drilled or broken into pieces that may cause:</p> <ul style="list-style-type: none"> <li><input type="checkbox"/> Inflammation of the lungs</li> <li><input type="checkbox"/> Mesothelioma</li> <li><input type="checkbox"/> Peritoneal mesothelioma</li> <li><input type="checkbox"/> Pleural plaques</li> <li><input type="checkbox"/> Asbestosis</li> <li><input type="checkbox"/> Bronchogenic Carcinoma</li> </ul> <p>Second hand-exposure</p>                             | <p>Conduct awareness program on safety during the construction work</p> <p>Undertake the construction work stretch-wise; excavation, pipe laying and trench refilling should be completed on the same day</p> <p>Provide barricades, and deploy security personnel to ensure safe movement of people and also to prevent unnecessary entry and to avoid accidental fall into open trenches</p> <p>Identify risk of intervention with existing AC pipes. If there is significant risk, implement the AMP</p> | DBO Contractor/RUIDP                          | All provision of safe working with proper signage has to be undertaken prior to work initiation, during the work and after the work.                 |

| Field                                  | Anticipated Impact                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Mitigation Measures                                                                                   | Responsible for Implementation/<br>Monitoring | Remark                                                                                                                                               |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | strictly that includes identification of hazards, the use of proper safety gear and disposal methods. |                                               |                                                                                                                                                      |
| Interventions in existing AC pipelines | <p>Possibilities of air borne asbestos if handled unsafely cut, drilled or broken into pieces that may cause:</p> <ul style="list-style-type: none"> <li><input type="checkbox"/> Inflammation of the lungs</li> <li><input type="checkbox"/> Mesothelioma</li> <li><input type="checkbox"/> Peritoneal mesothelioma</li> <li><input type="checkbox"/> Pleural plaques</li> <li><input type="checkbox"/> Asbestosis</li> <li><input type="checkbox"/> Bronchogenic Carcinoma</li> </ul> <p>Second hand-exposure</p> | Appropriate actions as defined in the Asbestos Management Plan will have to be adhered to             | DBO<br>Contractor/RUIDP                       | Measure to avoid the encounter & removal has to be prioritized and if the same is not avoided then the measures stated have to be strictly followed. |
| Documentation /record                  | Unmonitored ACM might be handled incorrectly and can cause release of airborne asbestos                                                                                                                                                                                                                                                                                                                                                                                                                             | To be formatted and kept as mentioned in the Asbestos Management Plan                                 | DBO<br>Contractor/RUIDP                       | To be kept intact for easy tracking and reference in legible format. The same can be kept in soft format as well.                                    |

\*\*\*\*\*

## **Appendix 22: Sample Outline Spoil Management Plan**

- The Spoil Management Plan should be site specific and be part of the monthly Construction Management Plan.
- The contractor, in consultation with the ULB, has to find out appropriate location/s for the disposal of the excess soil generated. The spoils should be deposited only at these sites.
- Further precautions need to be taken in case of the contaminated spoils.
- The vehicle carrying the spoil should be covered properly.
- The spoils generating from each site should be removed on the same day or immediately after the work is complete. The site / road should be restored to the original condition.

### **I. Spoils information**

The spoil information contains the details like a) The type/material, b) Potential contamination by that type, c) Expected volume (site/component specific), d) Spoil Classification etc.

### **II. Spoils management**

The Spoil Management section gives the details of a) Transportation of spoil b) disposal site details c) Precautions taken d) Volume of contaminated spoil, if present, d) Suggested reuse of disposal of the spoil

### **III. Documentation**

The volume of spoil generated (site specific, date wise), site disposed, reuse / disposal details should be documented properly.

## **Appendix 23: Sample Outline Traffic Management Plan**

### **A. Principles for TMP around the Water Pipes/Sewer Construction Sites**

1. One of the prime objectives of this TMP is to ensure the safety of all the road users along the work zone, and to address the following issues:
  - (i) the safety of pedestrians, bicyclists, and motorists travelling through the construction zone;
  - (ii) protection of work crews from hazards associated with moving traffic;
  - (iii) mitigation of the adverse impact on road capacity and delays to the road users;
  - (iv) maintenance of access to adjoining properties; and
  - (v) Addressing issues that may delay the project.

### **B. Operating Policies for TMP**

2. The following principles will help promote safe and efficient movement for all road users (motorists, bicyclists, and pedestrians, including persons with disabilities) through and around work zones while reasonably protecting workers and equipment.
  - (i) Make traffic safety and temporary traffic control an integral and high-priority element of project from planning through design, construction, and maintenance.
  - (ii) Inhibit traffic movement as little as possible.
  - (iii) Provide clear and positive guidance to drivers, bicyclists, and pedestrians as they approach and travel through the temporary traffic control zone.
  - (iv) Inspect traffic control elements routinely, both day and night, and make modifications when necessary.
  - (v) Pay increased attention to roadside safety in the vicinity of temporary traffic control zones.
  - (vi) Train all persons that select, place, and maintain temporary traffic control devices.
  - (vii) Keep the public well informed.
  - (viii) Make appropriate accommodation for abutting property owners, residents, businesses, emergency services, railroads, commercial vehicles, and transit operations.

3. **Figure A2 to Figure A12** illustrates the operating policy for TMP for the construction of water pipes and the sewers along various types of roads.

### **C. Analyze the impact due to street closure**


4. Apart from the capacity analysis, a final decision to close a particular street and divert the traffic should involve the following steps:
  - (i) approval from the ULB/Public Works Department (PWD) to use the local streets as detours;



- (ii) consultation with businesses, community members, traffic police, PWD, etc., regarding the mitigation measures necessary at the detours where the road is diverted during the construction;
- (iii) determining of the maximum number of days allowed for road closure, and incorporation of such provisions into the contract documents;
- (iv) determining if additional traffic control or temporary improvements are needed along the detour route;
- (v) considering how access will be provided to the worksite;
- (vi) contacting emergency service, school officials, and transit authorities to determine if there are impacts to their operations; and
- (vii) developing a notification program to the public so that the closure is not a surprise. As part of this program, the public should be advised of alternate routes that commuters can take or will have to take as result of the traffic diversion.

5. If full road-closure of certain streets within the area is not feasible due to inadequate capacity of the detour street or public opposition, the full closure can be restricted to weekends with the construction commencing on Saturday night and ending on Monday morning prior to the morning peak period.

**Figure A1: Policy Steps for the TMP**

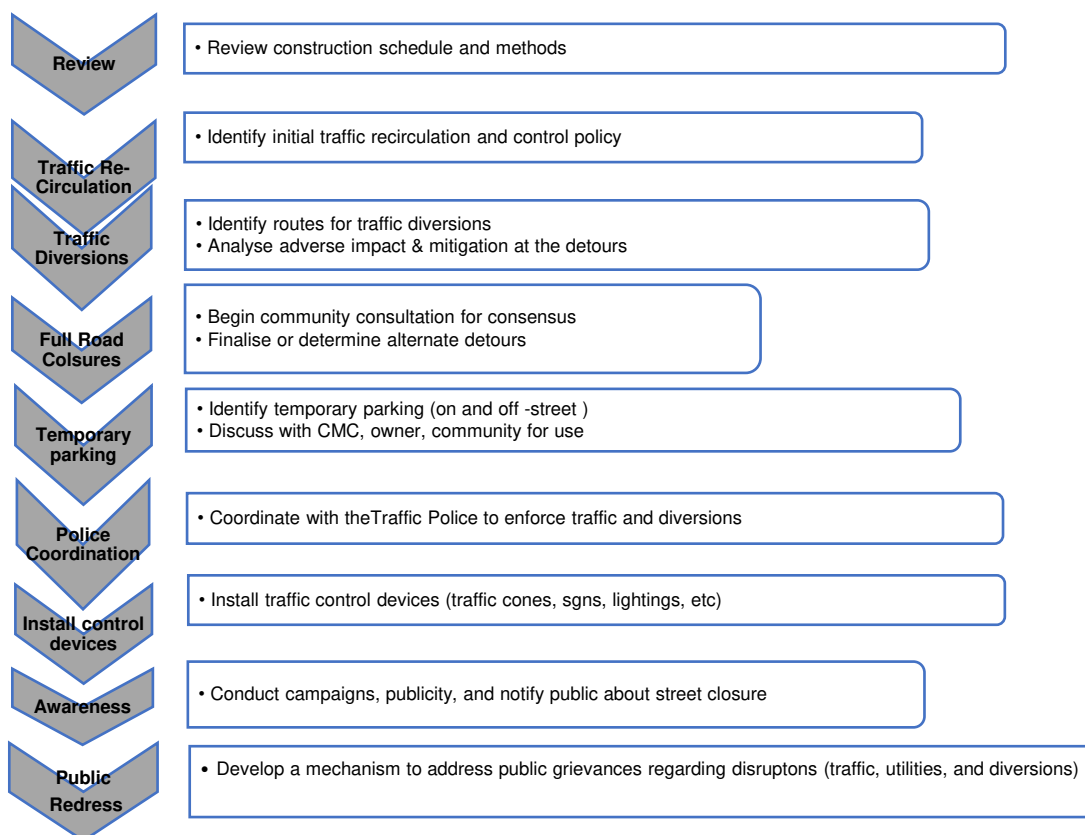

#### **D. Public awareness and notifications**

6. As per discussions in the previous sections, there will be travel delays during the constructions, as is the case with most construction projects, albeit on a reduced scale if utilities and traffic management are properly coordinated. There are additional grounds for travel delays in the area, as most of the streets lack sufficient capacity to accommodate additional traffic from diverted traffic as a result of street closures to accommodate the works.

6. The awareness campaign and the prior notification for the public will be a continuous activity which the project will carry out to compensate for the above delays and minimize public claims as result of these problems. These activities will take place sufficiently in advance of the time when the roadblocks or traffic diversions take place at the particular streets. The reason for this is to allow sufficient time for the public and residents to understand the changes to their travel plans. The project will notify the public about the roadblocks and traffic diversion through public notices, ward level meetings and city level meeting with the elected representatives.

7. The PIU will also conduct an awareness campaign to educate the public about the following issues:

- (i) Traffic control devices in place at the work zones (signs, traffic cones, barriers, etc.);
- (ii) Defensive driving behaviour along the work zones; and
- (iii) Reduced speeds enforced at the work zones and traffic diversions.

8. It may be necessary to conduct the awareness programs/campaigns on road safety during construction.

9. The campaign will cater to all types of target groups i.e. children, adults, and drivers. Therefore, these campaigns will be conducted in schools and community centres. In addition, the project will publish a brochure for public information. These brochures will be widely circulated around the area and will also be available at the PIU, and the contractor's site office. The text of the brochure should be concise to be effective, with a lot of graphics. It will serve the following purpose:

- (i) explain why the brochure was prepared, along with a brief description of the project;
- (ii) advise the public to expect the unexpected;
- (iii) educate the public about the various traffic control devices and safety measures adopted at the work zones;
- (iv) educate the public about the safe road user behaviour to emulate at the work zones;
- (v) tell the public how to stay informed or where to inquire about road safety issues at the work zones (name, telephone, mobile number of the contact person; and
- (vi) indicate the office hours of relevant offices.

#### **E. Install traffic control devices at the work zones and traffic diversion routes**

10. The purpose of installing traffic control devices at the work zones is to delineate these areas to warn, inform, and direct the road users about a hazard ahead, and to protect them as well as the workers. As proper delineation is a key to achieve the above objective, it is important to install good traffic signs at the work zones. The following traffic control devices are used in work zones:

- Signs
- Pavement Markings
- Channelizing Devices
- Arrow Panels
- Warning Lights

11. Procedures for installing traffic control devices at any work zone vary, depending on road configuration, location of the work, construction activity, duration, traffic speed and volume, and pedestrian traffic. Work will take place along major roads, and the minor internal roads. As such, the traffic volume and road geometry vary. The main roads carry considerable traffic; internal roads in the new city areas are wide but in old city roads very narrow and carry considerable traffic. However, regardless of where the construction takes place, all the work zones should be cordoned off, and traffic shifted away at least with traffic cones, barricades, and temporary signs (temporary “STOP” and “GO”).

12. **Figure A2 to Figure A12** illustrates a typical set-up for installing traffic control devices at the work zone of the area, depending on the location of work on the road way, and road geometrics:

- Work on shoulder or parking lane
- Shoulder or parking lane closed on divided road
- Work in Travel lane
- Lane closure on road with low volume
- Lane closure on a two-line road with low volume (with yield sign)
- Lane closure on a two-line road with low volume (one flagger operation)
- Lane closure on a two lane road (two flagger operation)
- Lane closure on a four lane undivided Road
- Lane closure on divided roadway
- Half road closure on multi-lane roadway
- Street closure with detour

13. The work zone should take into consideration the space required for a buffer zone between the workers and the traffic (lateral and longitudinal) and the transition space required for delineation, as applicable. For the works, a 30 cm clearance between the traffic and the temporary STOP and GO signs should be provided. In addition, at least 60 cm is necessary to install the temporary traffic signs and cones.

14. Traffic police should regulate traffic away from the work zone and enforce the traffic diversion result from full street closure in certain areas during construction. Flaggers/ personnel should be equipped with reflective jackets at all times and have traffic control batons (preferably the LED type) for regulating the traffic during night time.

16. In addition to the delineation devices, all the construction workers should wear fluorescent safety vests and helmets in order to be visible to the motorists at all times. There should be provision for lighting beacons and illumination for night constructions.

**Figure A2 & A3: Work on shoulder or parking lane & Shoulder or parking lane closed on divided road**

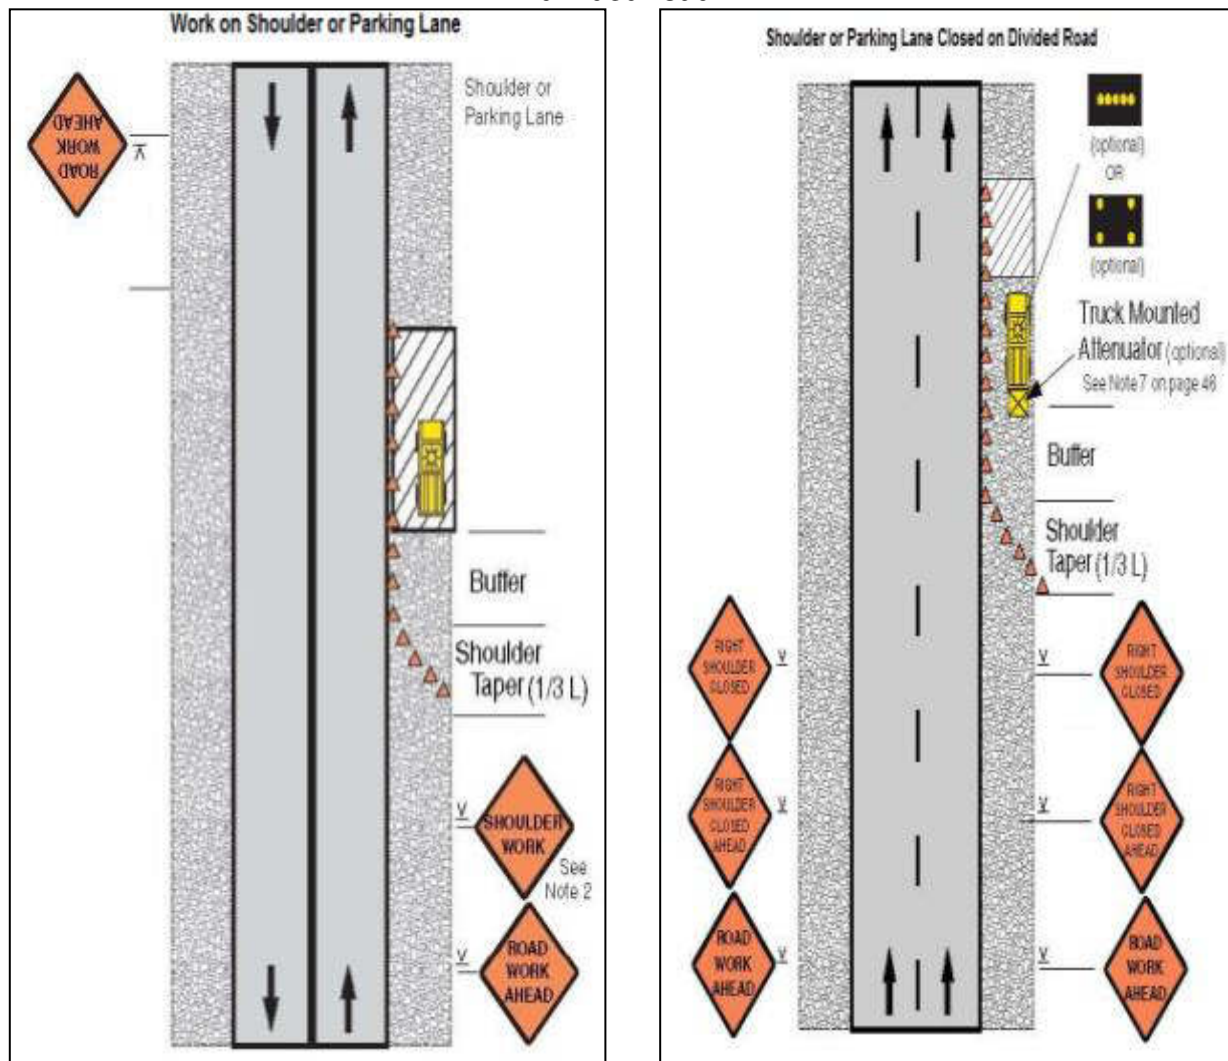


**Figure A4 & A5: Work in Travel lane & Lane closure on road with low volume**

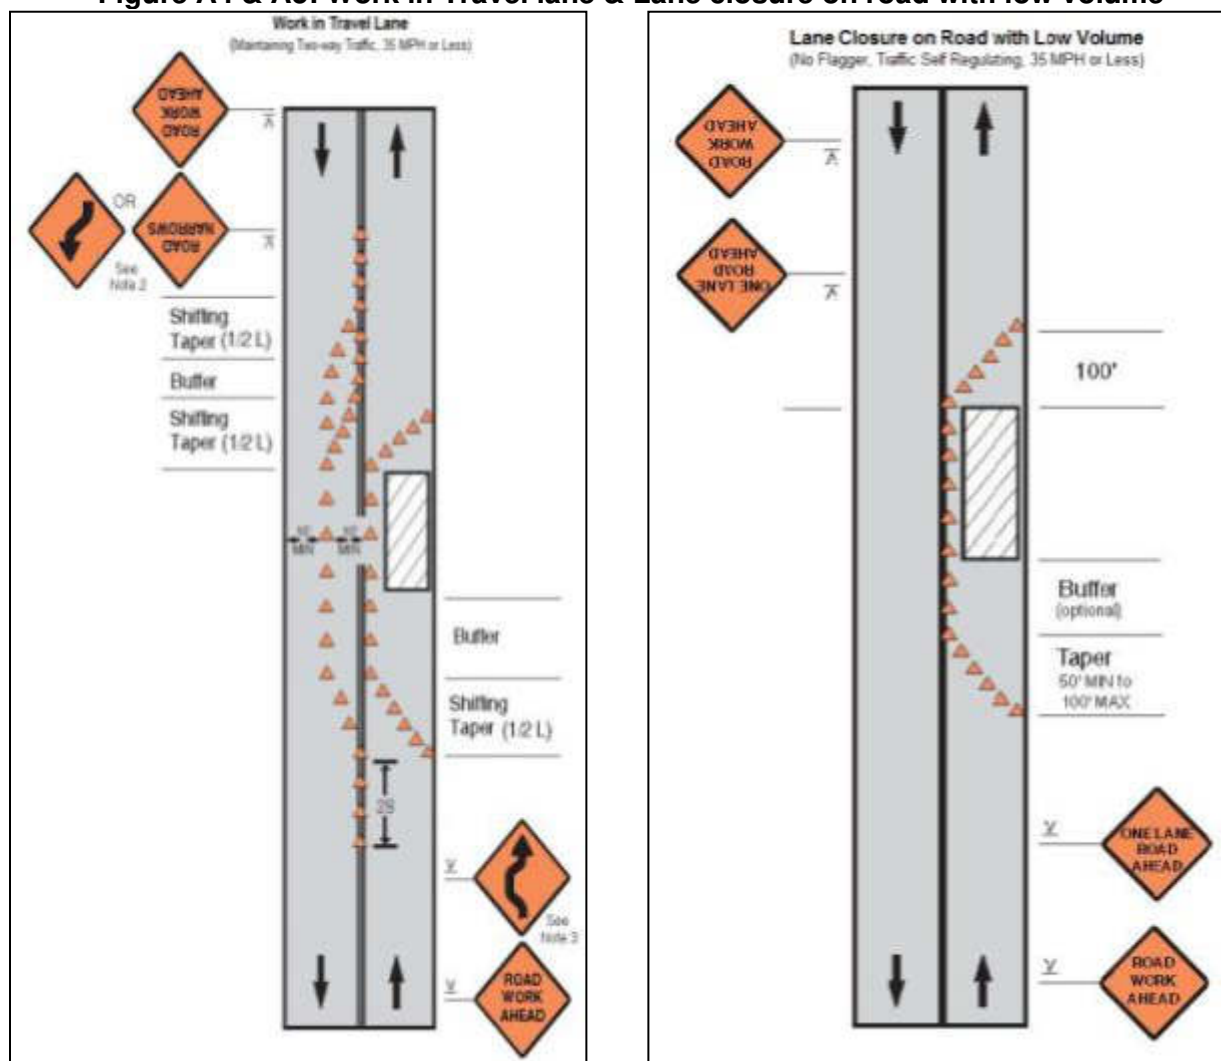


**Figure A6 & A7: Lane closure on a two-line road with low volume (with yield sign) & Lane closure on a two-line road with low volume (one flagger operation)**

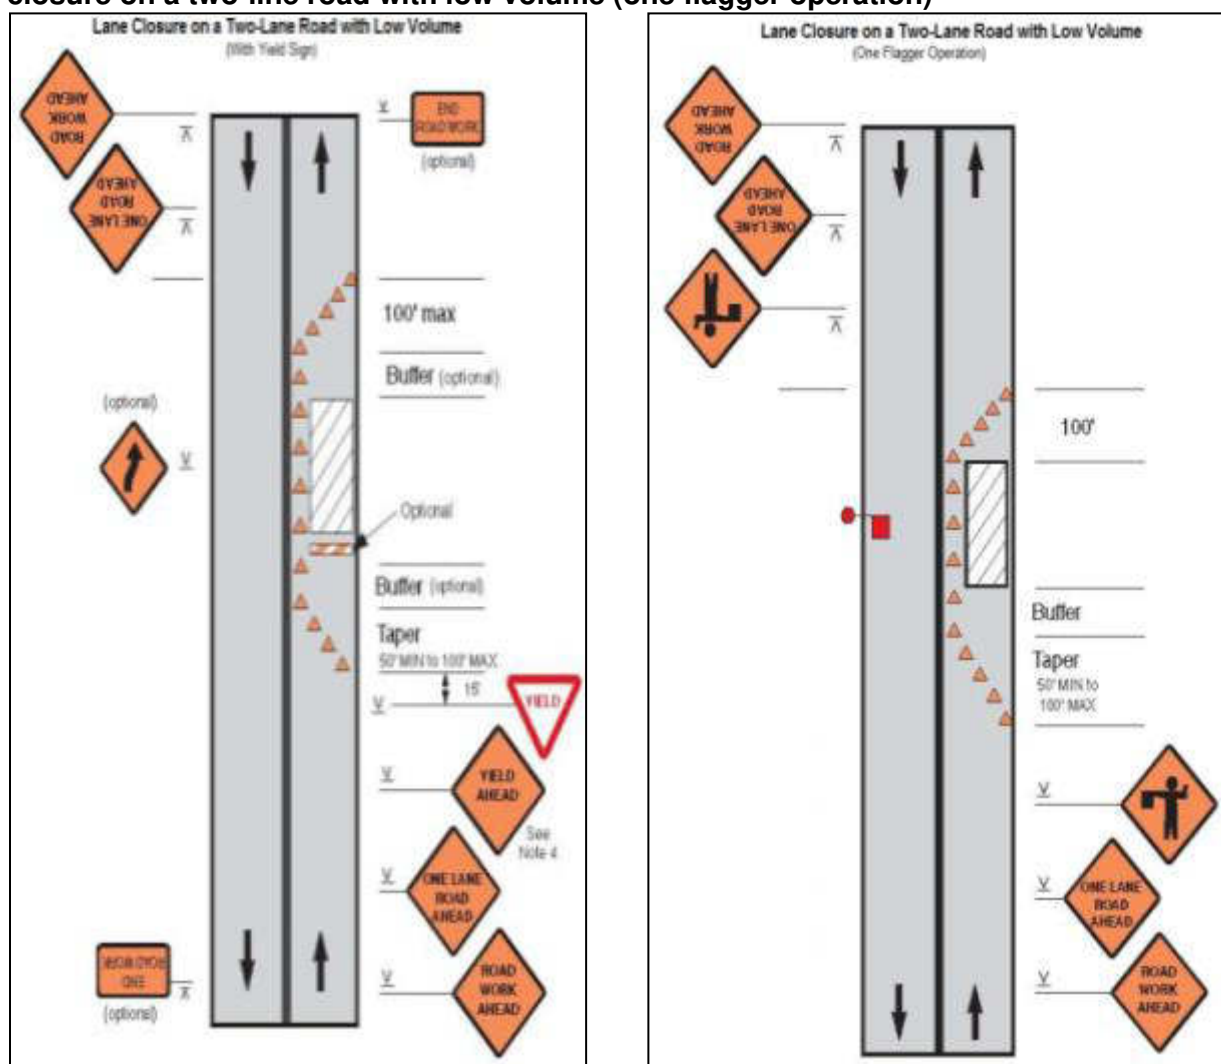


**Figure A8 & A9: Lane Closure on a Two-Lane Road (Two Flagger Operation) & Lane Closure on a Four-Lane Undivided Road**

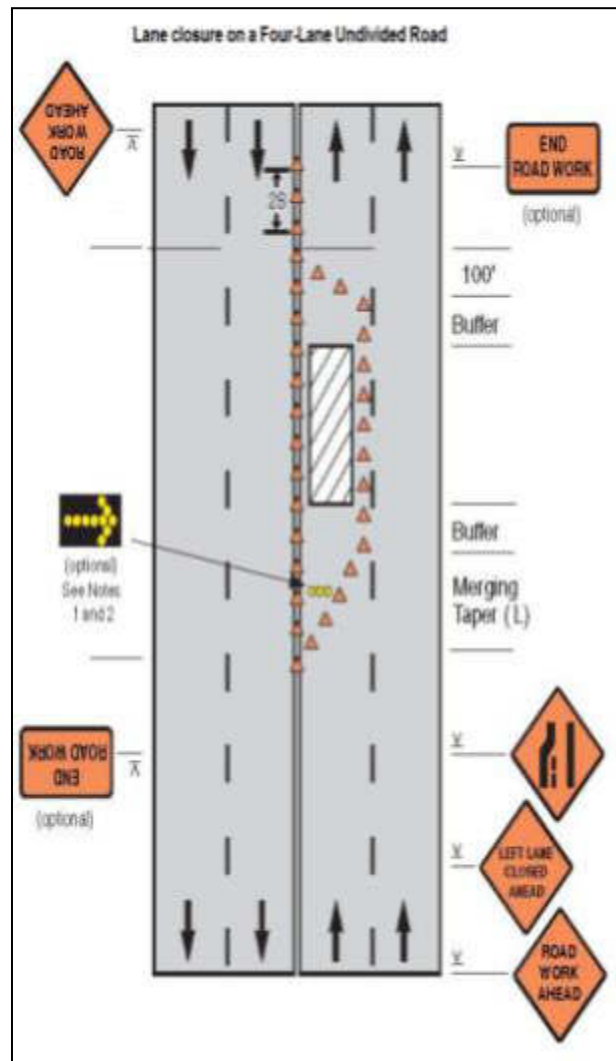
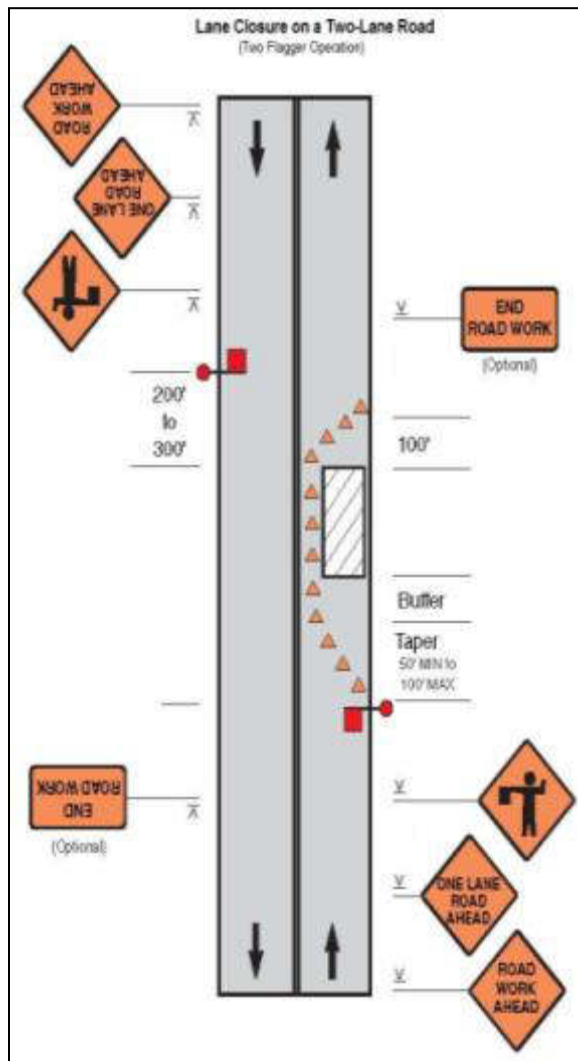




**Figure A10 & A11: Lane Closure On Divided Roadway & Half Road Closure On Multi-Lane Roadway**



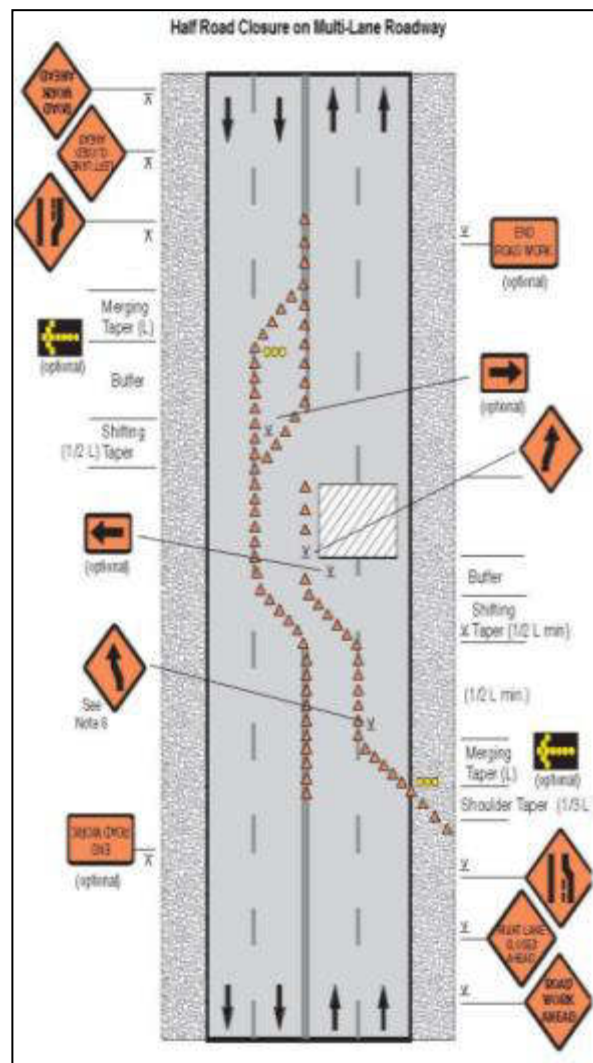




Figure A12: Street closure with detour

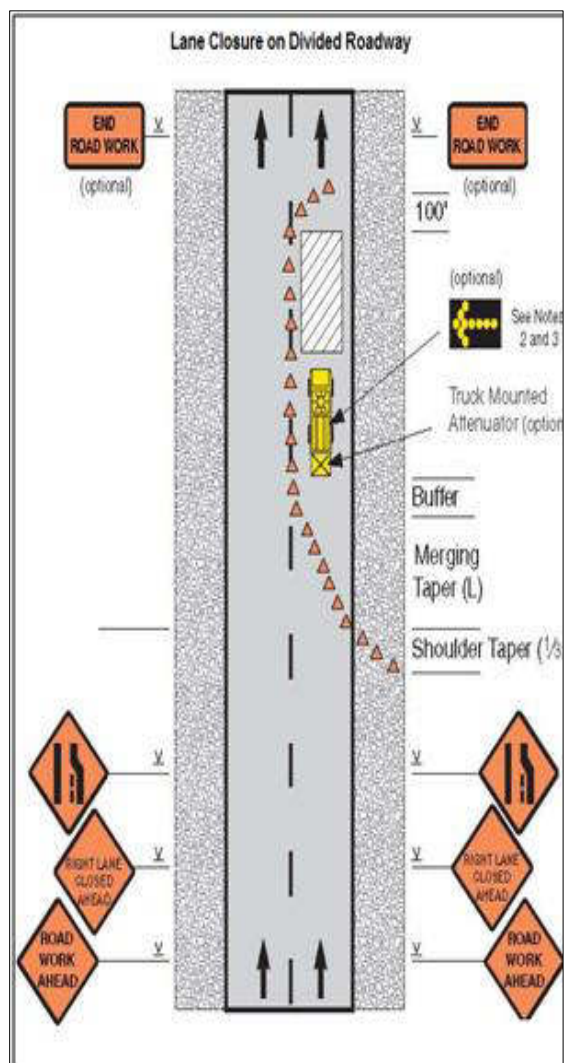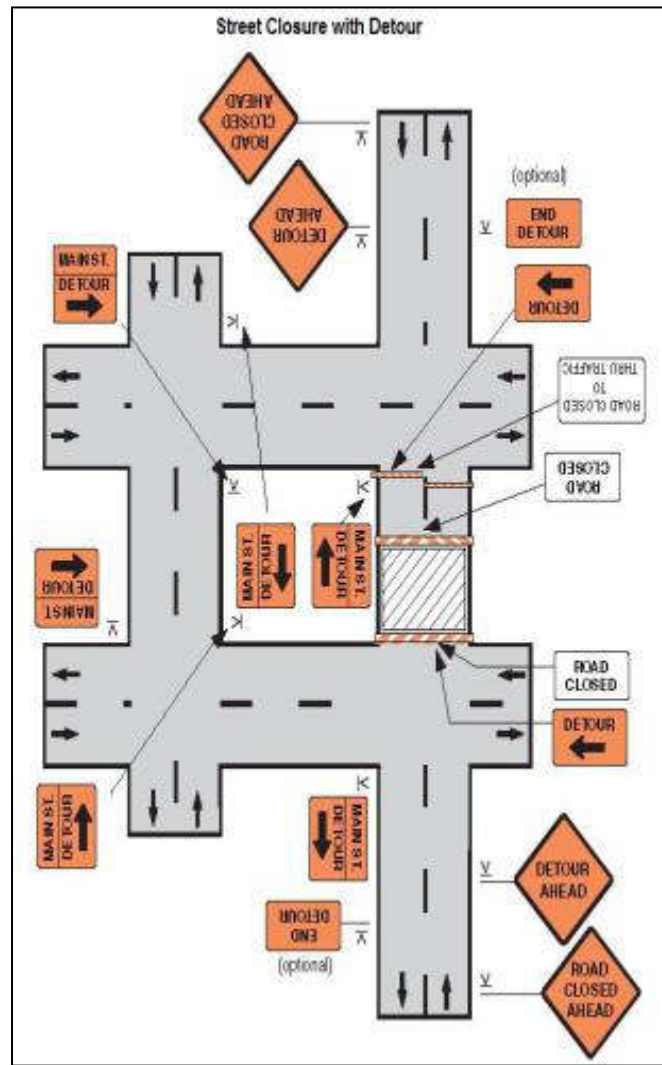

## Appendix 24: IFC benchmark standards for workers accommodation

August 2009

11

### PART II: STANDARDS FOR AND MANAGEMENT OF WORKERS' ACCOMMODATION

#### I. Standards for workers' accommodation

This section looks at the principles and standards applicable to the location and construction of workers' accommodation, including the transport systems provided, the general living facilities, rooms/dormitories facilities, sanitary facilities, canteen and cooking facilities, food safety, medical facilities and leisure/social facilities.

##### A. National/local standards

The key standards that need to be taken into consideration, as a baseline, are those contained in national/local regulations. Although it is quite unusual to find regulations specifically covering workers' accommodation, there may well be general construction standards which will be relevant. These may include the following standards:

- **Building construction:** for example, quality of material, construction methods, resistance to earthquakes.
- **Housing and public housing:** in some countries regulations for housing and public housing contain requirements on issues such as the basic amenities, and standards of repair.
- **General health, safety and security:** requirements on health and safety are often an important part of building standards and might include provisions on occupation density, minimal air volumes, ventilation, the quality of the flooring (slip-resistant) or security against intrusion.
- **Fire safety:** requirements on fire safety are common and are likely to apply to housing facilities of any type. This can include provision on fire extinguishers, fire alarms, number and size of staircases and emergency exits, restrictions on the use of certain building materials.
- **Electricity, plumbing, water and sanitation:** national design and construction standards often include very detailed provisions on electricity or plumbing fixtures/fittings, water and sanitation connection/equipment.

#### Benchmark

1. The relevant national and local regulations have been identified and implemented.

##### B. General living facilities

Ensuring good standards in living facilities is important in order to avoid safety hazards and to protect workers from diseases and/or illness resulting from humidity, bad/stagnant water (or lack of water), cold, spread of fungus, proliferation of insects or rodents, as well as to maintain a good level of morale. The location of the facilities is important to prevent exposure to wind, fire, flood and other natural hazards. It is also important that workers' accommodation is unaffected by the environmental or operational impacts of the worksite (for example noise, emissions or dust) but is sufficiently close that workers do not have to spend undue amounts of time travelling from their accommodation to the worksite. Living facilities should be built using adequate materials and should always be kept in good repair, clean and free from rubbish and other refuse.

#### Benchmarks

1. Living facilities are located to avoid flooding and other natural hazards.
2. Where possible, living facilities are located within a reasonable distance from the worksite.
3. Transport from the living facilities to worksite is safe and free.
4. The living facilities are built with adequate materials, kept in good repair and kept clean and free from rubbish and other refuse.

#### Drainage

The presence of stagnant water is a factor of proliferation of potential disease vectors such as mosquitoes, flies and others, and must be avoided.

#### Benchmarks

1. The building site is adequately drained to avoid the accumulation of stagnant water.

**Heating, air conditioning, ventilation and light**

Heating, air-conditioning and ventilation should be appropriate for the climatic conditions and provide workers with a comfortable and healthy environment to rest and spend their spare time.

**Benchmarks**

1. For facilities located in cold weather zones, the temperature is kept at a level of around 20 degrees Celsius notwithstanding the need for adequate ventilation.
2. For facilities located in hot weather zones, adequate ventilation and/or air conditioning systems are provided.
3. Both natural and artificial lighting are provided and maintained in living facilities. It is best practice that the window area represents not less than 5% to 10% of the floor area. Emergency lighting is provided.

**Water**

Special attention to water quality and quantity is absolutely essential. To prevent dehydration, water poisoning and diseases resulting from lack of hygiene, workers should always have easy access to a source of clean water. An adequate supply of potable water must be available in the same buildings where bedrooms or dormitories are provided. Drinking water must meet local or WHO drinking water standards<sup>7</sup> and water quality must be monitored regularly. Depending on the local context, it could either be produced by dedicated catchment and treatment facilities or tapped from existing municipal facilities if their capacity and quality are adequate.

**Benchmarks**

1. Access to an adequate and convenient supply of free potable water is always available to workers. Depending on climate, weather conditions and accommodation standards, 80 to 180 litres per person per day are available.
2. Drinking water meets national/local or WHO drinking water standards.<sup>8</sup>
3. All tanks used for the storage of drinking water are constructed and covered as to prevent water stored therein from becoming polluted or contaminated.

4. Drinking water quality is regularly monitored.

**Wastewater and solid waste**

Wastewater treatment and effluent discharge as well as solid waste treatment and disposal must comply with local or World Bank effluent discharge standards<sup>9</sup> and be adequately designed to prevent contamination of any water body, to ensure hygiene and to avoid the spread of infections and diseases, the proliferation of mosquitoes, flies, rodents, and other pest vectors. Depending on the local context, treatment and disposal services can be either provided by dedicated or existing municipal facilities.

**Benchmarks**

1. Wastewater, sewage, food and any other waste materials are adequately discharged, in compliance with local or World Bank standards – whichever is more stringent – and without causing any significant impacts on camp residents, the biophysical environment or surrounding communities.
2. Specific containers for rubbish collection are provided and emptied on a regular basis. Standards range from providing an adequate number of rubbish containers to providing leak proof, non-absorbent, rust and corrosion-resistant containers protected from insects and rodents. In addition it is best practice to locate rubbish containers 30 metres from each shelter on a wooden, metal, or concrete stand. Such containers must be emptied at regular intervals (to be determined based on temperatures and volumes generated) to avoid unpleasant odours associated with decaying organic materials.
3. Pest extermination, vector control and disinfection are carried out throughout the living facilities in compliance with local requirements and/or good practice. Where warranted, pest and vector monitoring should be performed on a regular basis.

7. [www.who.int/water\\_sanitation\\_health/dwa/en/](http://www.who.int/water_sanitation_health/dwa/en/)  
8. *Ibid*

9. As per the "Pollution Prevention and Abatement Handbook", World Bank Group, July 1998, available from [www.worldbank.org](http://www.worldbank.org)

### C. Room/dormitory facilities

The standards of the rooms or dormitory facilities are important to allow workers to rest properly and to maintain good standards of hygiene. Overcrowding should be avoided particularly. This also has an impact on workers' productivity and reduces work-related accidents. It is generally acknowledged that rooms/dormitories should be kept clean and in a good condition. Exposure to noise and odour should be minimised. In addition, room/dormitory design and equipment should strive to offer workers a maximum of privacy. Resorting to dormitories should be minimised and single or double rooms are preferred. Dormitories and rooms must be single-sex.

#### Benchmarks

1. Rooms/dormitories are kept in good condition.
2. Rooms/dormitories are aired and cleaned at regular intervals.
3. Rooms/dormitories are built with easily cleanable flooring material.
4. Sanitary facilities are located within the same buildings and provided separately for men and women.
5. Density standards are expressed either in terms of minimal volume per resident or of minimal floor space. Usual standards range from 10 to 12.5 cubic metres (volume) or 4 to 5.5 square metres (surface).
6. A minimum ceiling height of 2.10 metres is provided.
7. In collective rooms, which are minimised, in order to provide workers with some privacy, only a reasonable number of workers are allowed to share the same room. Standards range from 2 to 8 workers.
8. All doors and windows should be lockable, and provided with mosquito screens where conditions warrant.
9. There should be mobile partitions or curtains to ensure privacy.
10. Every resident is provided with adequate furniture such as a table, a chair, a mirror and a bedside light.
11. Separate sleeping areas are provided for men and women, except in family accommodation.

#### Additional issue

Irrespective of whether workers are supposed to keep their facilities clean, it is the responsibility of the accommodation manager to ensure that rooms/dormitories and sanitary facilities are in good condition.

#### Bed arrangements and storage facilities

The provision of an adequate numbers of beds of an appropriate size is essential to provide workers with decent, safe and hygienic conditions to rest and sleep. Here again, particular attention should be paid to privacy. Consideration should be given to local customs so beds could be replaced by hammocks or sleeping mats for instance.

#### Benchmarks

1. A separate bed for each worker is provided. The practice of "hot-bedding" should be avoided.
2. There is a minimum space between beds of 1 metre.
3. Double deck bunks are not advisable for fire safety and hygiene reasons, and their use is minimised. Where they are used, there must be enough clear space between the lower and upper bunk of the bed. Standards range from 0.7 to 1.10 metres.
4. Triple deck bunks are prohibited.
5. Each worker is provided with a comfortable mattress, pillow, cover and clean bedding.
6. Bed linen is washed frequently and applied with repellents and disinfectants where conditions warrant (malaria).
7. Facilities for the storage of personal belongings for workers are provided. Standards vary from providing an individual cupboard for each worker to providing 475-litre big lockers and 1 metre of shelf unit.
8. Separate storage for work boots and other personal protection equipment, as well as drying/airing areas may need to be provided depending on conditions.

# Initial Environmental Examination

---

Document Stage: Updated  
Project Number: 42267-031  
August 2021

India: Rajasthan Secondary Towns Development  
Sector Project – Sardarshahar Water Supply and  
Sewerage Subproject, District - Churu, Rajasthan

Part 3 of 3 (pages 352-446)

Prepared by Project Management Unit, Rajasthan Urban Drinking Water Sewerage and Infrastructure Corporation Limited, Government of Rajasthan for the Asian Development Bank. This is an updated version of the draft originally posted in March 2020 available on <https://www.adb.org/projects/documents/ind-42267-031-iee-3>.

This updated initial environmental examination report is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, management, or staff, and may be preliminary in nature. Your attention is directed to the “terms of use” section on ADB’s website.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

## D. Sanitary and toilet facilities

It is essential to allow workers to maintain a good standard of personal hygiene but also to prevent contamination and the spread of diseases which result from inadequate sanitary facilities. Sanitary and toilet facilities will always include all of the following: toilets, urinals, washbasins and showers. Sanitary and toilet facilities should be kept in a clean and fully working condition. Facilities should also be constructed of materials that are easily cleanable and ensure privacy. Sanitary and toilet facilities are never shared between male and female residents, except in family accommodation. Where necessary, specific additional sanitary facilities are provided for women.

### Benchmarks

1. Sanitary and toilet facilities are constructed of materials that are easily cleanable.
2. Sanitary and toilet facilities are cleaned frequently and kept in working condition.
3. Sanitary and toilet facilities are designed to provide workers with adequate privacy, including ceiling to floor partitions and lockable doors.
4. Sanitary and toilet facilities are not shared between men and women, except in family accommodation.

### Toilet facilities

Toilet arrangements are essential to avoid any contamination and prevent the spread of infectious disease.

### Benchmarks

1. An adequate number of toilets is provided to workers. Standards range from 1 unit to 15 persons to 1 unit per 6 persons. For urinals, usual standards are 1 unit to 15 persons.
2. Toilet facilities are conveniently located and easily accessible. Standards range from 30 to 60 metres from rooms/dormitories. Toilet rooms shall be located so as to be accessible without any individual passing through any sleeping room. In addition, all toilet rooms should be well-lit, have good ventilation or external windows, have sufficient hand wash basins and be conveniently located. Toilets and other sanitary facilities should be ("must be" in cold climates) in the same building as rooms and dormitories.

### Showers/bathrooms and other sanitary facilities

Hand wash basins and showers should be provided in conjunction with rooms/dormitories. These facilities must be kept in good working condition and cleaned frequently. The flooring for shower facilities should be of hard washable materials, damp-proof and properly drained. Adequate space must be provided for hanging, drying and airing clothes. Suitable light, ventilation and soap should be provided. Lastly, hand washing, shower and other sanitary facilities should be located within a reasonable distance from other facilities and from sleeping facilities in particular.

### Benchmarks

1. Shower/bathroom flooring is made of anti-slip hard washable materials.
2. An adequate number of handwash facilities is provided to workers. Standards range from 1 unit to each 15 persons to 1 unit per 6 workers. Handwash facilities should consist of a tap and a basin, soap and hygienic means of drying hands.
3. An adequate number of shower/bathroom facilities is provided to workers. Standards range from 1 unit to 15 persons to 1 unit per 6 persons.
4. Showers/bathrooms are conveniently located.
5. Shower/bathroom facilities are provided with an adequate supply of cold and hot running water.

## E. Canteen, cooking and laundry facilities

Good standards of hygiene in canteen/dining halls and cooking facilities are crucial. Adequate canteen, cooking and laundry facilities and equipments should also be provided. When caterers are contracted to manage kitchens and canteens, special attention should be paid to ensure that contractors take into account and implement the benchmarks below, and that adequate reporting and monitoring mechanisms are in place. When workers can individually cook their meals, they should be provided with a space separate from the sleeping areas. Facilities must be kept in a clean and sanitary condition. In addition, canteen, kitchen, cooking and laundry floors, ceilings and walls should be made of easily cleanable materials.

### Benchmarks

1. Canteen, cooking and laundry facilities are built in adequate and easy to clean materials.
2. Canteen, cooking and laundry facilities are kept in a clean and sanitary condition.
3. If workers can cook their own meals, kitchen space is provided separate from sleeping areas.

### Laundry facilities

Providing facilities for workers to wash both work and non-work related clothes is essential for personal hygiene. The alternative is for the employer to provide a free laundry service.

### Benchmarks

1. Adequate facilities for washing and drying clothes are provided. Standards range from providing sinks or tubs with hot and cold water, cleaning soap and drying lines to providing washing machines and dryers.
2. When work clothes are used in contact with dangerous substance (for example, application of pesticide), special laundry facilities (washing machines) should be provided.

### Additional issue

When workers are provided with facilities allowing them to individually do their laundry or cooking, it should be the responsibility of each worker to keep the facilities in a clean and sanitary condition. Nonetheless, it is the responsibility of the accommodation manager to make sure the standards are respected and to provide an adequate cleaning, disinfection and pest/vector control service when necessary.

### Additional issue

When the employer provides family accommodation, it is best practice to provide each family with a private kitchen or the necessary cooking equipment to allow the family to cook on their own.

### Canteen and cooking facilities

Canteen and cooking facilities should provide sufficient space for preparing food and eating, as well as conform to hygiene and safety requirements.

### Benchmarks

1. Canteens have a reasonable amount of space per worker. Standards range from 1 square metre to 1.5 square metres.
2. Canteens are adequately furnished. Standards range from providing tables, benches, individual drinking cups and plates to providing special drinking fountains.
3. Places for food preparation are designed to permit good food hygiene practices, including protection against contamination between and during food preparation.
4. Kitchens are provided with facilities to maintain adequate personal hygiene including a sufficient number of washbasins designated for cleaning hands with clean, running water and materials for hygienic drying.
5. Wall surfaces adjacent to cooking areas are made of fire-resistant materials. Food preparation tables are also equipped with a smooth durable washable surface. Lastly, in order to enable easy cleaning, it is good practice that stoves are not sealed against a wall, benches and fixtures are not built into the floor, and all cupboards and other fixtures and all walls and ceilings have a smooth durable washable surface.
6. All kitchen floors, ceiling and wall surfaces adjacent to or above food preparation and cooking areas are built using durable, non-absorbent, easily cleanable, non-toxic materials.
7. Wall surfaces adjacent to cooking areas are made of fire-resistant materials. Food preparation tables are equipped with a smooth, durable, easily cleanable, non-corrosive surface made of non-toxic materials. Lastly, in order to enable easy cleaning, it is good practice that stoves are not sealed against a wall, benches and fixtures are not built into the floor, and all cupboards and other fixtures have a smooth, durable and washable surface.
8. Adequate facilities for cleaning, disinfecting and storage of cooking utensils and equipment are provided.
9. Food waste and other refuse are to be adequately deposited in sealable containers and removed from the kitchen frequently to avoid accumulation.



## F. Standards for nutrition and food safety

When cooking for a number of workers, hygiene and food safety are absolutely critical. In addition to providing safe food, providing nutritious food is important as it has a very direct impact on workers' productivity and well-being. An ILO study demonstrates that good nutrition at work leads to gains in productivity and worker morale, prevention of accidents and premature deaths and reductions in health care costs.<sup>10</sup>

### Benchmarks

1. The WHO 5 keys to safer food or an equivalent process is implemented (see Box 6 below).
2. Food provided to workers contains an appropriate level of nutritional value and takes into account religious/cultural backgrounds; different choices of food are served if workers have different cultural/religious backgrounds.
3. Food is prepared by cooks. It is also best practice that meals are planned by a trained nutritionist.

#### Box 6 - Five keys to safer food

##### Keep clean

Wash your hands before handling food and often during food preparation.  
Wash your hands after going to the toilet.  
Wash and sanitise all surfaces and equipment used for food preparation.  
Protect kitchen areas and food from insects, pests and other animals.

While most micro organisms do not cause disease, dangerous micro organisms are widely found in soil, water, animals and people. These micro organisms are carried on hands, wiping cloths and utensils, especially cutting boards and the slightest contact can transfer them to food and cause food borne diseases.

##### Separate raw and cooked

Separate raw meat, poultry and seafood from other foods.  
Use separate equipment and utensils such as knives and cutting boards for handling raw foods.  
Store food in containers to avoid contact between raw and prepared foods.

Raw food, especially meat, poultry and seafood, and their juices, can contain dangerous micro organisms which may be transferred onto other foods during food preparation and storage.

##### Cook thoroughly

Cook food thoroughly, especially meat, poultry, eggs and seafood.  
Bring foods like soups and stews to boiling to make sure that they have reached 70°C. For meat and poultry, make sure that juices are clear, not pink. Ideally, use a thermometer.  
Reheat cooked food thoroughly.

Proper cooking kills almost all dangerous micro organisms. Studies have shown that cooking food to a temperature of 70°C can help ensure it is safe for consumption. Foods that require special attention include minced meats, rolled roasts, large joints of meat and whole poultry.

##### Keep food at safe temperatures

Do not leave cooked food at room temperature for more than 2 hours.  
Refrigerate promptly all cooked and perishable food (preferably below 5°C).  
Keep cooked food piping hot (more than 60°C) prior to serving.  
Do not store food too long even in the refrigerator.  
Do not thaw frozen food at room temperature.

Micro organisms can multiply very quickly if food is stored at room temperature. By holding at temperatures below 5°C or above 60°C, the growth of micro organisms is slowed down or stopped. Some dangerous micro organisms still grow below 5°C.

##### Use safe water and raw materials

Use safe water or treat it to make it safe.  
Select fresh and wholesome foods.  
Choose foods processed for safety, such as pasteurised milk.  
Wash fruits and vegetables, especially if eaten raw.  
Do not use food beyond its expiry date.

Raw materials, including water and ice, may be contaminated with dangerous micro organisms and chemicals. Toxic chemicals may be formed in damaged and mouldy foods. Take care in selection of raw materials and implement simple measures such as washing.

**Source:** World Health Organization, Food Safety  
[www.who.int/foodsafety/publications/consumer/en/5keys\\_en.pdf](http://www.who.int/foodsafety/publications/consumer/en/5keys_en.pdf)

10. C. Wanjek (2005), "Food at Work - Workplace solutions for malnutrition, obesity and chronic disease", International Labour Organization, Geneva.

## G. Medical facilities

Access to adequate medical facilities is important to maintain workers' health and to provide adequate responses in case of health emergency situations. The availability or level of medical facilities provided in workers' accommodation is likely to depend on the number of workers living on site, the medical facilities already existing in the neighbouring communities and the availability of transport. However, first aid must always be available on site.

### First aid facilities

Providing adequate first aid training and facilities can save lives and prevent minor injuries becoming major ones.

### Other medical facilities

Depending on the number of workers living on site and the medical services offered in the surrounding communities, it is important to provide workers with additional medical facilities. Special facilities for sick workers and medical services such as dental care, surgery, a dedicated emergency room can, for instance, be provided.

### Benchmarks

1. A number of first aid kits adequate to the number of residents are available.
2. First aid kits are adequately stocked. Where possible a 24/7 first aid service/facility is available.
3. An adequate number of staff/workers is trained to provide first aid.
4. Where possible and depending on the medical infrastructures existing in the community, other medical facilities are provided (nurse rooms, dental care, minor surgery).

### Box 7 - UK/HSE First Aid facilities

#### What should be in a first aid kit?

There is no standard list and it very much depends on the assessment of the needs in a particular workplace:

- a leaflet giving general guidance on first aid, for example HSE leaflet *Basic advice on first aid at work*
- individually wrapped sterile adhesive dressings (assorted sizes)
- two sterile eye pads
- four individually wrapped triangular bandages (preferably sterile)
- six safety pins
- six medium-sized (approximately 12 cm x 12 cm) individually wrapped sterile unmedicated wound dressings
- two large (approximately 18 cm x 18 cm) sterile individually wrapped unmedicated wound dressings
- one pair of disposable gloves.

#### What should be kept in the first aid room?

The room should contain essential first aid facilities and equipment. Typical examples of these are:

- a sink with hot and cold running water
- drinking water and disposable cups
- soap and paper towels
- a store for first aid materials
- foot-operated refuse containers, lined with disposable yellow clinical waste bags or a container for the safe disposal of clinical waste
- a couch with waterproof protection, clean pillows and blankets
- a chair
- a telephone or other communication equipment
- a record book for recording incidents where first aid has been given.

Source: UK Health and Safety Executive

## H. Leisure, social and telecommunication facilities

Basic leisure and social facilities are important for workers to rest and also to socialise during their free time. This is particularly true where workers' accommodation is located in remote areas far from any communities. Where workers' accommodation is located in the vicinity of a village or a town, existing leisure or social facilities can be used so long as this does not cause disruption to the access and enjoyment of local community members. But in any case, social spaces should also be provided on site. Exercise and recreational facilities will increase workers' welfare and reduce the impact of the presence of workers in the surrounding communities. In addition it is also important to provide workers with adequate means to communicate with the outside world, especially when workers' accommodation is located in a remote location or where workers live on site without their family or are migrants. Consideration of cultural attitudes is important. Provision of space for religious observance needs to be considered, taking account of the local context and potential conflicts in certain situations.

### Benchmarks

1. Basic collective social/rest spaces are provided to workers. Standards range from providing workers multi-purpose halls to providing designated areas for radio, TV, cinema.
2. Recreational facilities are provided. Standards range from providing exercise equipment to providing a library, swimming pool, tennis courts, table tennis, educational facilities.
3. Workers are provided with dedicated places for religious observance if the context warrants.
4. Workers have access to public phones at affordable/public prices (that is, not inflated).
5. Internet facilities can also be provided, particularly where large numbers of expatriates/Third Country Nationals (TCNs) are accommodated.

### Box 8 - Examples of social/leisure facilities

In Qatar there is a newly built 170-hectare complex which accommodates contractors and more than 35,000 workers for a project run by a major oil company. At the heart of this complex, the recreation area includes extensive sport facilities, a safety-training centre, an outdoor cinema and a park. The purpose of those facilities goes beyond providing adequate accommodation to the large numbers of contractors and workers on this project but is designed to provide the same level of services as a small town. The accommodation complex has a mayor, as well as a dedicated welfare team which is responsible for the workers' welfare, cultural festivals and also acts as the community's advocates.

## II. Managing workers' accommodation

Once the living facilities have been constructed and are operational, effective ongoing management of living facilities is essential. This encompasses issues such as the physical maintenance of buildings, security and consultation with residents and neighbouring communities in order to ensure the implementation of the housing standards in the long term.

### A. Management and staff

Worker camps and housing facilities should have a written management plan, including management policies or plans on health and safety, security, living conditions, workers' rights and representation, relationships with the communities and grievance processes. Part of those policies and plans can take the form of codes of conduct. The quality of the staff managing and maintaining the accommodation facilities will have a decisive impact on the level of standards which are implemented and the well-being of workers (for instance on the food safety or overall hygiene standards). It is therefore important to ensure that managers are competent and other workers are adequately skilled. The manager will be responsible for overseeing staff, for ensuring the implementation of the accommodation standards and for the implementation of the management plans. It is important the accommodation manager has the corresponding authority to do so.

If the facility is being managed by a contractor, as is often the case, the expected housing and management standards should be specified in the relevant contract, and mechanisms to ensure that those standards are implemented should be set up. As part of this process, the accommodation manager (or contractor) should have a duty to monitor the application of the accommodation standards and to report frequently on their implementation to the client.

#### Benchmarks

1. There are management plans and policies especially in the field of health and safety (with emergency responses), security, workers' rights, relationships with the communities.
2. An appointed person with the adequate background and experience is in charge of managing the workers' accommodation.
3. If contractors are being used, there are clear contractual management responsibilities and monitoring and reporting requirements.
4. Depending on the size of the accommodation, there is a sufficient number of staff in charge of cleaning, cooking and of general maintenance.
5. Such staff are recruited from the local communities.
6. Staff have received basic health and safety training.
7. Persons in charge of the kitchen are trained in nutrition and food-handling and adequately supervised.

#### B. Charging fees for accommodation and services

Charging fees for the accommodation or the services provided to workers such as food or transport should be avoided where workers do not have the choice to live or eat anywhere else, or if deemed unavoidable, should take into account the specific nature of workers' accommodation. Any charges should be transparent, discussed during recruitment and specified in workers' contracts. Any such charges should still leave workers with sufficient income and should never lead to a worker becoming indebted to an employer.

#### Benchmarks

1. When fees are charged, workers are provided with clear information and a detailed description of all payments made such as rent, deposit and other fees.
2. When company housing is considered to be part of workers' wages, it is best practice that workers are provided with an employment contract clearly specifying housing arrangements and regulations, in particular rules concerning payments and fees, facilities and services offered and rules of notice.
3. When fees are charged, the renting arrangements are fair and do not cost the worker more than a small proportion of income and never include a speculative profit.
4. Food and other services are free or are reasonably priced, never above the local market price.
5. The provision of accommodation or other services by employers as a payment for work is prohibited.

#### Additional issue

To avoid that fair renting arrangements turn into unfair ones, any deposit of advance should be set at a reasonable level and it is best practice that renting prices include a fixed fee covering the water needed and the use of the energy required to the functioning of the heating/cooling/ventilation/cooking systems. However, in such cases it might be necessary to raise workers' awareness to ensure that workers will use the facilities responsibly, particularly in areas where water is scarce.

#### C. Health and safety on site

The company or body in charge of managing the workers' accommodation should have the prime responsibility for ensuring workers' physical well-being and integrity. This involves making sure that the facilities are kept in good condition (ensuring that sanitary standards or fire regulations are respected for instance) and that adequate health and safety plans and standards are designed and implemented.

### Benchmarks

1. Health and safety management plans including electrical, mechanical, structural and food safety have been carefully designed and are implemented.
2. The person in charge of managing the accommodation has a specific duty to report to the health authorities the outbreak of any contagious diseases, food poisoning and other important casualties.
3. An adequate number of staff/workers is trained to provide first aid.
4. A specific fire safety plan is prepared, including training of fire wardens, periodic testing and monitoring of fire safety equipment and periodic drills.
5. Guidance on the detrimental effects of the abuse of alcohol and drugs and other potentially harmful substances and the risk and concerns relating to HIV/AIDS and of other health risk-related activities is provided to workers. It is best practice to develop a clear policy on this issue.
6. Workers have access to adequate preventive measures such as contraception (condoms in particular) and mosquito nets.
7. Workers have easy access to medical facilities and medical staff. Where possible, female doctors/nurses should be available for female workers.
8. Emergency plans on health and fire safety are prepared. Depending on the local context, additional emergency plans are prepared as needed to handle specific occurrences (earthquakes, floods, tornadoes).

### D. Security of workers' accommodation

Ensuring the security of workers and their property on the accommodation site is of key importance. To this end, a security plan must be carefully designed including appropriate measures to protect workers against theft and attacks. Policies regarding the use of force (force can only be used for preventive and defensive purposes in proportion to the nature and the extent of the threat) should also be

carefully designed. To implement those plans, it may be necessary to contract security services or to recruit one or several staff whose main responsibility is to provide security to safeguard workers and property. Before making any security arrangements, it is necessary to assess the risks of such arrangements to those within and outside the workers' accommodation and to respect best international practices, including IFC PS4 and EBRD PR4 and applicable law.<sup>11</sup> Particular attention should be paid to the safety and security of women workers.

### Benchmarks

1. A security plan including clear measures to protect workers against theft and attack is implemented.
2. A security plan including clear policies on the use of force has been carefully designed and is implemented.
3. Security staff have been checked to ensure that they have not been implicated in any previous crimes or abuses. Where appropriate, security staff from both genders are recruited.
4. Security staff have a clear mandate and have received clear instruction about their duties and responsibilities, in particular their duties not to harass, intimidate, discipline or discriminate against workers.
5. Security staff have received adequate training in dealing with domestic violence and the use of force.
6. Security staff have a good understanding about the importance of respecting workers' rights and the rights of the communities.
7. Body searches are only allowed in specific circumstances and are performed by specially trained security staff using the least-intrusive means possible. Pat down searches on female workers can only be performed by female security staff.
8. Security staff adopt an appropriate conduct towards workers and communities.
9. Workers and members of the surrounding communities have specific means to raise concerns about security arrangement and staff.

11. See for instance the Voluntary Principles on Security and Human Rights. [www.voluntaryprinciples.org/principles](http://www.voluntaryprinciples.org/principles)

### E. Workers' rights, rules and regulations on workers' accommodation

Freedoms and human rights of workers should be recognised and respected within their living quarters just as within the working environment. House rules and regulations should be reasonable and non discriminatory. It is best practice that workers' representatives are consulted about those rules. House rules and regulations should not prevent workers from exercising their basic rights. In particular, workers' freedom of movement needs to be preserved if they are not to become effectively "trapped". To this end it is good practice to provide workers with 24/7 access to the accommodation and free transport services to and from the surrounding communities. Any restriction to this freedom of movement should be limited and duly justified. Penalties for breaking the rules should be proportional and implemented through a proper procedure allowing workers to defend themselves and to challenge the decision taken. The relationship between continuing employment and compliance with the rules of the workers' accommodation should be clear and particular attention should be paid to ensure that housing rules do not create indirect limitation of the right to freedom of association. Best practice might include a code of conduct relating to the accommodation to be signed together with the contract of employment.

#### Box 9 - Dole housing plantation regulation in Costa Rica

In every plantation there is an internal accommodation regulation that every worker is required to sign together with his/her employment contract. That document describes the behaviour which is expected from workers at all times and basic rules such as the prohibition of alcohol and the interdiction to make noise after a certain time at night. In case there is any problem concerning the application of those internal rules, a set of disciplinary procedures which have been designed with the workers' representatives can be enforced. Workers are absolutely free to enter or leave the site and do not have any restrictions in relation to accessing their living quarters. Families are not allowed in the living quarters unless they have been registered for a visit.

### Benchmarks

1. Restriction of workers' freedom of movement to and from the site is limited and duly justified. It is good practice to provide workers 24/7 access to the accommodation site. Any restrictions based on security reasons should be balanced by the necessity to respect workers' freedom of movement.
2. Where possible, an adequate transport system to surrounding communities is provided. It is good practice to provide workers with free transportation to and from local communities.
3. Withholding workers' ID papers is prohibited.
4. Freedom of association is expressly respected. Provisions restricting workers' rights on site should take into account the direct and indirect effect on workers' freedom of association. It is best practice to provide trade union representatives access to workers in the accommodation site.
5. Workers' gender and religious, cultural and social backgrounds are respected. In particular, workers should be provided with the possibility of celebrating religious holidays and observances.
6. Workers are made aware of their rights and obligations and are provided with a copy of the internal workers' accommodation rules, procedures and sanction mechanisms in a language or through a media which they understand.
7. Housing regulations, including those relating to allocation of housing, should be non-discriminatory. Any justifiable discriminatory rules – for example all-male dormitories – should be strictly limited to the rules which are necessary to ensure the smooth running of the worker camp and to maintain a good relationship with the surrounding communities.
8. Where possible, visitor access should be allowed.
9. Decisions should be made on whether to prohibit alcohol, tobacco and third party access or not from the camp and the relevant rules should be clearly communicated to all residents and workers.
10. A fair and non-discriminatory procedure exists to implement disciplinary procedures including the right of workers to defend themselves (see also next section).



## F. Consultation and grievance mechanisms

All residents should be made aware of any rules governing the accommodation and the consequences of breaking such rules. Processes that allow for consultation between site management and the resident workers will assist in the smooth running of an accommodation site. These may include a dormitory or camp committee as well as formal processes that allow workers to lodge any grievances about their accommodation.

### Benchmarks

1. Mechanisms for workers' consultation have been designed and implemented. It is best practice to set up a review committee which includes representatives elected by workers.
2. Processes and mechanisms for workers to articulate their grievances are provided to workers. Such mechanisms are in accordance with PS2/PR2.
3. Workers subjected to disciplinary proceedings arising from behaviour in the accommodation should have access to a fair and transparent hearing with the possibility to contest decisions and refer the dispute to independent arbitration or relevant public authorities.
4. In case conflicts between workers themselves or between workers and staff break out, workers have the possibility of easily accessing a fair conflict resolution mechanism.
5. In cases where more serious offences occur, including serious physical or mental abuse, there are mechanisms to ensure full cooperation with the police authority (where adequate).

#### Additional issue

Alcohol is a complex issue and requires a very clear policy from the workers' accommodation management. If a non-alcohol policy is taken, special attention should be paid to clearly communicate the interdiction, how it applies and the consequences for breaching this rule. Special attention should also be paid to enforce it adequately.

## G. Management of community relations

Workers' living facilities have various ongoing impacts on adjacent communities. In order to manage these, it is good practice to design a thorough community relations management plan. This plan will contain the processes to implement the findings of the preliminary community impact assessment and to identify, manage, mitigate or enhance ongoing impacts of the workers' accommodation on the surrounding communities. Issues to be taken into consideration include:

- community development – impact of workers' camp on local employment, possibility of enhancing local employment and income generation through local sourcing of goods and services
- community needs – ways to identify and address community needs related to the arrival of specific infrastructures such as telecommunications, water sanitation, roads, health care, education, housing
- community health and safety – addressing and reducing the risk in the increase in communicable diseases, corruption, trade in illegal substances such as drugs, alcohol (in the Muslim context), petty crimes and other sorts of violence, road accidents
- community social and cultural cohesion – ways to mitigate the impact of the presence of large numbers of foreign workers, often males, with different cultural and religious background, ways to mitigate the possible shift in social, economic and political structures due to changes in access to income generation opportunities.

### Benchmarks

1. Community relations plans addressing issues around community development, community needs, community health and safety and community social and cultural cohesion have been designed and implemented.
2. Community relations plans include the setting up of a liaison mechanism allowing a constant exchange of information and consultation with the local communities in order to identify and respond quickly to any problems and maintain good working relationships.
3. A senior manager is in charge of implementing the community relations management plan and liaising with the community.

- 
4. The impacts of workers' accommodation on local communities are periodically reviewed, mitigated or enhanced.
  5. Community representatives are provided with an easy means to voice their opinions and to lodge complaints.
  6. There is a transparent and efficient process for dealing with community grievances, in accordance with PS1/PR10.

**Box 10 - Examples of community relations management**

**Community consultation in the Baku-Tbilisi-Ceyhan (BTC) pipeline**

The BTC pipeline's Environment and Social Management Plans incorporated a Worker Camp Management Plan to be implemented by the construction contractor. As part of ongoing community liaison over the project as a whole, community liaison officers were appointed for worker camps who were responsible for meeting regularly with communities, identifying issues and addressing community concerns. A particular responsibility was to review HR records and disciplinary logs at worker camps to assess that rules were being implemented effectively and that any community liaison after any incidents was effective.



## **Appendix 25: Guidelines and Emergency plan for handling and storing chlorine**

***Instructions for Storage and Handling of Chlorine Cylinders (Based on the 'Manual on Operation and Maintenance of Water Supply Systems' published by the Central Public Health and Environmental Engineering Organization (CPHEEO) in 2005)***

### **1.1 Storage Area**

- a) Obtain storage license from controller of explosives under Gas Cylinder Rules 2004 if the quantity of Cl<sub>2</sub> containers to be stored is more than 5 Nos.
- b) Storage area should be cool, dry, well ventilated, and clean of trash and protected from external heat sources. Please refer to Manual on "Water Supply and Treatment", (1999 Edition), for further details.
- c) Ventilation must be sufficient to prevent accumulation of vapour pockets. The exhaust should be located either near the floor or duct be provided extending to the floor. All fan switches should be outside the storage area.
- d) Do not store container directly under the sun.
- e) Weather cock should be installed near the storage to determine wind direction.
- f) The storage building should be of non-combustible construction with at least two exits opening outside.
- g) Neutralization system should be provided.
- h) Continuous monitoring of chlorine leak detection equipment with alarm should be installed in the storage area.
- i) The area should be free and remote from elevators, gangways or ventilating system to avoid dangerous concentration of Chlorine during leak.
- j) Two portable foam type fire extinguishers should be provided in the premises.
- k) Corrosive substances shall not be stored nearby which react violently with each other.
- l) Unauthorized person should not be allowed to enter into the storage area.
- m) The floor level of storage shed should be preferably 30 cms (at least one foot) higher from the ground level to avoid water logging.
- n) Ensure that all containers are properly fitted with safety caps or hooks.

### **1.2. Cylinder & Drum Containers**

- a. Store chlorine cylinders upright and secure them so that they do not fall.

- b. Drum containers should be stored on their sides on rails, a few inches above the floor. They should not be stacked one upon the other. They should be stored such that the valves are in vertical plane.
- c. Keep enough space between containers so as to have accessibility in case of emergency.
- d. Store the containers in a covered shed only. Keep them away from any source of heat as excessive heat may increase the pressure in container which will result into burst.
- e. Do not store explosives, acids, turpentine, ether, anhydrous ammonia, finely divided metals or other flammable material in the vicinity of Chlorine.
- f. Do not store containers in wet and muddy areas.
- g. Store filled and empty containers separately.
- h. Protective covers for valves are secured even when the containers are empty, except during use in the system.
- i. Never use containers as a roller to move other equipment.
- j. Never tamper with fusible plugs of tonners.
- k. Check leakages every day by means of ammonia torch. However, it should not be touched to brass components like valves of container for safety.
- l. Never carry out any welding work on the chlorine system as combustion of steel takes place at 2510C in presence of chlorine.
- m. The boxes containing emergency kit, safety applications and self contained breathing apparatus should be kept in working order in an easily approachable area.

### **1.3. Use of Cylinders & Drum Containers in Process System**

- a. Use containers in the order of their receipt, as valve packing can get hardened during prolonged storage and cause gas leaks.
- b. Do not use oil or lubricant on any valve of the containers.
- c. Badly fitting connections should not be forced and correct tool should always be used for opening and closing valves. They should never be hammered.
- d. The area should be well ventilated with frequent air changes.
- e. Transport the cylinders to the process area by using crane, hoist or railings etc.
- f. The drum containers should be kept in a horizontal position in such a way that the valves are in a vertical plane. The upper valve gives out gas and the lower one gives out liquid chlorine.

g. The cylinder should be kept in upright position in order to release gas from the valve. For liquid chlorine withdrawal, it should be inverted with the help of an inverted rack.

h. Connect the containers to the system by using approved accessories.

i. Use copper flexible tube, with lead washer containing 2 to 4% antimony or bonded asbestos or teflon washer. Use yoke clamp for connecting chlorine container.

j. Never use rubber tubes, PVC tubes etc. for making connections.

k. Use the right spanner for operating the valve. Always keep the spanner on the valve spindle. Never use ill fitting spanner.

l. After making the flexible connection, check for the leakage by means of ammonia torch but it should not come in contact with a valve.

m. Keep minimum distance between the container valve and header valve so that during change-over of the container, minimum amount of gas leaks.

n. The material of construction of the adapter should be same as that of valve outlet threads. o. The valve should not be used as a regulator for controlling the chlorine. During regulation due to high velocity of Chlorine, the valve gets damaged which in turn can cause difficulty in closing.

p. The tools and other equipment used for operating the container should be clean and free of grease, dust or grit.

q. Wear breathing apparatus while making the change-over of the container from the process header.

r. Do not heat the container to withdraw more gas at faster rate.

s. Use pressure gauge and flow measuring device to control the flow and to know the quantity of gas left in the container.

t. Use an inverted U type barometric leg or vacuum breaking arrangement for connecting the container to the process piping.

u. Withdrawal of the gas should be stopped when the gas pressure inside the container is between 0.1 to 0.5 kg/cm<sup>2</sup> approximately.

v. If withdrawal of the gas from the container connected to the process system has to be suspended for long intervals, it should be disconnected from the system, and the valve cap and hood replaced.

w. Gas containers should be handled by trained persons only.

#### **1.4. Disconnecting Containers from Process System**

a. Use breathing apparatus before disconnecting the container.

- b. First close the container valve fully. After removal of chlorine the process valve should be closed.
- c. Remove the flexible connection, plug the flexible connection in order to avoid entry of humid air. Replace the valve cap or hood on the container.
- d. Put the tag on the empty container & bring it to storage area marked for empties. e. Check for the leakage.

### **1.5. Loading and Unloading of Containers**

- a. The handling of containers should be done under the supervision of trained and competent person.
- b. It should be done carefully with a crane, hoist or slanted ramp. Do not use magnet or sharp object for lifting the containers.
- c. Small cylinders should not be lifted by means of valve caps as these are not designed to carry the weight.
- d. The containers should not be allowed to strike against each other or against any hard object.
- e. Vehicles should be braked and isolated against any movement.
- f. After loading, the containers should be secured properly with the help of wooden wedges, rope or sling wire so that they do not roll away.
- g. The containers should never be dropped directly to the ground or on the tyre from the vehicle.
- h. There should be no sharp projection in the vehicle.
- i. Containers must have valve caps and plugs fitted properly.
- j. Check containers for leakage before loading/unloading.

### **1.6. Transportation of Container**

- a. The name of the chemical along with diamond pictorial sign denoting the dangerous goods should be marked on the vehicle.
- b. The name of the transporter, his address and telephone number should be clearly written on the vehicle.
- c. The vehicle should not be used to transport any material other than what is written on it. d. Only trained drivers and cleaners should transport hazardous chemical
- e. The driver should not transport any leaking cylinder.
- f. The cylinder should not project outside the vehicle.

g. The transporter must ensure that every vehicle driver must carry "Trem Card" (Transport Emergency Card) and 'Instructions in writing booklet' and follow them.

h. Every driver must carry safety appliances with him, viz; Emergency kit, breathing apparatus etc.

i. The vehicles must be driven carefully, specially in crowded localities and on bumpy roads. Do not apply sudden brakes.

j. Check for the leakage from time to time.

k. In the case of uncontrollable leakage the vehicle should be taken to an open area where there is less population.

**1.7. Emergency Kit** It consists of various tools and appliances like gaskets, yokes, studs, tie rods hoods, clamps, spanners, mild steel channels, screws, pins, wooden pegs etc. of standard sizes. Separate kits are used for cylinders and tonners. All the gadgets are designed for using in controlling or stopping the leakages from valves, fusible plug and side walls of cylinders and containers used for handling chlorine.

a. Leakage may occur through the valve. There are basically four types of valve leaks.

I. Valve packing

II. Valve seat

III. Defective inlet thread

IV. Broken valve thread

b. Leakage may occur through container wall. For controlling such leakages, clamps are used for cylinders and chain and yoke arrangement is used for tonner. Sometimes wooden peg is used by driving into the leaking hole as a temporary arrangement.

c. Leakage may occur through fusible plug.

i. If the leakage is through the threads of fusible plug, yoke, hood and cap nut arrangement is used to control the leak.

ii. If fusible metal itself in the plug is leaking, yoke and stud arrangement is used to control the leak.

### **1. First Aid to be Provided for a Person Affected by Chlorine**

**a. General** Remove the affected person immediately to an uncontaminated area. Remove contaminated clothing and wash contaminated parts of the body with soap and plenty of water. Lay down the affected person in cardiac position and keep him warm. Call a physician for medical assistance at the earliest. Caution: Never attempt to neutralize chlorine with other chemicals.

**b. Skin Contact** Remove the contaminated clothes, wash the affected skin with large quantity of water. Caution: No ointment should be applied unless prescribed by the physician.

**c. Eye Contact** If eyes get affected with liquid chlorine or high concentration of chlorine gas, they must be flushed immediately with running water for atleast 15 minutes keeping the eyelids open by hand. Caution: No ointment should be used unless prescribed by an eye specialist.

**d. Inhalation** If the victim is conscious, take him to a quiet place and lay him down on his back, with head and back elevated (cardiac position). Loosen his clothes and keep him warm using blankets. Give him tea, coffee, milk, peppermint etc. for making good effect on breathing system. If the victim is unconscious, but breathing, lay him down in the position mentioned above and give oxygen at low pressure until the arrival of doctor. If breathing has stopped, quickly stretch him out on the ground or a blanket if available, loosen his collar and belt and start artificial respiration without delay. Neilson arm lift back pressure method is useful. Automatic artificial respiration is preferable if available. Continue the respiration until the arrival of the doctor. Amboo bag can also be used for this purpose.

### **3. On-Site Emergency Plan to Cover the Leakage of Chlorine**

**3.1. Introduction** As chlorine is a hazardous chemical, handling and storage of it demand adequate precautions to avoid possible hazards. Leakage of chlorine may develop into a major emergency. Therefore the emergency procedure to cover this eventuality is essential. It is drawn in the form of on-site emergency plan. The elements of onsite emergency plan are as follows:

#### **3.2. Identification of Hazard Chart**

In this case the site risk is evaluated by the expert and the extent of the probable damage is calculated on the basis of stored chlorine quantity, nearby population, wind direction, type of equipment failure etc. For this purpose hazard analysis is conducted in which case all the hazardous properties of chlorine are considered. If evacuation is required, the range of it is calculated.

**3.3. Appointing Key Persons** In order to control the incident like chlorine leakage, it is essential to appoint various persons with their well-defined responsibilities. Taking into account the various activities likely to be involved, the following key persons are appointed (i) Site Controller, (ii) Incident controller, (iii) Shift Executive In charge, (iv) Communication Officer, (v) Safety Officer, (vi) Fire and Security Officer, (vii) Utilities and Services In charge, (viii) Traffic Controller, (ix) First Aider

**3.4. Assembly Points** These points are set up where persons from the plant would assemble in case of chlorine leakage. At these points the in-charge for counting the heads will be available.

#### **3.5. Emergency Control Center**

The control centre is the focal point in case of an emergency from where the operations to handle the emergency from are directed and coordinated. It contains site plan, telephone lines,

public address system, safety equipment, first aid boxes, loud speaker, torches, list of essential telephone numbers, viz. fire brigade, police, hospital, civil defence, collector, factory inspector, organizational authorities, chlorine suppliers, mutual aid group, social workers, list of key persons and their addresses, copy of chemical fact sheet, location plan of fire hydrant, details of dispersion model of chlorine gas, population distribution pattern, location of alarm system.

### **3.6. Procedure to Meet Emergency**

The actions to be taken by the staff and authority are given below; Emergency Alarm: An audible emergency alarm system is installed throughout the plant. On hearing the alarm the incident controller will activate the public address system to communicate with the staff about the emergency and give specific instructions for evacuations etc. anyone can report the occurrence of chlorine leakage to section in-charge or incident controller through telephone or intercom or in person.

### **3.7. Communication**

Communication officer shall establish the communication suitable to that incident.

### **3.8. Services**

For quickness and efficient operation of emergency plan the plant is divided into convenient number of zones and clearly marked on the plan. These are emergency services viz. fire fighting, first aid, rescue, alternative source of power supply, communication with local bodies etc. The incident controller will hand over the charge to the site controller of all these coordinating activities, when the site controller appears on the site. The site controller will coordinate all the activities of the key persons. On hearing the emergency alarm system all the key persons will take their charge. In case of their absence other alternatives are nominated. The person nominated for personnel and administration purposes will be responsible for informing all statutory authorities, keeping account of all persons in the plant including contract labour, casual workers and visitors. He will be responsible for giving information to press or any outside agencies. He is also responsible for organizing canteen facilities and keeping informed the families of affected persons. The person nominated as security officer should guide police, fire fighting and control the vehicle entries. The site controller or any other nominated person will announce resumption of normalcy after everything is brought under control. The onsite emergency plan needs to be evaluated by mock drill. Any weaknesses noticed during such drills should be noted and the plan is modified to eliminate the weaknesses.

### **3.9. Emergency**

Measures In case of leakage or spillage of Chlorine, the following emergency measures should be taken:

- a) Take a shallow breath and keep eyes opened to a minimum.
- b) Evacuate the area.

- c) Investigate the leak with proper gas mask and other appropriate Personal protection.
- d) The investigator must be watched by a rescuer to rescue him in emergency.
- e) If liquid leak occurs, turn the containers so as to leak only gas.
- f) In case of major leakage, all persons including neighbours should be warned.
- g) As the escaping gas is carried in the direction of the wind all persons should be moved in a direction opposite to that of the wind. Nose should be covered with wet handkerchief.
- h) Under no circumstances should water or other liquid be directed towards leaking containers, because water makes the leak worse due to corrosive effect.
- i) The spillage should be controlled for evaporation by spraying chilled water having temperature below 9.4oC. With this water crystalline hydrates are formed which will temporarily avoid evaporation. Then try to neutralize the spillage by caustic soda or soda ash or hydrated lime solution carefully. If fluoroprotein foam is available, use for preventing the evaporation of liquid chlorine.
- j) Use emergency kit for controlling the leak.
- k) On controlling the leakage, use the container in the system or neutralize the contents in alkali solution such as caustic soda, soda ash or hydrated lime. Caution: Keep the supply of caustic soda or soda ash or hydrated lime available. Do not push the leaking container in the alkali tank. Connect the container to the tank by barometric leg.
- l) If container commences leak during transport, it should be carried on to its destination or manufacturer or to remote place where it will be less harmful. Keeping the vehicle moving will prevent accumulation of high concentrations.
- m) Only specially trained and equipped workers should deal with emergency arising due to major leakage.
- n) If major leak takes place, alert the public nearby by sounding the siren.
- o) Any minor leakage must be attended immediately or it will become worse.
- p) If the leakage is in the process system, stop the valve on the container at once.

### **3.10. Safety Systems Required at Chlorination Plant**

The following safety systems should be kept ready at the chlorination plant:

- a. Breathing apparatus.
- b. Emergency kit.
- c. Leak detectors.



- d. Neutralisation tank.
- e. Siren system.
- f. Display of boards in local language for public cautioning, first aid and list of different authorities with phone numbers.
- g. Communication system.
- h. Tagging system for equipments.
- i. First aid including tablets and cough mixtures.
- j. Exhaust fans.
- k. Testing of pressure vessels, chlorine lines etc. every year as per factory act.
- l. Training & mock drill.
- m. Safety showers.
- n. Eye fountain.
- o. Personal protective equipment.
- p. Protecting hoods for ton-containers.
- q. Fire extinguishers.
- r. Wind cock.

## Appendix 26: Details of Public Consultations

### A. Consultations during Preparation of IEE

Various consultations were done during preparation of IEE with residents of the town at various locations to understand their level of satisfaction about the present water supply and sewerage conditions in town and also to understand their awareness about the proposed works and their willingness/acceptance of the proposed works under RUSTDIP. Details of these consultations are given below-

| S.No | Number of Person consulted | Male | Female | Issues Discussed                                                                                                | Outcome                                                                                       |
|------|----------------------------|------|--------|-----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| 1    | 70                         | 40   | 30     | Present Water supply and sewerage system of the town, Project components, sewerage system, property connection, | Public in general were satisfied with the components identified and assured required support. |

| S.No | Date of Consultation | Location/ Participants        | Topic Discussed and photographs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Outcome                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------|----------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | 28.08.2018           | Ward no-2<br><br>Female Group | <ul style="list-style-type: none"> <li>• Present water supply and sewerage system,</li> <li>• Awareness of the project—including Project Coverage area,</li> <li>• Presence of any forest, wild life or any sensitive/ unique environmental components nearby the project,</li> <li>• Present solid waste collection and disposal problem,</li> <li>• Dust and noise pollution and disturbances during construction work,</li> <li>• Safety of residents during construction phase and applying of vehicle for construction activities, proposed water supply works,</li> <li>• Environment &amp; public health and availability of land,</li> <li>• R &amp; R issues; if any etc.</li> </ul> | <ul style="list-style-type: none"> <li>• People are concerned about the poor water quality and lack of sewerage system issues of the town.. Some People are aware of the proposed project of water supply.</li> <li>• There are no any forest, wildlife or any sensitive /unique environmental, component nearby the project. Solid waste collection facility is poor in this area. Town has lack of solid waste collection and their proper disposal facilities.</li> <li>• People demanded for the measures of dust suppression such as water sprinkler to control dust and noise during construction phase.</li> <li>• Proper care of the safety arrangement during construction phase and should provide traffic diversion routes to avoid the vehicle congestion by the contractor.</li> </ul> |

| S.No | Date of Consultation | Location/ Participants           | Topic Discussed and photographs                                                                                                                                                                                                                                                                                                               | Outcome                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------|----------------------|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      |                      |                                  |                                                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>Water supply is intermittent and there are a lot of losses due to profuse leaking of old pipes. By the proposed project of water supply environment &amp; public health will be improved and chance of water borne diseases will be mitigated in the area/town. They want to supply the water on 24x7. They have given their concurrence about the proposed works.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 2    | 28.08.2018           | Ward no-3<br><br>Local Habitants | <ul style="list-style-type: none"> <li>Present Status of Water Supply and sewerage system in the town</li> <li>Work Proposed by RUIDP</li> <li>Environment &amp; Health impacts of proposed projects</li> <li>Quality of present Water Supply.</li> </ul>  | <ul style="list-style-type: none"> <li>People are concerned about the poor supply (intermittent supply on alternate days) and quality of water. No sewerage in the town</li> <li>People are supportive of the project.</li> <li>By the proposed projects of water supply, chance of water borne disease will be mitigated as proper disinfection will be ensure before supply the water and there relevant health implication will be mitigated due to mitigated in the area/town.</li> <li>People are willing to pay for improved services.</li> <li>There are no any forest, wildlife or any sensitive /unique environmental, component nearby the project. Solid waste collection facility is poor in this area. Town has lack of solid waste collection and their proper disposal facilities.</li> <li>People demanded for the measures of dust suppression such as water sprinkler to control dust and noise during construction phase.</li> <li>Proper care of the safety arrangement during construction phase and should provide traffic diversion routes to avoid the vehicle congestion by the contractor.</li> <li></li> <li>People are agree with the proposed water supply</li> </ul> |

| S.No | Date of Consultation | Location/ Participants           | Topic Discussed and photographs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Outcome                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------|----------------------|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      |                      |                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | works and understand that proposed works will improve health and environmental conditions of town and chances of water borne diseases will be mitigated at some extent.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 3    | 29 .08.2018          | Ward no-3<br><br>Local Habitants | <ul style="list-style-type: none"> <li>• Present water supply system,</li> <li>• Awareness of the project—including Project Coverage area,</li> <li>• Presence of any forest, wild life or any sensitive/ unique environmental components nearby the project,</li> <li>• Present solid waste collection and disposal problem,</li> <li>• Dust and noise pollution and disturbances during construction work,</li> <li>• Safety of residents during construction phase and applying of vehicle for construction activities, proposed water supply works,</li> <li>• Environment &amp; public health and availability of land,</li> </ul>  | <p>People are supportive of the project and indicated their willingness to participate in the project to make it successful.</p> <p>There are not any forest, wildlife or any sensitive/unique environmental, component nearby the project site.</p> <p>The contractor should take care of the safety arrangement during construction phase and should provide traffic diversion routes to avoid the vehicle congestion</p> <p>People understand direct benefits of construction of STPs for effective treatment of sewage of town.</p> <p>There are no any forest, wildlife or any sensitive /unique environmental, component nearby the project. Solid waste collection facility is poor in this area. Town has lack of solid waste collection and their proper disposal facilities.</p> <ul style="list-style-type: none"> <li>• People demanded for the measures of dust suppression such as water sprinkler to control dust and noise during construction phase.</li> <li>• Proper care of the safety arrangement during</li> </ul> |

| S.No | Date of Consultation | Location/ Participants               | Topic Discussed and photographs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Outcome                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------|----------------------|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      |                      |                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <p>construction phase and should provide traffic diversion routes to avoid the vehicle congestion by the contractor.</p> <p>People appreciated ongoing works of sewerage in town and hoped that after completion of proposed works, problem of disposal of sludge from septic tanks and foul smell from outflow of septic tanks will be eliminated and sanitation and health conditions will be improved.</p> <p>People also appreciated for locating STPs far from habitations.</p> <p>People shown their willingness to pay for improved services of water supply and sewerage facilities</p> |
| 4    | 29 .08.2018          | Local Habitant and petty businessmen | <ul style="list-style-type: none"> <li>• Present water supply system,</li> <li>• Awareness of the project—including Project Coverage area,</li> <li>• Presence of any forest, wild life or any sensitive/ unique environmental components nearby the project,</li> <li>• Present solid waste collection and disposal problem,</li> <li>• Dust and noise pollution and disturbances during construction work,</li> <li>• Safety of residents during construction phase and applying of vehicle for construction activities, proposed water supply works,</li> </ul> | <p>People are supportive of the project and indicated their willingness to participate in the project to make it successful.</p> <p>People are suffering with scarcity of water in the town and they are also not satisfied with quality of water.</p> <p>They are hopeful that proposed works will improve quantity and quality of drinking water and</p>                                                                                                                                                                                                                                      |

| S.No | Date of Consultation | Location/ Participants         | Topic Discussed and photographs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Outcome                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------|----------------------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      |                      |                                | <ul style="list-style-type: none"> <li>• Environment &amp; public health and availability of land,</li> <li>• Present water supply system,</li> <li>• Awareness of the project—including Project Coverage area,</li> <li>• Presence of any forest, wild life or any sensitive/ unique environmental components nearby the project,</li> <li>• Present solid waste collection and disposal problem,</li> <li>• Dust and noise pollution and disturbances during construction work,</li> <li>• Safety of residents during construction phase and applying of vehicle for construction activities, proposed water supply works,</li> <li>• Environment &amp; public health and availability of land,</li> </ul>  | <p>hope that good quality water will improve their health conditions.</p> <p>They also appreciated the proposed sewerage works in the town and awaiting that after completion of works, sanitation and health conditions of people will improve as they will find safe disposal of sewers from their houses, which is now creating a great nuisance due to mixing with drainage system of town.</p> <p>There are not any forest, wildlife or any sensitive/unique environmental, component nearby the project site.</p> <p>The contractor should take care of the safety arrangement during construction phase and should provide traffic diversion routes to avoid the vehicle congestion</p> <p>They shown their willingness to pay for improved services but worried about rates and demand for low rates for sewerage connection charges.</p> |
|      | 29.08.2018           | Ward no-7<br><br>Local Farmers | <p>,</p> <ul style="list-style-type: none"> <li>• Present water supply system,</li> <li>• Awareness of the project—including Project Coverage area,</li> <li>• Presence of any forest, wild life or any sensitive/ unique environmental components nearby the project,</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <p>People are supportive of the project and indicated their willingness to participate in the project to make it successful.</p> <p>People understand direct benefits along with latent benefits of the project.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

| S.No | Date of Consultation | Location/ Participants | Topic Discussed and photographs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Outcome                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------|----------------------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      |                      |                        | <ul style="list-style-type: none"> <li>• Present solid waste collection and disposal problem,</li> <li>• Dust and noise pollution and disturbances during construction work,</li> <li>• Safety of residents during construction phase and applying of vehicle for construction activities, proposed water supply works,</li> <li>• Environment &amp; public health and availability of land,</li> <li>• Willingness to use treated effluent and sludge from</li> </ul>  | <p>Farmers informed that there is great scarcity of water for irrigation in the town and therefore they only grow one crop in the year. If treated water will be available to them, they will grow more crops in their fields.</p> <p>They were also interested to use treated sludge from STPs as manure in their agriculture.</p> <p>There are not any forest, wildlife or any sensitive/unique environmental, component nearby the project site.</p> <ul style="list-style-type: none"> <li>• The contractor should take care of the safety arrangement during construction phase and should provide traffic diversion routes to avoid the vehicle congestion.</li> <li>• There are no any forest, wildlife or any sensitive /unique environmental, component nearby the project. Solid waste collection facility is poor in this area. Town has lack of solid waste collection and their proper disposal facilities.</li> <li>• People demanded for the measures of dust suppression such as water sprinkler to control dust and noise during construction phase.</li> <li>• Proper care of the safety arrangement during construction phase and should provide traffic diversion routes to avoid the vehicle congestion by the contractor.</li> </ul> |

| S.No | Date of Consultation | Location/ Participants | Topic Discussed and photographs | Outcome                                                                                                                                             |
|------|----------------------|------------------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
|      |                      |                        |                                 | They informed that drinking water supply suffers in terms of quality and quantity and hope that improved water supply will not very costly to them. |

### Consultation Attendance sheet

**Consultation sheet**

Place Mordha Date 22-08-18

Topic Discussed water supply & drainage system in city






| S.No. | Name        | Designation/Mobile No. | Signature   |
|-------|-------------|------------------------|-------------|
| 1     | Savita Devi | 9162673223             | [Signature] |
| 2     | Manvi Devi  | 9799458075             | [Signature] |
| 3     | Manvi Devi  |                        | [Signature] |
| 4     | Rakhi       |                        | [Signature] |
| 5     |             |                        |             |



Date \_\_\_\_\_

Topic Discussed Water supply & Sewerage

Secodar Shar City & Discharge of existing system

| S.No. | Name         | Designation/Mobile No. | Signature                                                                            |
|-------|--------------|------------------------|--------------------------------------------------------------------------------------|
| 1     | अमित कुमार   | 8104472531             |   |
| 2     | अभिषेक       | 9649988808             |   |
| 3     | हितेश        | 8503020550             |   |
| 4     | हर           | 7023992645             |   |
| 5     | शुभम         | 8824242430             |   |
| 6     | हेरिओम       | 7976697464             |   |
| 7     | सन्दीप कुमार | 9783153294             |   |
| 8     | विकास        | 9828630711             |  |
| 9     |              |                        |                                                                                      |

Topic Discussed: Existing water supply system  
on 21st Nov 2017  
at Sardarshahar

| S.No. | Name          | Designation/Mobile No. | Signature |
|-------|---------------|------------------------|-----------|
| 1     | Anachi Dori   |                        |           |
| 2     | Rohitika Bora |                        |           |
| 3     | Bhagwati Dori |                        |           |
| 4     | Nidhi Bora    |                        |           |
| 5     | Saral Dori    |                        |           |
| 6     | Kamla Dori    |                        |           |
| 7     | Tessa Bora    |                        |           |
| 8     | Madhavi Bora  |                        |           |
| 9     | Pravina Bora  |                        |           |
| 10    |               |                        |           |

## B. Stakeholders Consultations in CLC:

## C. Stakeholders Consultations during project Design:

Consultations were done by design engineers with various departments to discuss the project design and availability of lands required for proposed components. Details of these consultations are given below-

| S. No. | Name of person consulted & Designation                           | Date & Place               | Point Discussions                                                  | Outcomes                                     |
|--------|------------------------------------------------------------------|----------------------------|--------------------------------------------------------------------|----------------------------------------------|
| 1      | Mr. Ramesh Saini, Executive Engineer, RUIDP, Sardarshahar        | 26.10.2017                 | Existing Sewerage System and also met PHED Officials with Mr.Saini | Received Existing Sewerage As-Built Drawings |
| 2      | Mr. Meena, Executive Engineer, PHED, Sardarshahar                | 16.11.2017                 | Existing Water Supply System                                       | Received Existing Water Supply System Detail |
| 4      | Mr. Sunil Jain, JEn, Nagar Palika, Sardarshahar                  | 16.11.2018<br>Nagar Palika | Ward Map and Municipal Boundary                                    | Collected Ward Map                           |
| 3      | Mr. Pramod Jangir, Executive Officer, Nagar Palika, Sardarshahar | 01.08.2018<br>Nagar Palika | Land for Proposed SPS & STP                                        | Suggested site visit and land finalized      |

|   |                                                 |                            |                                            |                          |
|---|-------------------------------------------------|----------------------------|--------------------------------------------|--------------------------|
| 4 | Mr. Sunil Jain, JEn, Nagar Palika, Sardarshahar | 01.08.2018<br>Nagar Palika | Site visit for Land for Proposed SPS & STP | STP & SPS land finalized |
| 5 | Mr. Sukaran, LDC, Nagar Palika, Sardarshahar    | 01.08.2018<br>Nagar Palika | Site visit for Land for Proposed SPS & STP | STP & SPS land finalized |

**Appendix 27: Minutes of City level Stakeholder Committee (CLC) Meeting**

City level Stakeholder Committee (CLC) Meeting (dt. 13.07.2018)- City stakeholder committee meeting was organized for Sardarshahar District Head Quarter, Churu on dt. 13.07.2018 to discuss the matter of proposed Water Supply and Sewerage works in Sardarshahar under the chairmanship of District Collector, Churu in presence of consultants, RUIDP officials, PHED officials, Municipal Council officials and other invitee members. Proposed scope of works and technology was discussed in the meeting and it was decided that treated effluent shall be reused by Municipality in beneficial uses. Minutes of CLC meeting, attendance sheet and photographs are given below-



**Government of Rajasthan**  
**Office of the Executive Engineer, IPIU,**  
**Rajasthan Urban Sector Development Investment Program (RUIDP – Phase – II)**  
**PMC Campus, Bhaeri Road, Churu**

Tel No.: 01562-252804  
 email : churu.ruidp@rajasthan.gov.in

Fax No.: 01562-252804  
 web site : www.ruidp.org

No.EE/RUIDP/CHURU/CLC/18-19/ 241

Date: 20.07.2018

**Minutes of CLC meeting held on dated 13.07.2018 for Sewerage works at Ratangarh and Water supply & Sewerage works at Sardarshahar town (CHURU) under RUIDP Phase-IV.**

A City Level Committee (CLC) meeting was held under the chairmanship of District Collector, Churu on dated 13.07.2018 to discuss the Sewerage works proposed for Ratangarh and Water supply & Sewerage works proposed for Sardarshahar Town under RUIDP Phase-IV. List of members/officers attended the meeting is enclosed as **Annexure-A.**

**RATANGARH TOWN**

1. It was apprised that the Detailed Project Report (DPR) of Sewerage project is prepared by the Consultant **M/s Creative Technocrate Services Pvt. Ltd. Jaipur** engaged by the Municipal Board Ratangarh (Churu), which will be considered under RUIDP Phase-IV. RUIDP has scrutinized the Draft DPR and suggestions have already been conveyed to consultant for modifications & revised the estimate as per RUIDP SOR- 2017.
2. The basic scope of works & provision in DPR were briefed to the committee. The estimated cost of DPR is of about **Rs 279 Cr** for works proposed under waste water sector including 10 years O&M cost. The capital cost for execution of works will be borne by State Government financed by ADB under RUIDP Phase-IV. The O&M cost for Sewerage works (STP, SPS & sewer line) is to be borne by Municipal Board as per actual basis along with power charges. The brief scope of works are as follows:

**Sewerage Works:** The scope under project to provide sewer network of about 219 Km length with 15872 nos. house sewer connections, three STPs (4.5 MLD, 3.5 MLD and 2.5 MLD capacity) & one Sewage Pumping Station (SPS) to pump sewage of low laying area to STP by 2180 mtr rising main. It was informed that STP is proposed on latest Sequential Batch Reactor (SBR) technology to meet out the latest effluent parameters. To reduce inconvenience to public deeper depth (3.5 mtr above) & crossing of NH & circles where traffic is more, trenchless technology for laying of sewer is proposed. CC/BT road restoration up to 4 mtr is proposed in full width. FSM generation for scattered areas at Ratangarh outskirts shall be taken.

*[Signature]*

Page 1 of 3

Scanned by CamScanner

3. Municipal Board has informed that land is available for construction of STP and Sewage Pumping Station within town and permission and land papers also submitted as required from competent authority.
4. It was also deliberated that for public complaint redressal, provision of toll free number along with set up of a control room should be taken in the provision.
5. It was also suggested to enhance the roles and responsibilities of local bodies during the construction period. It was suggested to include the sewer jetting machine under the contract. After completion of project works, whole town will be benefited from sewerage facility.

#### **SARDARSHAHAR TOWN**

1. It was apprised that the Detailed Project Report (DPR) of Water supply & Sewerage project is prepared by the Consultant **M/s STUP Consultants Pvt. Ltd., New Delhi** engaged by RUIDP, which will be considered under RUIDP Phase-IV. RUIDP has scrutinized the Draft DPR and suggestions have already been conveyed to consultant for modifications & revised the estimate as per RUIDP SOR- 2017.
2. The basic scope of works & provision in DPR were briefed to the committee. The total tentative cost of DPR is **Rs 226 Cr** (for water supply sector Rs. 86 Cr and for waste water sector Rs. 140 Cr) including 10 Years O&M cost. The capital cost for execution of works will be borne by State Government financed by ADB under RUIDP phase-IV. The O&M cost for Water supply works is to be borne by the PHED and for Sewerage works (STP, SPS & sewer line) by Municipal Board as per actual along with power charges. The brief scope of works are as follows:

**Water Supply Works:** - The scope under the project is to develop water supply system of Sardarshahar town. About 19.71 Km transmission mains (15.86 km existing & 3.85 Km new) are proposed to feed storage reservoirs and approx. 207 Km distribution network to supply water to consumer end including 22000 nos. house service connections with domestic water meters for continuous pressurized water supply. One new Clear Water Reservoir (CWR) of 2000 KL is proposed at existing CWR campus at Hanumangarh road.

**Sewerage Works:-** The scope under project to provide sewer network of about 82 Km length including 11 Km trenchless pipe with 9966 nos. house sewer connections, three new STPs (2.5 MLD, 5 MLD & 2.5 MLD capacity) & two Sewage Pumping Station (SPS) to pump sewage of low laying area to main sewer are proposed under the sewerage system. Up-gradation of existing STPs are also proposed under the project. It was informed that STP is proposed on latest Sequential Batch Reactor (SBR) technology to meet out the latest effluent parameters. To reduce inconvenience to public deeper depth (3.5 mtr above) where



Page 2 of 3

traffic is more, trenchless technology for laying of sewer is proposed. CC/BT road restoration up to 4 mtr is proposed in full width. FSM generation for scattered areas at Sardarshahar outskirts shall be taken.

3. The Operation & Maintenance payment will be performance based under the contract.
4. It was informed that land is available for construction of CWR's and Pump House's at near existing CWR at Hanumanagarh Road. It was instructed to Municipal board to provide the land for the construction of one STP (0.25 Hectare land in Ward 18) and two SPS (25m x 20m land near Navjeevan hospital Bikaner road and near railway station). Municipal officials assured for the same.
5. It was informed that sufficient space has been kept for laying sewer and water supply lines within the ROW of the town's Major roads. It was also deliberated that for public complaint redressal for customer relation centers will be taken under the contract. It was also deliberated that work shall be done in planned manner to avoid any inconvenience to public.
6. After completion of project works, whole town will be benefited from water supply and sewerage facility. It was suggested to include the sewer jetting machine under the contract.

Suggestions and directions of the City level committee will be incorporated in the detail project report. The project was agreed by the committee for further course of action at RUIDP level. Meeting ended with vote of thanks to the chair.

  
**Executive Engineer**  
**Member Secretary, CLC**  
**RUIDP, Churu**

Date: 29.07.2018

No.EE/RUIDP/CHURU/CLC/18-19/ 242- 253

Copy to the following for information and necessary action:

1. PA to Hon'ble Minister, Devasthan Department, Govt of Rajasthan.
2. PA to Hon'ble MP, Churu
3. PA to Hon'ble MLA, Sardarshahar
4. Project Director, RUIDP, Jaipur.
5. District Collector & Chairman CLC, Churu
6. Chairman, Municipal Board, Ratangarh/ Sardarshahar.
7. Additional Project Director/Chief Engineer/ Addl Chief Engineer, RUIDP, Jaipur.
8. Superintending Engineer (WW/WS), RUIDP, Jaipur.
9. Superintending Engineer, PHED/ PWD/WRD, Churu.
10. Executive Engineer, PWD/PHED, Ratangarh/ Sardarshahar
11. Executive Officer, Municipal Board, Ratangarh/ Sardarshahar.
12. District Town Planner, Town Planning Department, Churu.

  
**Executive Engineer**  
**Member Secretary, CLC**  
**RUIDP, Churu**

Page 3 of 3.

## Attendance Sheet of CLC meeting

Annexure - A

## उपस्थिति पंजीयन

सरदारशहर एवं रतनगढ़ शहर में आर.यू.आई.डी.पी. फेज चतुर्थ के कार्यों के संयन्ध में सिटी लेवल कमेटी की बैठक कलेक्ट्रेट सभागार, चुरू में आयोजित दिनांक 13 जुलाई 2018, दोपहर 1:00 बजे

| क्र.सं. | नाम                                | पद नाम                                                                                 | मोबाईल सं. | हस्ताक्षर  |
|---------|------------------------------------|----------------------------------------------------------------------------------------|------------|------------|
| 01      | श्रीमान् राजकुमार रिणदा            | माननीय राज्य मंत्री (स्वतंत्र प्रभार)<br>देवस्थान विभाग, राज0 सरकार<br>(विधायक-रतनगढ़) | 9414085140 | रिणदा      |
| 02      | श्रीमान् राहुल कस्वां              | माननीय सांसद, चुरू                                                                     |            |            |
| 03      | श्रीमान् भवैर लाल शर्मा            | माननीय विधायक, सरदारशहर                                                                |            |            |
| 04      | श्री मुक्तानन्द अग्रवाल            | जिला कलक्टर, चुरू                                                                      |            |            |
| 05      | सुषमा पीपा                         | अध्यक्ष न.प.स.संस्था<br>चुरू                                                           | 9414465550 | सुषमा पीपा |
| 06      | Pranod Jangir                      | E.O. नं.पं. 0551121ER                                                                  | 8132020849 | Pranod     |
| 07      | Moos Mohd Khan                     | E.O. N.P. Ratanagar                                                                    | 9829230911 | मोस        |
| 08      | Sugreeb Singh                      | SV Town Planner Bikaner<br>Zone                                                        | 9414264788 | सुग्रीब    |
| 09      | M. Afzal Jatta                     | D.P.P., CHURU                                                                          | 9602453477 | म. अफ़्ज़ल |
| 10      | वैद्य बालकृष्ण गोस्वामी            | अध्यक्ष- साहित्यिक संस्था<br>रतनगढ़                                                    | 9414403553 | वैद्य      |
| 11      | अमज उमरा मंगलहारा                  | महासचिव, लोक सेवा संस्थान<br>रतनगढ़                                                    | 9414726703 | अमज        |
| 12      | लीटि कल्याण सिंह<br>(इन्फो ह्यूमन) | अध्यक्ष: मंगलहारा, रतनगढ़                                                              | 9828524655 | लीटि       |
| 13      | रामगोपाल खोशरी                     | उपाध्यक्ष नगरपालिका रतनगढ़                                                             | 9680028918 | रामगोपाल   |
| 14      | Sushovan Prasad                    | GEN N.P. Ratanagar                                                                     | 9667516549 | Sushovan   |
| 15      | रिवानन्द पीपलवा                    | R.A. मा. देव (वार्ड नं. 1)                                                             | 9413360631 | रिवानन्द   |
| 16      | मेहरा प्रभापति                     | उपाध्यक्ष रतनगढ़                                                                       | 9414395049 | मेहरा      |
| 17      | चमलचन्द मोहित                      | रतनगढ़ रोजी                                                                            | 9214509822 | चमलचन्द    |
| 18      | मोहन लाल कर्षण                     | अध्यक्ष न.प.स.संस्था<br>रतनगढ़                                                         | 9413075259 | मोहन       |
| 19      | B.m. pilamis                       | EE (non) PHED Circle clu                                                               | 9413073889 | B.m.       |
| 20      | R.D. Meens                         | इंज (प्रोजेक्ट) PHED<br>Superintendant                                                 | 9413888207 | R.D.       |



| क्र.सं. | नाम                 | पद नाम                             | मोबाईल सं. | हस्ताक्षर |
|---------|---------------------|------------------------------------|------------|-----------|
| 21      | Mohun Chandra       | CONSULTANT CTS<br>JAIPUR           | 9461823211 |           |
| 22      | Raviendra Kumar     | Consultant CTS Jaipur              | 7340061307 |           |
| 23      | Suresh C. Khanchuri | ADB- PPTA Social Devt<br>Gender    | 9711185155 |           |
| 24      | Ramesh ch Sahni     | EE RUIDP SKDR/JN                   | 9413304130 |           |
| 25      | RAJAT KUMAR GARG    | STUP CONSULTANT                    | 9811106835 |           |
| 26      | A. V. Rahul         | STUP CONSULTANT                    | 9414055625 |           |
| 27      | Sanchita Saha       | STUP Consultant                    | 9971104449 |           |
| 28      | Prmit Soni          | STUP consultant                    | 9811998271 |           |
| 29      | Jaideep Datta       | Creative                           | 9414042624 |           |
| 30      | K C Agarwal         | POCHW, PMU, Jaipur                 | 9414782355 |           |
| 31      | Pooideep Garg       | Arch. CE, PMU                      | 9414257244 |           |
| 32      | D. Singh Kumar      | RUIDP J.R                          | 9462254563 |           |
| 33      | Vikram Singh        | — cl                               | 9462262921 |           |
| 34      | Visram Singh        | P.M. - CCL                         | 9680774222 |           |
| 35      | Munirul             | Stn. Probr                         | 9987429292 |           |
| 36      | Keshav Purohit      |                                    | 9828376547 |           |
| 37      | Shilpi Singh        | आरटीओ एंटरप्राइज<br>असिस्टेंट      | 9414080398 |           |
| 38      | Dinesh Verma        | Executive Engineer<br>RUIDP, Churu | 9828426880 |           |

# रतनगढ़ में 280 करोड़ में होगा सीवरेज का काम, पानी की समस्या का होगा स्थाई समाधान

सरदारशहर में 219 किमी की पाइप लाइन व तीन एसटीपी का निर्माण

भारत समाचार | पृष्ठ

आरवूआईडीपी की तरफ से रतनगढ़ में 280 करोड़ रुपये खर्च कर सीवरेज योजना का काम शुरू किया जाएगा। कलेक्टर सभागार में रतनगढ़ व सरदारशहर में सीवरेज व पानी आपूर्ति परियोजना की डीपीआर अनुमोदन की लेकर देवस्थान राज मंत्री की उपस्थिति में सिटी लेवल कमिटी की हुई बैठक में यह बताया गया। कलेक्टर मुक्तानंद आग्वाल की अध्यक्षता में हुई बैठक में रतनगढ़ के तकनीकी सलाहकार फर्म की तरफ से रतनगढ़ के लिए 279.30 करोड़ रुपये की सीवरेज परियोजना प्रस्तुत की गई। बताया गया परियोजना के तहत 219 किमी की पाइप लाइन व तीन एसटीपी और एक एसपीएस का निर्माण करवाया जाएगा। इसी तरह सरदारशहर के लिए तकनीकी



शुरू, कलेक्टर सभागार में बैठक में खेलो मंत्री राजकुमार रिणवा व कलेक्टर।

सलाहकार फर्म की तरफ से कुल 226.87 करोड़ रुपये की लागत से पानी सप्लाय व शेष रहे सीवरेज कार्य के लिए 140.23 करोड़ रुपये की परियोजना का काम करवाया जाएगा। इसमें पानी की परियोजना के लिए एक 2000 कैपल का सीडक्लुआर व 207 किमी पाइप लाइन डाली जाएगी। सीवरेज परियोजना में एक नया एसटीपी तथा दो पुराने एसटीपी

का प्रसार किए जाने के साथ 82 किमी सीवर लाइन डालना प्रस्तावित है। कलेक्टर आग्वाल ने दोनों कस्बों में सीवरेज लाइन की सफाई के लिए इस योजना में सीवेज जेटिंग मशीन खरीदने का सुझाव दिया। मंत्री रिणवा और रतनगढ़ नगरपालिका के अध्यक्ष इन्द्रकुमार ने सुझाव दिए। अतिरिक्त मुख्य अभियंता प्रदीप राय ने पूरी योजना की जानकारी दी।

### Appendix 28: Sample Grievance Registration Form

(To be available in Hindi and English)

The \_\_\_\_\_ Project welcomes complaints, suggestions, queries and comments regarding project implementation.

Aggravated persons may provide grievance with their name and contact information to enable us to get in touch for clarification and feedback.

In case, someone chooses not to include personal details and wants that the information provided to remain confidential, please indicate by writing/typing \*(CONFIDENTIAL)\* above Grievance Format.

Thank you.

|                                                                                                                                                                                             |  |                              |                   |            |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------|-------------------|------------|--|
| <b>Date</b>                                                                                                                                                                                 |  | <b>Place of registration</b> |                   |            |  |
| <b>Contact Information/Personal Details</b>                                                                                                                                                 |  |                              |                   |            |  |
| <b>Name</b>                                                                                                                                                                                 |  | <b>Gender</b>                | * Male<br>*Female | <b>Age</b> |  |
| <b>Home Address</b>                                                                                                                                                                         |  |                              |                   |            |  |
| <b>Place</b>                                                                                                                                                                                |  |                              |                   |            |  |
| <b>Phone no.</b>                                                                                                                                                                            |  |                              |                   |            |  |
| <b>E-mail</b>                                                                                                                                                                               |  |                              |                   |            |  |
| <b>Complaint/Suggestion/Comment/Question</b> Please provide the details (who, what, where and how) of your grievance below:<br><br>If included as attachment/note/letter, please tick here: |  |                              |                   |            |  |
| <b>How do you want us to reach you for feedback or update on your comment/grievance?</b>                                                                                                    |  |                              |                   |            |  |

#### FOR OFFICIAL USE ONLY

|                                                                                 |           |
|---------------------------------------------------------------------------------|-----------|
| <b>Registered by:</b> (Name of Official registering grievance)                  |           |
| <b>Mode of communication:</b><br><br>Note/Letter<br>E-mail<br>Verbal/Telephonic |           |
| <b>Reviewed by:</b> (Names/Positions of Official(s) reviewing grievance)        |           |
| <b>Action Taken:</b>                                                            |           |
| <b>Whether Action Taken Disclosed:</b>                                          | Yes<br>No |

## Means of Disclosure:

## Appendix 29: Office order for establishing GRM

167

**RUIDP**  
**Government of Rajasthan**  
**Office of Project Director**  
**Rajasthan Urban Infrastructure Development Project**  
 AVS Building, Jawahar Circle, JLN Marg, Jaipur - 302017

Tel No.: 0141-2721966, Fax No.: 0141-2721919, email : mail@ruidp.gov.in, web site : www.ruidp.gov.in  
 F3(301)(50)RUIDP/PMU/PH-IV/WS/GENERAL/ 1282 Dated: 04.2018-04/05/18

**Office - Order**

**Subject:-** Grievance Redress Mechanism for Rajasthan Secondary Town Development Investment Program (RSTDIP) - RUIDP Phase IV

**Reference:-** Agreed Resettlement & Environmental framework -3183 IND (RUIDP Phase III) - <https://www.adb.org/projects/42267-026/main#project-documents>

It is directed that Grievance Mechanism of RUIDP Phase III will be replicated in RUIDP Phase IV and accordingly, PIU will maintain/ ensure proper records of safeguard related Grievances received in their town. PIU will also ensure that the safeguard related Grievances received are resolved as per Grievance Redress Mechanism (GRM) prescribed in RP which is summarized as under (for ready reference):-

| Methodology of multi-tier GRM                                                                                                                                                                                                                                                         | Responsibility/Action to be taken                                                                                                                                          | Time Frame                                                                    | Record Keeping                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <b>1st level:</b><br>Grievances that are immediate and urgent in the perception of the complainant, the contractor, and supervision personnel from PIU will provide the most easily accessible or first level of contact for quick resolution of grievances                           | SE/EE PIU will resolve issues in consultation with supervision personnel/ Contractor.                                                                                      | PIU will resolve issues within 3 days of receipt of a complaint/ grievance.   | The grievance register will be endorsed by all field agencies involved in implementation of EMP and RP.                                 |
| <b>2nd level:</b><br>All grievances that cannot be redressed within 3 days at field will be referred to PMU through PO Social/Environment by PIU.                                                                                                                                     | Project Officers (Environment/Social) PMU in consultation with PMU, PIU and the Contractor will resolve the issues referred.                                               | PMU will resolve issues within 7 days of receipt of a complaint/ grievance.   | PIU will keep records of the matter referred to PMU and will document the outcome of each grievance resolved in the Grievance Register. |
| <b>3rd level:</b><br>All the grievances that are not addressed by PMU within 7 days, will be brought to the notice of Grievance Redress Committee (GRC). The City Level Committee (CLC), which will be established in every project town will act as GRC.                             | SE/EE PIU will coordinate with PO Social/ Environment or other official of PMU and will prepare agenda for the GRC meeting accordingly and ensure keeping the same in GRC. | The GRC will resolve the grievance within 15 days of receiving the complaint. | PIU will be responsible to see through the process of redress of each grievance and document the outcomes.                              |
| <b>4th level:</b><br>Very major issues that are beyond the jurisdictional authority of the CLC or those that have the potential to cause social conflicts or environmental damage or those that remain unresolved at PMU/CLC level, will be referred to the Empowered Committee (EC). | SE/EE PIU will assist PMU officials to prepare agenda for the Empowered committee meeting.                                                                                 |                                                                               | SE/EE PIU will keep records of Empowered committee meeting and will ensure documentation of outcome.                                    |

Please note that an aggrieved person shall have access to the country's legal system at any stage, and accessing the country's legal system can run parallel to accessing the GRM and is not dependent on the negative outcome of the GRM.

PIUs will be responsible to ensure redressal of grievances as per GRM procedures summarized above and intimate to the complainant.

Contractor's will keep information board depicting Grievance registration numbers at each working site. Grievance registration form and will maintain Grievance Registers (refer annexure 1 & 2).

Addl. Project Director, RUIDP  
 Dated: 04.2018  
 04/05/18  
 (K. M. Mandawaria)  
 PO(Co-ord.&Social)

F3(301)(50)RUIDP/PMU/PH-IV/WS/GENERAL/ 1283-84  
 Copy to following for information and necessary action.  
 1) PA to PD /CE /FA/DyPD(A)/SE(WS)/SE(WW)/PO(Environment)/PO(Social)/, RUIDP, Jaipur  
 2) All EE, PIU, Phase-IV for ensuring maintenance of the Grievance register and helpline and for resolving of Grievances.



## Office order for GRC


 Government of Rajasthan  
**Office of Project Director**  
**Rajasthan Urban Infrastructure Development Project (Unit of RUDSICO)**  
 AVS Building, Jawahar Circle, JLN Marg, Jaipur - 302017  
 Tel No.: 0141-2721966, Fax No.: 0141-2721919,  
 email: mailruidp@gmail.com, mail.ruidp@rajasthan.gov.in web site : <https://urban.rajasthan.gov.in/ruidp>  
 No. F3 (301) (60)/RUIDP/PMU/PH-IV/ADB S. Safeguard /Gen adm./2020-21/11364 Date: 18/12/2020

**Suprintending Egnleer/Executive Engineer**

PIU- Abu Road, Sirahi, Ratangarh,  
 Fatehpur, Laxmangarh, Sardarsahar,  
 Kuchaman, Ladnu, Makrana, Didwana,  
 Khetri, Mandawa, Pratapgarh and  
 Banswara.

**Subject:-** Nomination of Safeguard and Safety Officer (SSO) of each PIUs for proper monitoring of Environmental and Resettlement issues and addressing of safeguard related Grievances through Grievance Redress Mechanism.

**Reference:-** Agreed Environmental Resettlement framework and EARF of RSTOSP.

All PIUs are directed to issue an office order to nominate one engineer from PIU to works as Safeguard and Safety Officer (SSO). It will be additional responsibility of Safeguard and Safety Officer (SSO), PIU to ensure day to day monitoring of implementation of Environmental Management and Monitoring Plan (EMMP) provisions, Implementation & Monitoring Resettlement Plan (RP) and ADB Safeguard Policy & Safety compliance in concern town.

Further it is directed that all the PIU should maintain proper separate records of safeguard related Grievances received in their town and ensure that the safeguard related Grievances received are resolved as per Grievance Redress Mechanism (GRM) prescribed in EARF/RF which is summarized as under (for ready reference)

| Methodology of multi-tier GRM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Responsibility/Action to be taken                                                                                                                                                                                                                                                | Time Frame                                                                  | Record Keeping                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                           |  |                    |  |    |        |     |     |      |    |    |     |    |       |       |    |    |    |       |     |    |    |     |       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|--|--------------------|--|----|--------|-----|-----|------|----|----|-----|----|-------|-------|----|----|----|-------|-----|----|----|-----|-------|
| <b>1st level:</b><br>Grievances that are immediate and urgent in the perception of the complainant, the contractor, and supervision personnel from PIU and CMSC on-site will provide the most easily accessible or first level of contact for quick resolution of grievances.                                                                                                                                                                                                                                                                                                                                                               | EE PIU will resolve issues in consultation with supervision personnel (ACM), Safeguard and Safety Officer (SSO) PIU, Contractor, and Safeguard staff of CMSC. If required, city level monitoring committee (CLMC) will be involved in resolution of grievances at the 1st level. | PIU will resolve issues within 7 days of receipt of a complaint/ grievance. | Safeguard Support of CMSC will oversee the matters and prioritize / follow up the issues with PIU/Contractor.<br><br>Safeguard and Safety Officer of PIUs, Safeguard Support of CMSC will record Grievances timely in the format enclosed as Annexure 1.<br><br>Contractor/ Safeguard Support of CMSC will enter the general Grievance received (in a summarized manner) in Grievance Register (format enclosed as Annexure 2) on receipt form public forwarded to head of PIU or Safeguard and Safety Officer (SSO) for resolve in time and provide summarized information as and when require. |                           |  |                    |  |    |        |     |     |      |    |    |     |    |       |       |    |    |    |       |     |    |    |     |       |
| <div style="text-align: center;"> <b>Project Management and Capacity Building Consultancy (PMCB) RSTOSP (RUIDP-IV)</b> </div> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2">Received on<br/>21/12/2020</td> <td colspan="2">Inward No.<br/>1000</td> </tr> <tr> <td>TL</td> <td>NTL/ME</td> <td>GIS</td> <td>SDS</td> </tr> <tr> <td>STRE</td> <td>EE</td> <td>PE</td> <td>GIS</td> </tr> <tr> <td>PS</td> <td>PE/CS</td> <td>PE/MS</td> <td>IF</td> </tr> <tr> <td>CS</td> <td>PE</td> <td>PE/MS</td> <td>APL</td> </tr> <tr> <td>PC</td> <td>CM</td> <td>EM/</td> <td>SGOIA</td> </tr> </table> |                                                                                                                                                                                                                                                                                  |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Received on<br>21/12/2020 |  | Inward No.<br>1000 |  | TL | NTL/ME | GIS | SDS | STRE | EE | PE | GIS | PS | PE/CS | PE/MS | IF | CS | PE | PE/MS | APL | PC | CM | EM/ | SGOIA |
| Received on<br>21/12/2020                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                  | Inward No.<br>1000                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                           |  |                    |  |    |        |     |     |      |    |    |     |    |       |       |    |    |    |       |     |    |    |     |       |
| TL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | NTL/ME                                                                                                                                                                                                                                                                           | GIS                                                                         | SDS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                           |  |                    |  |    |        |     |     |      |    |    |     |    |       |       |    |    |    |       |     |    |    |     |       |
| STRE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | EE                                                                                                                                                                                                                                                                               | PE                                                                          | GIS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                           |  |                    |  |    |        |     |     |      |    |    |     |    |       |       |    |    |    |       |     |    |    |     |       |
| PS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | PE/CS                                                                                                                                                                                                                                                                            | PE/MS                                                                       | IF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                           |  |                    |  |    |        |     |     |      |    |    |     |    |       |       |    |    |    |       |     |    |    |     |       |
| CS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | PE                                                                                                                                                                                                                                                                               | PE/MS                                                                       | APL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                           |  |                    |  |    |        |     |     |      |    |    |     |    |       |       |    |    |    |       |     |    |    |     |       |
| PC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | CM                                                                                                                                                                                                                                                                               | EM/                                                                         | SGOIA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                           |  |                    |  |    |        |     |     |      |    |    |     |    |       |       |    |    |    |       |     |    |    |     |       |
| The grievance register will be endorsed by all field agencies involved in implementation of EMP and                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                  |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                           |  |                    |  |    |        |     |     |      |    |    |     |    |       |       |    |    |    |       |     |    |    |     |       |

| Methodology of multi-tier GRM                                                                                                                                                               | Responsibility/Action to be taken                                                                                                                                                           | Time Frame                                                                                       | Record Keeping                                                                                                                                                               |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>2nd level:</b><br>All grievances that cannot be redressed within 7 days at field/PIU level will be brought to the notice of Zonal PIU headed by Additional Chief Engineer (ACE).         | The ACE at zonal PIU will resolve issues in consultation with SE/EE PIU, assistant safeguard officer (ASO), field level PIU, CMSC, and the contractor.                                      | The ACE at zonal PIU will resolve the grievance within 7 days of receipt of complaint/grievance. | RP.<br>Environmental and Social Safeguards Personal of CMSC will keep all the records referred to zonal PIU and after compilation, all the details will be submitted to PMU. |
| <b>3rd level:</b><br>All the grievances that are not addressed by Zonal PIU within 7 days of receipt will be brought to the notice of the PMU.                                              | Project Officer (Social/Environment) at PMU will resolve the grievance with necessary coordination of Zonal PIU and CMSC and guidance/instruction of additional project director (APD-PMU). | PMU will resolve the grievance within 15 days of receipt of grievance.                           | Safeguard Support of PMCBC will keep all the records referred to PMU.                                                                                                        |
| <b>4th level:</b><br>Grievances not redressed through this process within/at the project level within stipulated time period will be referred to the CLC/grievance redress committee (GRC). | Zonal PIU will inform the CLC regarding any grievances required to be resolved urgently.                                                                                                    | The GRC will resolve the grievance within 15 days of receiving the complaint.                    | Environmental and Social Safeguards Personal of CMSC will keep all the records.                                                                                              |

Please note that an aggrieved person shall have access to the country's legal system at any stage, and accessing the country's legal system can run parallel to accessing the GRM and is not dependent on the negative outcome of the GRM.

PIU Safeguard and Safety Officer (SSO) will monitor the entire process and all decisions taken by the PIU, zonal officers, PMU and GRC and will be communicated to the APs by Safeguard Support of CMSC.

It is also directed that names and contact number of the concerned Safeguard and Safety Officer (SSO) of PIU, contractors, safeguard support staff of CMSC will be posted at all construction sites at visible locations.


All PIUs will ensure timely issuance of order with a copy to Project Officer (Social & Environment), PMU. Further PIUs will be responsible to ensure redressal of grievances as per GRM procedures summarized above.



Chief Engineer, RUIDP

No. F3 (301) (60)/RUIDP/PMU/PH-IV/ Social Safeguard/General Adm./2020-21/ Date: 18/12/2020  
Copy to the following for information and necessary action please:- 18368-76

1. ACE-I & II Phase-IV, RUIDP zone Jaipur & Jodhpur
2. TL, PMCBC, Phase-IV, RUIDP
3. TL CMSC-01/02 Phase-IV, RUIDP zone Jaipur & Jodhpur

  
18/12/2020  
(K. M. Mandawaria)  
PO (Co-ord. & Social)

### Appendix 30: Sample Environmental Site Inspection Checklist

Project Name \_\_\_\_\_  
 Contract Number \_\_\_\_\_

NAME: \_\_\_\_\_ DATE: \_\_\_\_\_  
 TITLE: \_\_\_\_\_ DMA: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_ GROUP: \_\_\_\_\_

WEATHER: \_\_\_\_\_

|                              |                   |  |
|------------------------------|-------------------|--|
| Project<br>Activity<br>Stage | Survey            |  |
|                              | Design            |  |
|                              | Implementation    |  |
|                              | Pre-Commissioning |  |
|                              | Guarantee Period  |  |

| Monitoring Items                                                                         | Compliance |
|------------------------------------------------------------------------------------------|------------|
| <b>Compliance marked as Yes / No / Not applicable (NA) / Partially Implemented (PI)</b>  |            |
| EHS supervisor appointed by contractor and available on site                             |            |
| Construction site management plan (spoils, safety, schedule, equipment etc.,) prepared   |            |
| Traffic management plan prepared                                                         |            |
| Dust is under control                                                                    |            |
| Excavated soil properly placed within minimum space                                      |            |
| Construction area is confined; no traffic/pedestrian entry observed                      |            |
| Surplus soil/debris/waste is disposed without delay                                      |            |
| Construction material (sand/gravel/aggregate) brought to site as & when required only    |            |
| Tarpaulins used to cover sand & other loose material when transported by vehicles        |            |
| After unloading , wheels & undercarriage of vehicles cleaned prior to leaving the site   |            |
| No chance finds encountered during excavation                                            |            |
| Work is planned in consultation with traffic police                                      |            |
| Work is not being conducted during heavy traffic                                         |            |
| Work at a stretch is completed within a day (excavation, pipe laying & backfilling)      |            |
| Pipe trenches are not kept open unduly                                                   |            |
| Road is not completely closed; work is conducted on edge; at least one line is kept open |            |
| Road is closed; alternative route provided & public informed, information board provided |            |
| Pedestrian access to houses is not blocked due to pipe laying                            |            |
| Spaces left in between trenches for access                                               |            |
| Wooden planks/metal sheets provided across trench for pedestrian                         |            |
| No public/unauthorized entry observed in work site                                       |            |

|                                                                                             |                   |
|---------------------------------------------------------------------------------------------|-------------------|
| Children safety measures (barricades, security) in place at works in residential areas      |                   |
| Prior public information provided about the work, schedule and disturbances                 |                   |
| Caution/warning board provided on site                                                      |                   |
| Guards with red flag provided during work at busy roads                                     |                   |
| Workers using appropriate PPE (boots, gloves, helmets, ear muffs etc)                       |                   |
| Workers conducting or near heavy noise work is provided with ear muffs                      |                   |
| Contractor is following standard & safe construction practices                              |                   |
| Deep excavation is conducted with land slip/protection measures                             |                   |
| First aid facilities are available on site and workers informed                             |                   |
| Drinking water provided at the site                                                         |                   |
| <b>Monitoring Items</b>                                                                     | <b>Compliance</b> |
| Toilet facility provided at the site                                                        |                   |
| Separate toilet facility is provided for women workers                                      |                   |
| Workers camps are maintained cleanly                                                        |                   |
| Adequate toilet & bath facilities provided                                                  |                   |
| Contractor employed local workers as far as possible                                        |                   |
| Workers camp set up with the permission of PIU                                              |                   |
| Adequate housing provided                                                                   |                   |
| Sufficient water provided for drinking/washing/bath                                         |                   |
| No noisy work is conducted in the nights                                                    |                   |
| Local people informed of noisy work                                                         |                   |
| No blasting activity conducted                                                              |                   |
| Pneumatic drills or other equipment creating vibration is not used near old/risky buildings |                   |

Signature

\_\_\_\_\_

**Sign off**

\_\_\_\_\_  
Name  
Position

\_\_\_\_\_  
Name  
Position



### Appendix 31: Semi Annual Environmental Monitoring Report Format

#### I. INTRODUCTION

- Overall project description and objectives
- Environmental category as per ADB Safeguard Policy Statement, 2009
- Environmental category of each subproject as per national laws and regulations
- Project Safeguards Team

| Name           | Designation/Office | Email Address | Contact Number |
|----------------|--------------------|---------------|----------------|
| 1. PMU         |                    |               |                |
|                |                    |               |                |
|                |                    |               |                |
|                |                    |               |                |
| 2. PIUs        |                    |               |                |
|                |                    |               |                |
|                |                    |               |                |
|                |                    |               |                |
|                |                    |               |                |
| 3. Consultants |                    |               |                |
|                |                    |               |                |
|                |                    |               |                |
|                |                    |               |                |
|                |                    |               |                |

- Overall project and sub-project progress and status
- Description of subprojects (package-wise) and status of implementation (preliminary, detailed design, on-going construction, completed, and/or O&M stage)

| Package Number | Components/List of Works | Status of Implementation<br>(Preliminary Design/Detailed Design/On-going Construction/Completed/O&M)<br><sup>a</sup> | Contract Status<br>(specify if under bidding or contract awarded) | On-going Construction |                          |
|----------------|--------------------------|----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|-----------------------|--------------------------|
|                |                          |                                                                                                                      |                                                                   | %Physical Progress    | Expected Completion Date |
|                |                          |                                                                                                                      |                                                                   |                       |                          |
|                |                          |                                                                                                                      |                                                                   |                       |                          |
|                |                          |                                                                                                                      |                                                                   |                       |                          |
|                |                          |                                                                                                                      |                                                                   |                       |                          |
|                |                          |                                                                                                                      |                                                                   |                       |                          |
|                |                          |                                                                                                                      |                                                                   |                       |                          |
|                |                          |                                                                                                                      |                                                                   |                       |                          |
|                |                          |                                                                                                                      |                                                                   |                       |                          |
|                |                          |                                                                                                                      |                                                                   |                       |                          |
|                |                          |                                                                                                                      |                                                                   |                       |                          |

<sup>a</sup> If on-going construction, include %physical progress and expected date of completion.

## II. COMPLIANCE STATUS WITH NATIONAL/STATE/LOCAL STATUTORY ENVIRONMENTAL REQUIREMENTS<sup>a</sup>

| Package No. | Subproject Name | Statutory Environmental Requirements <sup>b</sup> | Status of Compliance <sup>c</sup> | Validity if obtained | Action Required | Specific Conditions that will require environmental monitoring as per Environment Clearance, Consent/Permit to Establish <sup>d</sup> |
|-------------|-----------------|---------------------------------------------------|-----------------------------------|----------------------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------|
|             |                 |                                                   |                                   |                      |                 |                                                                                                                                       |
|             |                 |                                                   |                                   |                      |                 |                                                                                                                                       |
|             |                 |                                                   |                                   |                      |                 |                                                                                                                                       |

<sup>a</sup> All statutory clearance/s, no-objection certificates, permit/s, etc. should be obtained prior to award of contract/s. Attach as appendix all clearance obtained during the reporting period. If already reported, specify in the "remarks" column.

<sup>b</sup> Specify (environmental clearance? Permit/consent to establish? Forest clearance? Etc.)

<sup>c</sup> Specify if obtained, submitted and awaiting approval, application not yet submitted.

<sup>d</sup> Example: Environmental Clearance requires ambient air quality monitoring, Forest Clearance/Tree-cutting Permit requires 2 trees for every tree, etc.

## III. COMPLIANCE STATUS WITH ENVIRONMENTAL LOAN COVENANTS

| No. (List schedule and paragraph number of Loan Agreement) | Covenant | Status of Compliance | Action Required |
|------------------------------------------------------------|----------|----------------------|-----------------|
|                                                            |          |                      |                 |
|                                                            |          |                      |                 |
|                                                            |          |                      |                 |

## IV. COMPLIANCE STATUS WITH THE ENVIRONMENTAL MANAGEMENT PLAN (REFER TO EMP TABLES IN APPROVED IEE/S)

- Confirm if IEE/s require contractors to submit site-specific EMP/construction EMPs. If not, describe the methodology of monitoring each package under implementation.

### Package-wise Implementation Status

| Package Number | Components | Design Status (Preliminary Design Stage/Detailed Design Completed) | Final IEE based on Detailed Design              |                                               |                                             |                                            | Site-specific EMP (or Construction EMP) approved by Project Director? (Yes/No) | Remarks |
|----------------|------------|--------------------------------------------------------------------|-------------------------------------------------|-----------------------------------------------|---------------------------------------------|--------------------------------------------|--------------------------------------------------------------------------------|---------|
|                |            |                                                                    | Not yet due (detailed design not yet completed) | Submitted to ADB (Provide Date of Submission) | Disclosed on project website (Provide Link) | Final IEE provided to Contractors (Yes/No) |                                                                                |         |
|                |            |                                                                    |                                                 |                                               |                                             |                                            |                                                                                |         |

|  |  |  |   |  |  |  |  |  |
|--|--|--|---|--|--|--|--|--|
|  |  |  | ) |  |  |  |  |  |
|  |  |  |   |  |  |  |  |  |
|  |  |  |   |  |  |  |  |  |
|  |  |  |   |  |  |  |  |  |
|  |  |  |   |  |  |  |  |  |
|  |  |  |   |  |  |  |  |  |
|  |  |  |   |  |  |  |  |  |
|  |  |  |   |  |  |  |  |  |
|  |  |  |   |  |  |  |  |  |
|  |  |  |   |  |  |  |  |  |

- Identify the role/s of Safeguards Team including schedule of on-site verification of reports submitted by consultants and contractors.
  - For each package, provide name/s and contact details of contractor/s' nodal person/s for environmental safeguards.
  - Include as appendix all supporting documents including **signed** monthly environmental site inspection reports prepared by consultants and/or contractors.
  - With reference to approved EMP/site-specific EMP/construction EMP, complete the table below
    - Provide the monitoring results as per the parameters outlined in the approved EMP (or site-specific EMP/construction EMP when applicable).
    - In addition to the table on EMP implementation, the main text of the report should discuss in details the following items:
      - (i) **Grievance Redress Mechanism.** Provide information on establishment of grievance redress mechanism and capacity of grievance redress committee to address project-related issues/complaints. Include as appendix Notification of the GRM (town-wise if applicable).
      - (ii) **Complaints Received during the Reporting Period.** Provide information on number, nature, and resolution of complaints received during reporting period. Attach records as per GRM in the approved IEE. Identify safeguards team member/s involved in the GRM process. Attach minutes of meetings (ensure English translation is provided).
  - Confirm if any dust was noted to escape the site boundaries and identify dust suppression techniques followed for site/s.
  - Identify muddy water was escaping site boundaries or muddy tracks were seen on adjacent roads.
  - Identify type of erosion and sediment control measures installed on site/s, condition of erosion and sediment control measures including if these were intact following heavy rain;
  - Identify designated areas for concrete works, chemical storage, construction materials, and refueling. Attach photographs of each area.
  - Confirm spill kits on site and site procedure for handling emergencies.
  - Identify any chemical stored on site and provide information on storage condition. Attach photograph.
  - Describe management of stockpiles (construction materials, excavated soils, spoils, etc.). Provide photographs.
  - Describe management of solid and liquid wastes on-site (quantity generated, transport, storage and disposal). Provide photographs.
  - Provide information on barricades, signages, and on-site boards. Provide photographs.
  - Provide information on
- Checking if there are any activities being under taken out of working hours and how that is being managed.

**Summary of Environmental Monitoring Activities (for the Reporting Period)<sup>a</sup>**

| <b>Impacts (List from IEE)</b> | <b>Mitigation Measures (List from IEE)</b> | <b>Parameters Monitored (As a minimum those identified in the IEE should be monitored)</b> | <b>Method of Monitoring</b> | <b>Location of Monitoring</b> | <b>Date of Monitoring Conducted</b> | <b>Name of Person Who Conducted the Monitoring</b> |
|--------------------------------|--------------------------------------------|--------------------------------------------------------------------------------------------|-----------------------------|-------------------------------|-------------------------------------|----------------------------------------------------|
| <b>Design Phase</b>            |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |
| <b>Pre-Construction Phase</b>  |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |
| <b>Construction Phase</b>      |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |
| <b>Operational Phase</b>       |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |
|                                |                                            |                                                                                            |                             |                               |                                     |                                                    |

<sup>a</sup> Attach Laboratory Results and Sampling Map/Locations

### Overall Compliance with CEMP/EMP

| No. | Sub-Project Name | EMP/ CEMP Part of Contract Documents (Y/N) | CEMP/ EMP Being Implemented (Y/N) | Status of Implementation (Excellent/ Satisfactory/ Partially Satisfactory/ Below Satisfactory) | Action Proposed and Additional Measures Required |
|-----|------------------|--------------------------------------------|-----------------------------------|------------------------------------------------------------------------------------------------|--------------------------------------------------|
|     |                  |                                            |                                   |                                                                                                |                                                  |
|     |                  |                                            |                                   |                                                                                                |                                                  |
|     |                  |                                            |                                   |                                                                                                |                                                  |

### V. APPROACH AND METHODOLOGY FOR ENVIRONMENTAL MONITORING OF THE PROJECT

- Brief description on the approach and methodology used for environmental monitoring of each sub-project

### VI. MONITORING OF ENVIRONMENTAL IMPACTS ON PROJECT SURROUNDINGS (ambient air, water quality and noise levels)

- Brief discussion on the basis for monitoring
- Indicate type and location of environmental parameters to be monitored
- Indicate the method of monitoring and equipment to be used
- Provide monitoring results and an analysis of results in relation to baseline data and statutory requirements

*As a minimum the results should be presented as per the tables below.*

#### Air Quality Results

| Site No. | Date of Testing | Site Location | Parameters (Monitoring Results) |                            |                          |                          |
|----------|-----------------|---------------|---------------------------------|----------------------------|--------------------------|--------------------------|
|          |                 |               | PM10<br>µg/m <sup>3</sup>       | PM2.5<br>µg/m <sup>3</sup> | SO2<br>µg/m <sup>3</sup> | NO2<br>µg/m <sup>3</sup> |
|          |                 |               |                                 |                            |                          |                          |
|          |                 |               |                                 |                            |                          |                          |
|          |                 |               |                                 |                            |                          |                          |

#### Surface Water Quality Results

| S.No. | Parameters     | Results           |                   |                   |
|-------|----------------|-------------------|-------------------|-------------------|
|       |                | Location-1 (Name) | Location-2 (Name) | Location-3 (Name) |
| 1.    | pH             |                   |                   |                   |
| 2.    | Turbidity      |                   |                   |                   |
| 3.    | Total Hardness |                   |                   |                   |
| 4.    | DO             |                   |                   |                   |
| 5.    | BOD            |                   |                   |                   |
| 6.    | COD            |                   |                   |                   |
| 7.    | Chloride       |                   |                   |                   |
| 8.    | Iron           |                   |                   |                   |

|     |                         |  |  |  |
|-----|-------------------------|--|--|--|
| 9.  | TSS                     |  |  |  |
| 10. | Arsenic                 |  |  |  |
| 11. | Cadmium                 |  |  |  |
| 12. | Fluoride                |  |  |  |
| 13. | Potassium               |  |  |  |
| 14. | Sodium                  |  |  |  |
| 15. | Calcium                 |  |  |  |
| 16. | Zn                      |  |  |  |
| 17. | Cr <sup>+6</sup>        |  |  |  |
| 18. | Magnesium               |  |  |  |
| 19. | Copper                  |  |  |  |
| 20. | Manganese               |  |  |  |
| 21. | Sulphate                |  |  |  |
| 22. | Cyanide                 |  |  |  |
| 23. | Nitrate                 |  |  |  |
| 24. | Lead                    |  |  |  |
| 25. | Boron                   |  |  |  |
| 26. | Selenium                |  |  |  |
| 27. | Aluminium               |  |  |  |
| 28. | Total residual Chlorine |  |  |  |

### Ground water Quality Results

| S.No. | Parameters        | Results           |                   |                   |
|-------|-------------------|-------------------|-------------------|-------------------|
|       |                   | Location-1 (Name) | Location-2 (Name) | Location-3 (Name) |
| 1.    | pH                |                   |                   |                   |
| 2.    | Total Alkalinity  |                   |                   |                   |
| 3.    | Total Hardness    |                   |                   |                   |
| 4.    | Chloride          |                   |                   |                   |
| 5.    | Iron              |                   |                   |                   |
| 6.    | TDS               |                   |                   |                   |
| 7.    | Arsenic           |                   |                   |                   |
| 8.    | Fluoride          |                   |                   |                   |
| 9.    | Zn                |                   |                   |                   |
| 10.   | Cr+6              |                   |                   |                   |
| 11.   | Copper            |                   |                   |                   |
| 12.   | Manganese         |                   |                   |                   |
| 13.   | Sulphate          |                   |                   |                   |
| 14.   | Phosphate         |                   |                   |                   |
| 15.   | Nitrate           |                   |                   |                   |
| 16.   | Lead              |                   |                   |                   |
| 17.   | Phenolic Compound |                   |                   |                   |

### Noise Quality Results

| Site No. | Date of Testing | Site Location | LA <sub>eq</sub> (dBA) (Monitoring Results) |            |
|----------|-----------------|---------------|---------------------------------------------|------------|
|          |                 |               | Day Time                                    | Night Time |
|          |                 |               |                                             |            |
|          |                 |               |                                             |            |

## VII. ASBESTOS MANAGEMENT

## VIII. SUMMARY OF KEY ISSUES AND REMEDIAL ACTIONS

- Summary of follow up time-bound actions to be taken within a set timeframe.

## APPENDIXES

- Photos
- Summary of consultations
- Copies of environmental clearances and permits
- Sample of environmental site inspection report
- Other

**Appendix 32: Details of land availability, ownership and NOCs for sites**

| <b>Project Component</b>                                   | <b>Location</b>                               | <b>Ownership</b>         | <b>Area required (sq m)</b> | <b>Khasra No.</b> | <b>Remarks</b>                                                                                                                         |
|------------------------------------------------------------|-----------------------------------------------|--------------------------|-----------------------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Construction of STP (1.60 MLD                              | Near Ashoke Circle                            | Gandhi Vidyamandir Trust | 1500                        |                   | Letter moved from Nagar Palika to GVM Trust committee, terms and Conditions for Agreement has been agreed by both (GVM & Nagar Palika) |
| Construction of STP 2.30 MLD                               | At Existing STP Sardarshahar South Campus     | Nagar Palika             | 2070                        | 1                 | Existing STP Sardarshahar South Campus                                                                                                 |
| Construction of 3.40 MLD                                   | Existing STP Sardarshahar North Campus)       | Nagar Palika             | 3060                        | 303               | Existing STP Sardarshahar North Campus)                                                                                                |
| 2.30 MLD capacity - SPS                                    | near BSNL Office                              | Gaushala Committee       | 500                         |                   | Nagar Palika Shardarshahar NOC obtained.                                                                                               |
| 0.65 MLD capacity SPS                                      | IGNP rest House                               | IGNP                     | 500                         |                   | Land transfer from IGNP to Nagar Palika, Sardarshahar is under process.                                                                |
| Clear Water Reservoir- – 2000 KL, pump house, CRMC-1, CCC- | (Existing Campus of PHED at Hanumangarh Road) | PHED                     |                             |                   | Letter moved to PHED                                                                                                                   |
| CRMC-2                                                     | Existing Fire Station Campus                  | Nagar Palika             | 450                         |                   | Land under possession of Nagar Palika, Sardarshahar                                                                                    |



## LETTER OF E.O NAGAR PALIKA TO GAUSALA SAMITI FOR ALLOTMENT OF LAND FOR PROPOSED WORKS

**कार्यालय नगरपालिका, सरदारशहर (जिला बुल)**

PS-11264-321001, 321003P Email: sardarsahar@nagarpalika.com

कार्याक - व.प्र.स./2018/भूमि/ 3788-89 दिनांक : 24/08/2018

श्रीमान, श्रीमान  
गौशाला समिति  
सरदारशहर

विषय :- एसपीएस-1, एसपीएस-2 एवं एसटीपी कार्य हेतु भूमि उपलब्ध करवाने बाबत  
प्रस्ताव :- श्रीमान मुख्य अभियन्ता आरयूआईडीपी का पत्र क्रमांक 4583-85 दिनांक 05-07-18 के सम्बन्ध में  
उपरोक्त विषयान्तर्गत निवेदन है कि श्रीमान मुख्य अभियन्ता आरयूआईडीपी के पत्र क्रमांक 4583-85 दिनांक 05-07-18 के द्वारा इस कार्यालय से निम्नानुसार भूमि की मांग की गयी है :-

| Component | Area/Size   | Location                         |
|-----------|-------------|----------------------------------|
| SPS -1    | 25 m x20 m  | North of Rly.Station Sardarsahar |
| SPS -2    | 25 m x20 m  | Near Nav Jeevan Hospital         |
| STP       | 160 m x160m | Ghantaghar Road                  |

उक्त स्थानों का इस कार्यालय के द्वारा आरयूआईडीपी विभाग के अधिकारियों एवं कर्मचारियों के साथ मीका जॉब करने पर पाया गया कि उक्त स्थानों के आस-पास उक्त माप की नगरपालिका सरदारशहर भूमियाँ उपलब्ध नहीं है । उक्त स्थानों के आस-पास गौशाला समिति सरदारशहर की भूमियाँ स्थित है जिसे एसपीएस-1, एसपीएस-2 एवं एसटीपी कार्य हेतु भूमि उपलब्ध करवायी जा सकती है । अतः आप श्रीमानजी से निवेदन है कि उक्त कार्य हेतु अंकित मापानुसार भूमि उपलब्ध करवाने का श्रम कराये ।

अधिसापी अधिकारी  
नगरपालिका सरदारशहर  
दिनांक :- 24/08/18

क्रि - 3788-89  
लि पि :- श्रीमान मुख्य अभियन्ता आरयूआईडीपी, जयपुर ।

अधिसापी अधिकारी  
नगरपालिका सरदारशहर  
दिनांक :- 24/08/18

### Transcript In English

To  
The President,  
Gausala Committee, Sardarsahar

**Sub-** Provide land for the constrction of 2 nos of SPS and 1 nos of STP

**Ref-**RUIDP letter no-4583-85 dated 05.07.2018

The land required for the above works are as below:

| Component | Area/Size | Location                              |
|-----------|-----------|---------------------------------------|
| SPS-1     | 25*20 m   | North of railway station, Sardarsahar |
| SPS-2     | 25*20 m   | Near Nav Jeevan Hospital              |
| STP       | 160*160 m | Ghantaghar Road                       |


During site visit of RUIDP officials it was noticed that Nagar palika land are not available nearby areas for the above works. Sufficient encumbrance/unproductive land of Gausala committee are available. Thus it is requested to allot/provide the land for the construction of 2 nos of SPS and one nos of STP under RUIDP-Phase 4.

Signed by-

Executive officer,

Nagar Palika, Sardarsahar

**LETTER OF E.O NAGAR PALIKA FOR CONFIRMATION OF AVAILABILITY OF LAND FOR 1 NOS  
OF STP GHANTA GHAR ROAD) AND 2 NOS OF SPS**

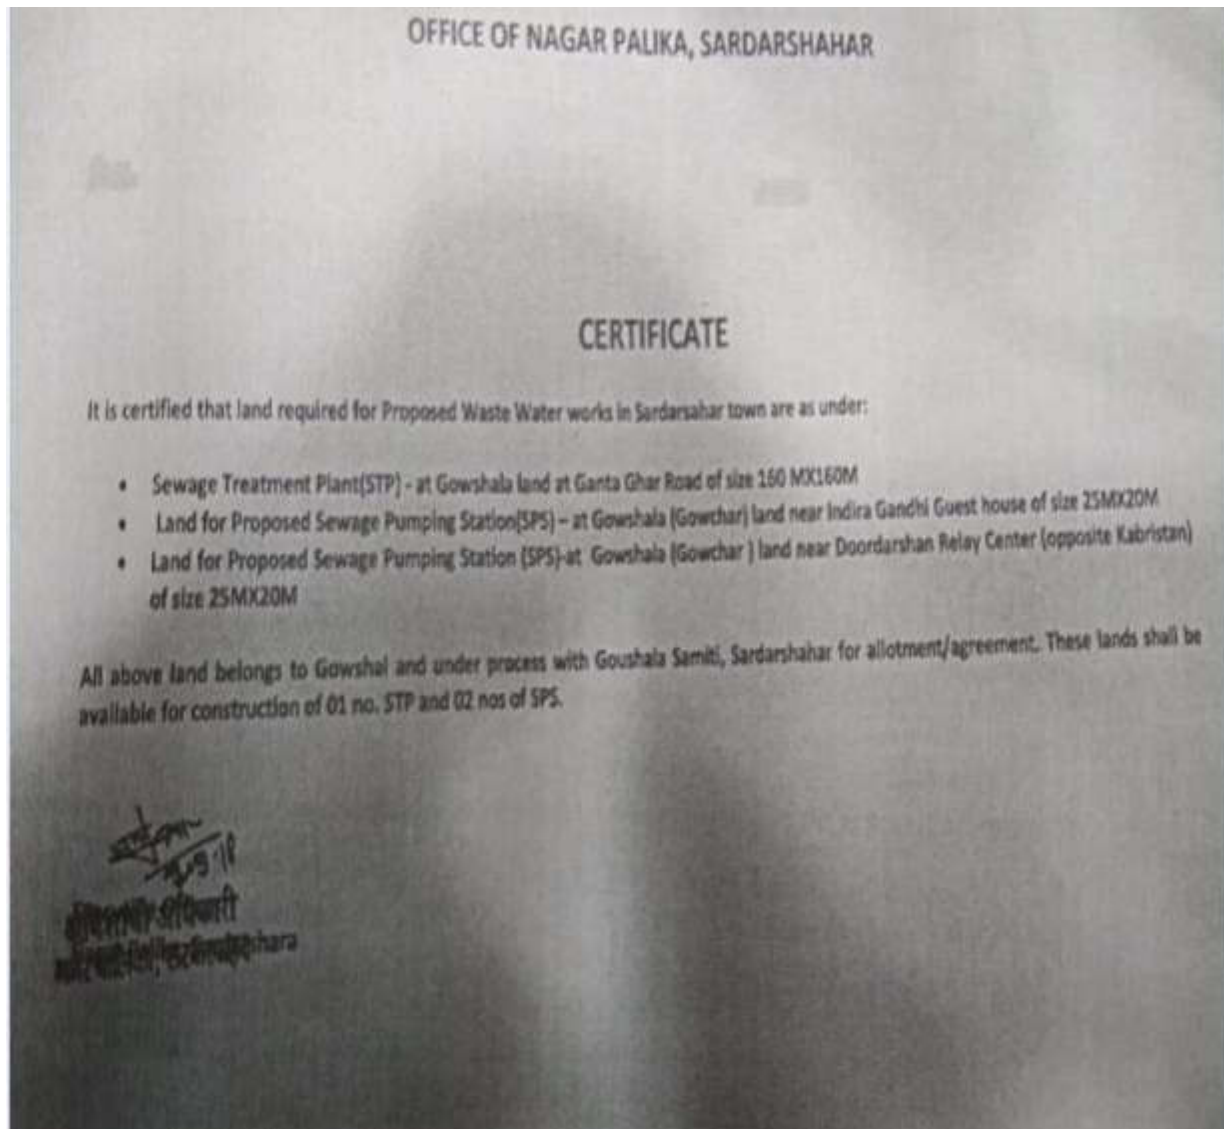

**CONFIRMATION LETTER OF E.O NAGAR PALIKA THAT LAND FOR STP NEAR EXISTING STP AT BOTH SOUTH AND NORTH CAMPUS ARE AVAILABLE**



- **Sewage Treatment Plant(STP) North-**  
 Total land acquired : 32725 Sqm  
 Area Utilized : 19000 Sqm.  
**Land available at present : 13725 Sqm.**  
 (For proposed STP under RUIDP Ph-IV)

- **Sewage Treatment Plant(STP) South-**  
 Total land acquired : 73500 Sqm  
 Area Utilized : 47000 Sqm.  
**Land available at present : 26500 Sqm.**  
 (For proposed STP under RUIDP Ph-IV)

**LETTER OF E.O NAGAR PALIKA TO ED,RUIFDCO REGARDING AVIALABILITY OF LAND IN WHICH IN SOUTH AND NORTH CAMPUS FOR CONSTRUCTION OF 2 NOS OF STP**

## Office of Municipal Board Sardarshahr

Ref :- 1713

date :- 2.7.8.08

To,  
The Executive Director  
RUIFDCO  
Jaipur.

**Sub :- U.I.D.S.S.M.T. scheme Sardar shahr.**

**Ref :- Letter No. RUIFDCO/UIDSSMT/2008-09/2149 dated 20.8.08**

Sir,

Regarding above cited reference for requirement of land for STP. As per details in project report submitted for approval the total land requirement for S.T.P. for phase 1 is 42 Bigha. Only phase 1 is being funded by central govt. The details are given below:

**Land Required for STP (south) ph 1**

Area for facultative (5 nos) ponds -  $345m \times 170m = 58650$

Area for aerobic (3 nos) ponds -  $90m \times 165m = 14850$

Total = 73500 sqm

Say = 29 Bigha

**Land Required for STP (North) ph 1**

Area for facultative ponds (2 nos.) -  $170 \times 170 = 28900$

Area for Anaerobic pond (1 nos.) -  $75 \times 51 = 3825$

Total = 32725


Say - 13 Bigha

Total land Road -  $29+13 = 42$  Bigha

Nagarpalika has submitted agreement for 50 bigha land from goshala. The Phase 1 requirement is only 42 Bigha which is sufficient for construction of STP.

Nagar palika has made an agreement with goshala Sardar shahr to provide 50 Bigha land from khasra No. 1 and 303 respectively. Jamabandi of Shri goshala samiti, Agreement and Certificate is enclosed here with for your perusal please.

Thanking you.

  
Executive Officer  
Municipal Board  
Sardar shahr

**LETTER OF DISTRICT COLLECTOR TO WRD REGARDING TRANSFER OF LAND FOR  
CONSTRUCTION OF SPS- 2 AT IGNP LAND**

राजस्थान सरकार  
कार्यालय जिला कलेक्टर, चूरु (राजस्थान)

क्रमांक:- एफ. 12(2)/राजस्व/2019

1675

दिनांक : 4 नवम्बर, 2019

निमित्त,

श्री नवीन महाजन, IAS  
शासन सचिव,  
जल संसाधन विभाग,  
राज्य जल संसाधन आयोजना विभाग एवं  
इन्दिरा गांधी नहर विभाग, राजस्थान,  
जयपुर

**विषय:-** सरदारशहर तहसील मुख्यालय पर सीवरेज पम्पिंग स्टेशन के निर्माण हेतु आईजीएनपी विश्रामगृह को आवंटित भूमि में से 500 वर्ग मीटर भूमि उपलब्ध करवाये जाने बाबत ।


महोदय,

चूरु जिले के तहसील मुख्यालय सरदारशहर पर नगरपालिका, सरदारशहर द्वारा सीवरेज पम्पिंग स्टेशन बनाये जाने हेतु भूमि आवंटन के संबंध में श्रीमान्जी का ध्यान आकर्षित कर निवेदन करना चाहूंगा कि सरदारशहर तहसील मुख्यालय पर नगरपालिका द्वारा RUIDP (कार्यकारी एजेन्सी) के माध्यम से सीवरेज पम्पिंग स्टेशन के निर्माण हेतु 500 वर्गमीटर की भूमि आवंटित किये जाने हेतु निवेदन किया गया है । इस संबंध में सरदारशहर मुख्यालय पर भूमि उपलब्धता हेतु उपखण्ड अधिकारी व तहसीलदार, सरदारशहर से विचार-विमर्श किया गया है । उपखण्ड अधिकारी, सरदारशहर ने अपने पत्र क्रमांक- राजस्व / 2019 / 1330 दिनांक 30.10.2019 (छाया प्रति संलग्न) के द्वारा अवगत करवाया गया है कि सरदारशहर मुख्यालय पर खसरा नंबर 410/391 तादादी 11 बीघा भूमि पूर्व में नामान्तरकरण सं. 340 दिनांक 27.02.91 के द्वारा इन्दिरा गांधी नहर परियोजना को आवंटित की गयी है, जिस पर वर्तमान में आईजीएनपी विश्रामगृह बना हुआ है ।

भूमि आईजीएनपी विभाग को आवंटित 11 बीघा भूमि पर वर्तमान में सिर्फ विश्रामगृह ही बना हुआ है तथा शेष भूमि रिक्तावस्था में ही है । अतः निवेदन है कि आईजीएनपी विभाग को आवंटित उक्त 11 बीघा भूमि में से दक्षिण-पूर्व दिशा में 500 वर्ग मीटर भूमि (25 x 25 मीटर) सीवरेज पम्पिंग स्टेशन हेतु दिये जाने की स्वीकृति प्रदान कराने का श्रम करें ताकि सरदारशहर मुख्यालय पर सीवरेज की समस्या के स्थायी समाधान हेतु RUIDP के माध्यम से पम्पिंग स्टेशन का निर्माण करवाया जा सके । यहां यह भी निवेदन है कि 500 वर्ग मीटर भूमि पर सीवरेज पम्पिंग स्टेशन के निर्माण करवाये जाने पर विश्रामगृह के दैनिक रख-रखाव व अन्य गतिविधियों पर किसी प्रकार का प्रतिकूल प्रभाव नहीं होगा तथा सीवरेज पम्पिंग स्टेशन के निर्माण के उपरांत भी विश्रामगृह हेतु पर्याप्त भूमि आईजीएनपी विभाग के पास रहेगी ।

अतः निवेदन है कि कृपया सीवरेज पम्पिंग स्टेशन के निर्माण हेतु 500 वर्ग मीटर भूमि (25 x 25 मीटर) जन-हित को ध्यान में रखते हुये उपलब्ध करवाये जाने के संबंध में आवश्यक दिशा-निर्देश आईजीएनपी विभाग के अधिकारियों को जारी कराने का श्रम करावें ताकि सरदारशहर मुख्यालय पर सीवरेज की समस्या का स्थायी समाधान शीघ्र हो सके ।

संलग्न : उपर्युक्तानुसार

भवदीय,  
  
(संलग्न नायक) P.S.  
जिला कलेक्टर, चूरु

Number: - F. 12 (2) / Revenue / 2019/1675 Date: November 4, 2019

To

Shri Naveen Mahajan, IAS  
Government Secretary,  
Water Resources Department,  
State Water Resources Planning Department  
Indira Gandhi Canal Department, Rajasthan,  
Jaipur

Subject: Regarding providing & allotment of 500 square meters of land for the construction of Sewerage Pumping Station at IGNP Rest house in Sardarshahar Tehsil Headquarters

Sir,

With regard to the allocation of land for the construction of sewerage pumping station in Municipality, Sardarshahar at Tehsil Headquarters Sardarshahar in Churu District, I would like to bring to your kind notice and requesting that Municipal Council has requested to allot 500 square meters of land for construction of Sewerage Pumping Station through RUIDP (Executive Agency) at Sardarshahar Tehsil Headquarters. In this regard, discussions have been held with the Sub Divisional Officer and Tehsildar, Sardarshahar for availability of land at Sardarshahar Headquarters. Subdivision officer, Sardarshahar, in his letter number - State / 2019/1330 dated 30.10.2019, It has been conveyed (copy attached) that Khasra No. 410/391 Tadadi 11 Bigha land at Sardarshahar Headquarters Formerly Nomination no. 340 dated 27. 02. 91 has been allocated to Indira Gandhi Canal Project, on which the present IGNP rest house is built. However, on 11 bighas of land allotted to IGNP department, only rest house has been built and the rest of the land is still in vacant.

Therefore, it is requested that out of the above 11 bighas of land allotted to the IGNP department, in the southeast direction, 500 square meters of land (25 x 25 meters) should be sanctioned for the approval of sewerage pumping station for the problem of sewerage at Sardarshahar headquarters. Pumping station can be constructed through RUIDP for permanent solution. Here it is also requested that the construction of sewerage pumping station on 500 square meter land will not have any adverse effect on daily maintenance and other activities and even after construction of sewerage pumping station, enough land for rest house IGNP Will remain with the department.

Therefore, it is requested to kindly undertake to issue necessary direction to officers of IGNP department for providing 500 square meters of land (25 x 25 meters) for the construction of sewerage pumping station in public interest so that a permanent solution to the sewerage problem at the Sardarshahar headquarters could be done at the earliest.

Attached: As mentioned above

IAS

Distt. Collector, Churu

# NOC FOR CONSTRUCTION OF SPS-1 AT GAUSHALA LAND



कार्यालय नगरपालिका, सरदारशहर (जिला चुरु)

Ph. 01564 -220681 , 220030

Email

sonosdr@gmail.com



क्रमांक :- न.पा.स./ 2019-20/2264

दिनांक : 15-10-19

श्रीमान अधिशाषी अभियंता महोदय  
RUIDP, झुन्झुनु।

विषय :- सरदारशहर नगरपालिका क्षेत्र में स्वीकृत/प्रस्तावित योजना PHASE-IV के लिए SPS-I हेतु भूमि के संबंध में।

महोदय

उपरोक्त विषयान्तर्गत निवेदन है कि विभाग द्वारा प्रस्तावित SPS-I भूमि जो कि गौशाला भूमि में स्थित है, हेतु पूर्व में गौशाला समिति द्वारा पत्र क्रमांक 005 दिनांक 04.04.2019 एवं 008 दिनांक 04.05.2019 द्वारा सहमति प्रदान हो चुकी है।

उपरोक्तानुसार उक्त भूमि पर SPS-I निर्माण विभाग द्वारा करवाया जाता है तो कार्यालय नगरपालिका सरदारशहर को आपत्ति नहीं है।

  
अधिशाषी अधिकारी  
नगरपालिका सरदारशहर

To,

The Executive Engineer,  
RUIDP, Jhunjhunu.

Subject: - Regarding SPS-1 land for sanctioned / proposed scheme Phase-IV in Sardarshahar municipal area.

Sir,

under the aforesaid request, SPS 1 proposed by the Department In land which is located in Gaushala land, the Gaushala committee gave consent vide letter number 005 dated 04/04/2019 and 008 dated 04/04/2019.

According to the above, SPS-1 will be done by the Construction Department on the above land, and then the office Municipal Sardarshahar have no objection.

Executive Officer

Municipality Sardarshahar



### NOC from Nagar Palika for construction of CRMC-2 at Fire Station

कार्यालय अधिशाषी अधिकारी नगरपालिका सरदारशहर (धुरु)

क्रमांक: - 1151 दिनांक: - 23.9.2020

अधिशाषी अभियन्ता  
आर.यू.आई.डी.पी.  
सरदारशहर

विषय: सीवरेज एवम् जल आपूर्ति निर्माण कार्य में सी.आर.एम.सी. भवन  
हेतु भूमि उपलब्ध करवाने बावत।

प्रसंग: 1 अधीक्षण अभियन्ता आर.यू.आई.डी.पी. पी.आई.यू. रतनगढ पत्र क्रमांक  
RUIDP/PIU/RTG/296 दिनांक 13.07.2020

2 अधिशाषी अभियन्ता आर.यू.आई.डी.पी. सरदारशहर पत्र क्रमांक -11 दिनांक 17.08.2020

महोदय,

उपरोक्त प्रासंगिक विषयान्तर्गत निवेदन है कि सरदारशहर कस्बे में आर यू आई पी द्वारा  
सीवरेज एवम् जल आपूर्ति निर्माण कार्य में सी आर एम सी भवन का 90वर्ग मीटर क्षेत्रफल  
में निर्माण किये जाने हेतु संलग्न नक्शे के अनुसार अधिशाषी अधिकारी नगरपालिका के  
आवास के पास नगरपालिका अग्निशमन केन्द्र पर निर्माण की सहमति प्रदान की जाती है।  
अतः आर. यू. आई. डी. पी. भवन निर्माण का काम तुरन्त प्रारम्भ करे।

भवदीय  
अधिशाषी अधिकारी  
नगरपालिका सरदारशहर  
सरदारशहर

### Transcript in English

As per letter referenced above, it is hereby informed to you that as proposed by RUIDP for construction of CRMC for sewerage and water supply works in Sardarshahar, 900 sqm. Is available at Fire Station Centre near residence of Executive Officer, Nagar Palika and Nagar Palika gives no objection certificate for proposed works.

Signed by-

Executive Officer  
Nagar Palika, Sardarshahar

**Appendix 33: Agreement for provision of land and use of treated water by  
Gandhi Vidya Mandir**



## गान्धी विद्या मन्दिर

**GVM**

पो. गान्धी विद्या मन्दिर, सरदारशहर, जिला-चूरु, राजस्थान-331403

शिक्षा, समाज कल्याण, ग्राम विकास एवम् अनुसन्धान का अग्रणी संस्थान

सन् 1950 मे (एव) कन्हैयालालजी दूगड (ब्रह्मलीन स्वामी श्री श्रीरामभारणजी महाराज) द्वारा संस्थापित एवं पोषित

No. GVM/2019-20/७६।

Dated: - Feb. 28, 2020

To,  
Executive officer,  
Municipal Board,  
Sardarshahr

**CONSTRUCTION OF & 1.6 MLD STP AT SARDARSHAHR, DISTT – CHURU RAJASTHAN**

1. Gandhi Vidya Mandir (GVM) agrees to provide land in its premises to Municipal Board, Sardarshahr for construction of 1.6 MLD STP. Agreement for the same will be signed subsequently.
2. Treated water of the STP shall be 100% utilized by GVM.
3. In the rainy season, in case of excess treated water, the same shall be disposed off /stored in a nearby pond.

(Ajay Pati Tripathi)  
Brigadier (Retd)  
Secretary  
Gandhi Vidya Mandir

Dated: - Feb. 28, 2020


No. GVM/2019-20/

Copy for information and necessary action:-

01. Executive Engineer, RUIDP, Sardarshahr.
02. Guard File

(Ajay Pati Tripathi)  
Brigadier (Retd)  
Secretary  
Gandhi Vidya Mandir

Appendix 34 Agreement for provision of land for discharge and use of treated water by  
Gaushala Samiti

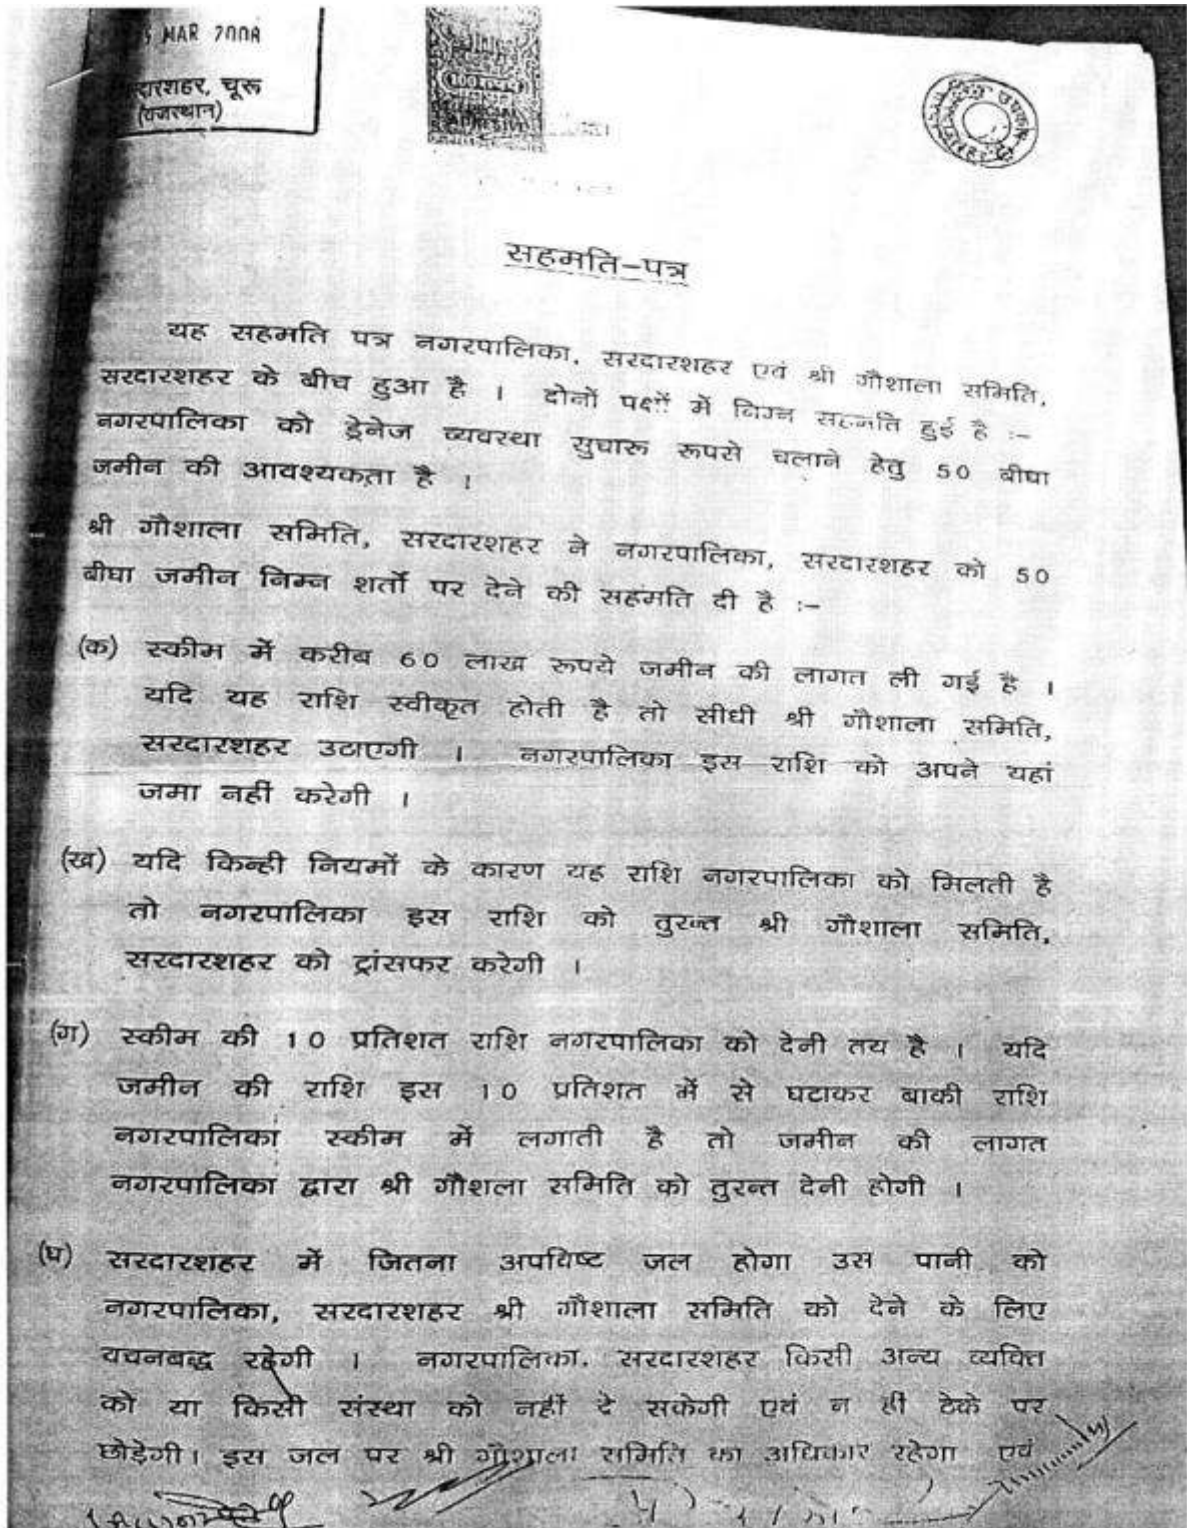


( 2 )


नगरपालिका, सरदारशहर इस पानी को श्री गौशाला समिति के द्वारा नं० 208 में बिना कोई रुकावट के आने देगी एवं श्री गौशाला समिति इस पानी को अपनी हरा चारा एवं अन्य कृषि उपजाने की योजना में काम लेगी । नगरपालिका द्वारा मार्च 2009 तक ठेका दिया हुआ है वो न तो आगे बढ़ाया जायेगा एवं ही कोई नया ठेका पालिका द्वारा भविष्य में दिया जायेगा ।


यदि किसी कारण से यह जमीन नगरपालिका द्वारा उपयोग में नहीं ली जाती है तो श्री गौशाला समिति के द्वारा दी गई जमीन स्वतः ही श्री गौशाला समिति की हो जावेगी एवं श्री गौशाला समिति, नगरपालिका को पत्र द्वारा सूचना देकर जमीन अपने कब्जे में ले लेगी । भविष्य में यदि यह स्कीम बन्द हो जाती है या अन्य जगह स्थानान्तरित हो जाती है, तो भूमि श्री गौशाला समिति की स्वतः ही हो जावेगी ।

किन्हीं कारणों से श्री गौशाला इस पानी को कार्य में नहीं लेती है तो नगरपालिका इस पानी को अन्य किसी को देने में स्वतंत्र रहेगी । श्री गौशाला समिति को चाहिए कि पानी सड़क से नीचे नहीं आये । बरबर पानी दूर मशीनों द्वारा फेंका जाना चाहिए । गौशाला जब तक हरा चारा उत्पादन में पानी लेती रहेगी तब तक गन्दा पानी बीकानेर रोड पर नहीं आने देगी, इसकी जिम्मेवारी गौशाला समिति की रहेगी ।

आज दिनांक 2 अप्रैल 2008 को हम दोनों पक्षधर की तरफ से समझौता किया है, जरूरत पड़ने पर काम आवेंगे ।

  
अध्यक्ष  
नगरपालिका, सरदारशहर  
प्रमुख

  
अधिशोषी अधिकारी  
नगरपालिका सरदारशहर

  
अध्यक्ष  
श्री गौशाला समिति सरदारशहर

**Transcript in English**

**Consent letter**

This consent letter is consent between the Municipal Corporation, Sardarshahar and Shri Gaushala Committee, Sardarshahar. In both the parties have agreed on the following - municipality needs 50 bighas of Jagin to run the trainage system smoothly.

It has been agreed by Shri Gaushala Committee, Sardarshahar to give 50 bighas of land to Municipality, Sardarshahar on the following terms –

(a) The cost of the land is about 60 lakh rupees in the scheme. If this amount is approved, then Sidhi Shri Gaushala Committee will raise Sardarshahar. The municipality will not deposit this amount with itself.

(B) If due to any rules, this amount gets to the municipality. So the municipality will immediately transfer this amount to Shri Gaushala Committee, Sardarshahar.

(C) 10 percent of the scheme is to be given to the municipality. If the amount of land is deducted from this 10 percent and put the remaining amount in the municipal scheme, then the cost of the land will have to be given by the municipality to Shri Gaushala Committee immediately.

(D) The amount of waste water in Sardarshahar. The municipality will remain committed to give Sardarshahar to Shri Gaushala Committee. The municipality, Sardarshahar will not be able to give it to any other person or any organization. Shri Gaushala Committee will have the right over this water.

Nagar palika , Sardarshahar will allow this water to come to Shri Gaushala Committee's plot khasra No. 208 without any complaint and Mr. committee will use this water in its green fodder and other agricultural production scheme. The contract has been awarded by the municipality till 2008 and the contract neither will it be carried forward nor will any new contract be given by the municipality in future.

If for some reason this land is not in use by the municipality, then the land given by the Shri Gaushala Committee will automatically be owned by the Shri Gaushala Committee and the Shri Gaushala Committee will take possession of the land by giving information by letter to the municipality. In future, if this scheme stops or transfers to some other place, the land will be automatically acquired by Shri Gaushala Committee.

If for some reason Mr. Gaushala does not use this water, the municipality will be free to give this water to anyone else. The Shri Gaushala Committee should ensure that the water does not come down the road. Equal water must be thrown away by machines. As long as the cowshed continues to take water in the fodder production, the dirty water will not be allowed to come on Bikaner Road, it will be the responsibility of the Gaushala committee.

On April 2, 2008, we both sides have done signature for future refrence.

|                                                            |                                                                     |                                                                   |                                                                   |
|------------------------------------------------------------|---------------------------------------------------------------------|-------------------------------------------------------------------|-------------------------------------------------------------------|
| <b>-SD-<br/>Chairman<br/>Nagar Palika<br/>Sardarshahar</b> | <b>-SD-<br/>Executive Officer<br/>Nagar Palika<br/>Sardarshahar</b> | <b>-SD-<br/>Chairman<br/>Shri Gawshala Samiti<br/>Sadarshahar</b> | <b>-SD-<br/>Minister<br/>Shri Gawshala Samiti<br/>Sadarshahar</b> |
|------------------------------------------------------------|---------------------------------------------------------------------|-------------------------------------------------------------------|-------------------------------------------------------------------|



Appendix 35: No Objection Certificate (NOC) for discharge of treated water on Gaushala land along with designed reuse plan of Gaushala

150 YEARS OF INDEPENDENCE  
कायालय नगरपालिका, सरदारशहर (जिला चुरू)

Ph. 01564-220681, 220030 Email: [conpsdr@gmail.com](mailto:conpsdr@gmail.com)

कमांक :- न.पा.स/2019-20/ 4823 दिनांक: 28/2/2020

श्रीमान अधिशाषी अभियंता,  
आरयूआईडीपी सरदारशहर।

**विषय :-** साउथ एसटीपी द्वारा संशोधित जल के DISCHARGE के बाबत।

महोदय,

उपरोक्त विषयान्तर्गत अवगत कराना है कि साउथ एसटीपी के पास जो जल भराव है वो विगत कई सालो से व्याप्त है तथा इसका रखरखाव नगरपालिका द्वारा किया जा रहा है। और रोड के साइड पर चार दीवारी का कार्य प्रगति पर है तथा एसटीपी साउथ द्वारा संशोधित जल का 70 प्रतिशत गौशाला समिति तथा 30 प्रतिशत का उपयोग नगरपालिका द्वारा किया जाएगा। किन्ही कारणों से आवश्यकता पडने पर संयोजित जल पास के जल भराव क्षेत्र में अथवा अनुबन्ध अनुसार गौशाला खुली भूमि पर DISCHARGE होता है तो नगर पालिका को इस संबंध में किसी भी प्रकार की आपति नहीं है।

*[Signature]*  
28-02-2020  
अधिशाषी अधिकारी  
नगरपालिका सरदारशहर





**Transcript in English**

**Office of Nagar Palika, Sardarshah (Dist: Churu)**

Ph. 01564 - 22081, 220010

Email: eonpsdr@gmail.com

number: - No. Pa C / 2010 - 20/4823 Dated 28/2/2020

**Mr. Executive Engineer,**

**RUIDP Sardarshahar.**

**Subject: - Regarding DISCHARGE of treated water from South STP.**

Sir,

Under the above subject, it is to be informed that the water filling near South STP has been prevalent for many years and it is being maintained by the municipality. And on road side, The construction of boundary wall is in progress and 70 percent of treated water by STP South will be used by the Gaushala Committee and 30 percent by the municipality. If required, due to any reasons, the treated water is DISCHARGE in the nearby water logged area or according to the contract, the Gaushala is on open land, then the municipality has no objection in this regard.

**-SD-**

**Executive Officer**

**Municipal Board,  
Sardarshahar**



### Appendix 37: IND RSTDSP FFM Environment Action Items Post-Site Visits

| S. N.          | Query                                                                                                                                                                                                                                                                             | Submission                                                                                                                                                                                                                                                                                                                                                                                  |          |          |          |                |                               |          |                |                                                        |          |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|----------|----------------|-------------------------------|----------|----------------|--------------------------------------------------------|----------|
| 1              | Provide written information on area being used as dump site (STP-3 within Gandhi Vindhya University)                                                                                                                                                                              | Area is not a dump site. STP of capacity 1.6 MLD is proposed in the close premises of Ghandhi Vidya Mandir (GVM). No entry is allowed without permission of GVM.<br>Waste water reaching by gravity through open channel to this site of area which is not connected to sewer network (same area is now proposed in RUIDP, Ph-IV) carries the domestic waste too and same is observed site. |          |          |          |                |                               |          |                |                                                        |          |
| 2              | Conduct meaningful consultation with the Committee Stakeholders for the resolution of land to be donated as STP location (STP-3 within Gandhi Vindhya University). The Environment Specialists of both PMU and PPTA should join. Documentation of the agreement must be provided. | NOC for the proposed land for construction of STP has been provided by GVM same is enclosed as Annexure "32" of IEE<br>Further as suggested meaningful detailed consultation Shall be conducted with Stakeholder and consultation report will be submitted                                                                                                                                  |          |          |          |                |                               |          |                |                                                        |          |
| 3              | Provide MOU with the University on the reuse plan of the treated water (STP-3 within Gandhi Vindhya University)                                                                                                                                                                   | GVM have proposed to use 100% quantity of treated water from STP 3 and provided their Consent letter is enclosed as Annexure "32" of IEE<br>MOU is under process and same shall be completed with activity suggested in Sr. no.2 reuse layout plan GVM- Annexure "34 " of IEE                                                                                                               |          |          |          |                |                               |          |                |                                                        |          |
| 4              | Indicate in the lay-out the allocated space for temporary ACM storage                                                                                                                                                                                                             | Complied – enclosed as Annexure "35" of IEE                                                                                                                                                                                                                                                                                                                                                 |          |          |          |                |                               |          |                |                                                        |          |
| 5              | Provide estimate (in tons) of ACM on-site                                                                                                                                                                                                                                         | 51 tons (Approx.)                                                                                                                                                                                                                                                                                                                                                                           |          |          |          |                |                               |          |                |                                                        |          |
| 6              | Provide no objection documentation from owners of the discharge points lands (all STPs)                                                                                                                                                                                           | GVM no objection – Annexure "34"<br>Municipal Board- Annexure "34"<br>Gawshala Samiti- As per MOU enclosed as Annexure "33" of IEE, between Gawshala Samiti and Municipal Board, It is clearly agreed that the unused/excess water shall be discharge in the Gawshala Samiti Land of khasra no 208. Same is proposed as disposal point.                                                     |          |          |          |                |                               |          |                |                                                        |          |
| 7              | Provide MOU with the users of the treated water (all STPs)                                                                                                                                                                                                                        | GVM– Annexure "33" of IEE<br>Gawshala Samiti-Annexure "D"                                                                                                                                                                                                                                                                                                                                   |          |          |          |                |                               |          |                |                                                        |          |
| 8              | Include list of SPS sites to be covered in the O&M scope of the Contractor                                                                                                                                                                                                        | <table> <tr> <th>SPS Name</th><th>Location</th><th>Capacity</th></tr> <tr> <td>SPS -8, Zone-2</td><td>IGNP land at IGNP Guest House</td><td>0.65 MLD</td></tr> <tr> <td>SPS -6, Zone-3</td><td>Near Doordarshan Relay Kendra (S Gawshala Samiti land)</td><td>2.30 MLD</td></tr> </table>                                                                                                   | SPS Name | Location | Capacity | SPS -8, Zone-2 | IGNP land at IGNP Guest House | 0.65 MLD | SPS -6, Zone-3 | Near Doordarshan Relay Kendra (S Gawshala Samiti land) | 2.30 MLD |
| SPS Name       | Location                                                                                                                                                                                                                                                                          | Capacity                                                                                                                                                                                                                                                                                                                                                                                    |          |          |          |                |                               |          |                |                                                        |          |
| SPS -8, Zone-2 | IGNP land at IGNP Guest House                                                                                                                                                                                                                                                     | 0.65 MLD                                                                                                                                                                                                                                                                                                                                                                                    |          |          |          |                |                               |          |                |                                                        |          |
| SPS -6, Zone-3 | Near Doordarshan Relay Kendra (S Gawshala Samiti land)                                                                                                                                                                                                                            | 2.30 MLD                                                                                                                                                                                                                                                                                                                                                                                    |          |          |          |                |                               |          |                |                                                        |          |

## Appendix 37: WHO Interim Guidance on Water, Sanitation, Hygiene and Waste



# Water, sanitation, hygiene, and waste management for the COVID-19 virus

Interim guidance  
19 March 2020

## Background

This interim guidance supplements the infection prevention and control (IPC) documents, by summarizing WHO guidance on water, sanitation and health care waste relevant to viruses, including coronaviruses. It is intended for water and sanitation practitioners and providers and health care providers who want to know more about water, sanitation and hygiene (WASH) risks and practices.

The provision of safe water, sanitation, and hygienic conditions is essential to protecting human health during all infectious disease outbreaks, including the COVID-19 outbreak. Ensuring good and consistently applied WASH and waste management practices in communities, homes, schools, marketplaces, and health care facilities will help prevent human-to-human transmission of the COVID-19 virus.

The most important information concerning WASH and the COVID-19 virus is summarized here.

- Frequent and proper hand hygiene is one of the most important measures that can be used to prevent infection with the COVID-19 virus. WASH practitioners should work to enable more frequent and regular hand hygiene by improving facilities and using proven behavior-change techniques.
- WHO guidance on the safe management of drinking-water and sanitation services applies to the COVID-19 outbreak. Extra measures are not needed. Disinfection will facilitate more rapid die-off of the COVID-19 virus.
- Many co-benefits will be realized by safely managing water and sanitation services and applying good hygiene practices.

Currently, there is no evidence about the survival of the COVID-19 virus in drinking-water or sewage. The morphology and chemical structure of the COVID-19 virus are similar to those of other human coronaviruses for which there are data about both survival in the environment and effective inactivation measures. This document draws upon the evidence base and WHO guidance on how to protect against viruses in sewage and drinking-water. This document will be updated as new information becomes available.

## 1. COVID-19 transmission

There are two main routes of transmission of the COVID-19 virus: respiratory and contact. Respiratory droplets are generated when an infected person coughs or sneezes. Any person who is in close contact with someone who has respiratory symptoms (sneezing, coughing) is at risk of being exposed to potentially infective respiratory droplets.<sup>1</sup> Droplets may also land on surfaces where the virus could remain viable; thus, the immediate environment of an infected individual can serve as a source of transmission (contact transmission).

Approximately 2–10% of cases of confirmed COVID-19 disease present with diarrhoea,<sup>2,4</sup> and two studies detected COVID-19 viral RNA fragments in the faecal matter of COVID-19 patients.<sup>5,6</sup> However, only one study has cultured the COVID-19 virus from a single stool specimen.<sup>7</sup> There have been no reports of faecal-oral transmission of the COVID-19 virus.

## 2. Persistence of the COVID-19 virus in drinking-water, faeces and sewage and on surfaces.

Although persistence in drinking-water is possible, there is no evidence from surrogate human coronaviruses that they are present in surface or groundwater sources or transmitted through contaminated drinking water. The COVID-19 virus is an enveloped virus, with a fragile outer membrane. Generally, enveloped viruses are less stable in the environment and are more susceptible to oxidants, such as chlorine. While there is no evidence to date about survival of the COVID-19 virus in water or sewage, the virus is likely to become inactivated significantly faster than non-enveloped human enteric viruses with known waterborne transmission (such as adenoviruses, norovirus, rotavirus and hepatitis A). For example, one study found that a surrogate human coronavirus survived only 2 days in dechlorinated tap water and in hospital wastewater at 20°C.<sup>8</sup> Other studies concur, noting that the human coronaviruses transmissible gastroenteritis coronavirus and mouse hepatitis virus demonstrated a 99.9% die-off in from 2 days<sup>9</sup> at 23°C to 2 weeks<sup>10</sup> at 25°C. Heat, high or low pH, sunlight, and common disinfectants (such as chlorine) all facilitate die off.

It is not certain how long the virus that causes COVID-19 survives on surfaces, but it seems likely to behave like other coronaviruses. A recent review of the survival of human



coronaviruses on surfaces found large variability, ranging from 2 hours to 9 days.<sup>11</sup> The survival time depends on a number of factors, including the type of surface, temperature, relative humidity, and specific strain of the virus. The same review also found that effective inactivation could be achieved within 1 minute using common disinfectants, such as 70% ethanol or sodium hypochlorite (for details, see Cleaning practices).

### 3. Keeping water supplies safe

The COVID-19 virus has not been detected in drinking-water supplies, and based on current evidence, the risk to water supplies is low.<sup>12</sup> Laboratory studies of surrogate coronaviruses that took place in well-controlled environments indicated that the virus could remain infectious in water contaminated with faeces for days to weeks.<sup>10</sup> A number of measures can be taken to improve water safety, starting with protecting the source water; treating water at the point of distribution, collection, or consumption; and ensuring that treated water is safely stored at home in regularly cleaned and covered containers.

Conventional, centralized water treatment methods that use filtration and disinfection should inactivate the COVID-19 virus. Other human coronaviruses have been shown to be sensitive to chlorination and disinfection with ultraviolet (UV) light.<sup>13</sup> As enveloped viruses are surrounded by a lipid host cell membrane, which is not robust, the COVID-19 virus is likely to be more sensitive to chlorine and other oxidant disinfection processes than many other viruses, such as coxsackieviruses, which have a protein coat. For effective centralized disinfection, there should be a residual concentration of free chlorine of  $\geq 0.5$  mg/L after at least 30 minutes of contact time at pH  $< 8.0$ .<sup>12</sup> A chlorine residual should be maintained throughout the distribution system.

In places where centralized water treatment and safe piped water supplies are not available, a number of household water treatment technologies are effective in removing or destroying viruses, including boiling or using high-performing ultrafiltration or nanomembrane filters, solar irradiation and, in non-turbid waters, UV irradiation and appropriately dosed free chlorine.

### 4. Safely managing wastewater and faecal waste

There is no evidence that the COVID-19 virus has been transmitted via sewerage systems with or without wastewater treatment. Further, there is no evidence that sewage or wastewater treatment workers contracted the severe acute respiratory syndrome (SARS), which is caused by another type of coronavirus that caused a large outbreak of acute respiratory illness in 2003. As part of an integrated public health policy, wastewater carried in sewerage systems should be treated in well-designed and well-managed centralized wastewater treatment works. Each stage of treatment (as well as retention time and dilution) results in a further reduction of the potential risk. A waste stabilization pond (an oxidation pond or lagoon) is generally considered a practical and simple wastewater treatment technology particularly well suited to destroying pathogens, as relatively long retention times (20 days or longer) combined with sunlight, elevated pH levels, biological activity, and other factors serve to accelerate pathogen destruction. A final disinfection step may be considered if existing wastewater treatment plants are not optimized to remove viruses. Best practices for protecting the health of workers at sanitation treatment facilities should

be followed. Workers should wear appropriate personal protective equipment (PPE), which includes protective outerwear, gloves, boots, goggles or a face shield, and a mask; they should perform hand hygiene frequently; and they should avoid touching eyes, nose, and mouth with unwashed hands.

## WASH in health care settings

Existing recommendations for water, sanitation and hygiene measures in health care settings are important for providing adequate care for patients and protecting patients, staff, and caregivers from infection risks.<sup>14</sup> The following actions are particularly important: (i) managing excreta (faeces and urine) safely, including ensuring that no one comes into contact with it and that it is treated and disposed of correctly; (ii) engaging in frequent hand hygiene using appropriate techniques; (iii) implementing regular cleaning and disinfection practices; and (iv) safely managing health care waste. Other important measures include providing sufficient safe drinking-water to staff, caregivers, and patients; ensuring that personal hygiene can be maintained, including hand hygiene, for patients, staff and caregivers; regularly laundering bedsheets and patients' clothing; providing adequate and accessible toilets (including separate facilities for confirmed and suspected cases of COVID-19 infection); and segregating and safely disposing of health care waste. For details on these recommendations, please refer to Essential environmental health standards in health care.<sup>14</sup>

### 1. Hand hygiene practices

Hand hygiene is extremely important. Cleaning hands with soap and water or an alcohol-based hand rub should be performed according to the instructions known as "My 5 moments for hand hygiene".<sup>15</sup> If hands are not visibly dirty, the preferred method is to perform hand hygiene with an alcohol-based hand rub for 20–30 seconds using the appropriate technique.<sup>16</sup> When hands are visibly dirty, they should be washed with soap and water for 40–60 seconds using the appropriate technique.<sup>17</sup> Hand hygiene should be performed at all five moments, including before putting on PPE and after removing it, when changing gloves, after any contact with a patient with suspected or confirmed COVID-19 infection or their waste, after contact with any respiratory secretions, before eating, and after using the toilet.<sup>18</sup> If an alcohol-based hand rub and soap are not available, then using chlorinated water (0.05%) for handwashing is an option, but it is not ideal because frequent use may lead to dermatitis, which could increase the risk of infection and asthma and because prepared dilutions might be inaccurate.<sup>19</sup> However, if other options are not available or feasible, using chlorinated water for handwashing is an option.

Functional hand hygiene facilities should be present for all health care workers at all points of care and in areas where PPE is put on or taken off. In addition, functional hand hygiene facilities should be available for all patients, family members, and visitors, and should be available within 5 m of toilets, as well as in waiting and dining rooms and other public areas.

## 2. Sanitation and plumbing

People with suspected or confirmed COVID-19 disease should be provided with their own flush toilet or latrine that has a door that closes to separate it from the patient's room. Flush toilets should operate properly and have functioning drain traps. When possible, the toilet should be flushed with the lid down to prevent droplet splatter and aerosol clouds. If it is not possible to provide separate toilets, the toilet should be cleaned and disinfected at least twice daily by a trained cleaner wearing PPE (gown, gloves, boots, mask, and a face shield or goggles). Further, and consistent with existing guidance, staff and health care workers should have toilet facilities that are separate from those used by all patients.

WHO recommends the use of standard, well-maintained plumbing, such as sealed bathroom drains, and backflow valves on sprayers and faucets to prevent aerosolized faecal matter from entering the plumbing or ventilation system,<sup>20</sup> together with standard wastewater treatment.<sup>21</sup> Faulty plumbing and a poorly designed air ventilation system were implicated as contributing factors to the spread of the aerosolized SARS coronavirus in a high-rise apartment building in Hong Kong in 2003.<sup>22</sup> Similar concerns have been raised about the spread of the COVID-19 virus from faulty toilets in high-rise apartment buildings.<sup>23</sup> If health care facilities are connected to sewers, a risk assessment should be conducted to confirm that wastewater is contained within the system (that is, the system does not leak) before its arrival at a functioning treatment or disposal site, or both. Risks pertaining to the adequacy of the collection system or to treatment and disposal methods should be assessed following a safety planning approach,<sup>24</sup> with critical control points prioritized for mitigation.

For smaller health care facilities in low-resource settings, if space and local conditions allow, pit latrines may be the preferred option. Standard precautions should be taken to prevent contamination of the environment by excreta. These precautions include ensuring that at least 1.5 m exists between the bottom of the pit and the groundwater table (more space should be allowed in coarse sands, gravels, and fissured formations) and that the latrines are located at least 30 m horizontally from any groundwater source (including both shallow wells and boreholes).<sup>25</sup> If there is a high groundwater table or a lack of space to dig pits, excreta should be retained in impermeable storage containers and left for as long as feasible to allow for a reduction in virus levels before moving it off-site for additional treatment or safe disposal, or both. A two-tank system with parallel tanks would help facilitate inactivation by maximizing retention times, as one tank could be used until full, then allowed to sit while the next tank is being filled. Particular care should be taken to avoid splashing and the release of droplets while cleaning or emptying tanks.

## 3. Toilets and the handling of faeces

It is critical to conduct hand hygiene when there is suspected or direct contact with faeces (if hands are dirty, then soap and water are preferred to the use of an alcohol-based hand rub). If the patient is unable to use a latrine, excreta should be collected in either a diaper or a clean bedpan and immediately and carefully disposed of into a separate toilet or latrine used only by suspected or confirmed cases of COVID-19. In all health care settings, including those with suspected or confirmed COVID-19 cases, faeces must be treated as a biohazard and handled as little as possible. Anyone handling

faeces should follow WHO contact and droplet precautions<sup>18</sup> and use PPE to prevent exposure, including long-sleeved gowns, gloves, boots, masks, and goggles or a face shield. If diapers are used, they should be disposed of as infectious waste as they would be in all situations. Workers should be properly trained in how to put on, use, and remove PPE so that these protective barriers are not breached.<sup>27</sup> If PPE is not available or the supply is limited, hand hygiene should be regularly practiced, and workers should keep at least 1 m distance from any suspected or confirmed cases.

If a bedpan is used, after disposing of excreta from it, the bedpan should be cleaned with a neutral detergent and water, disinfected with a 0.5% chlorine solution, and then rinsed with clean water; the rinse water should be disposed of in a drain or a toilet or latrine. Other effective disinfectants include commercially available quaternary ammonium compounds, such as cetylpyridinium chloride, used according to manufacturer's instructions, and peracetic or peroxyacetic acid at concentrations of 500–2000 mg/L.<sup>26</sup>

Chlorine is ineffective for disinfecting media containing large amounts of solid and dissolved organic matter. Therefore, there is limited benefit to adding chlorine solution to fresh excreta and it is possible that this may introduce risks associated with splashing.

## 4. Emptying latrines and holding tanks, and transporting excreta off-site

There is no reason to empty latrines and holding tanks of excreta from suspected or confirmed COVID-19 cases unless they are at capacity. In general, the best practices for safely managing excreta should be followed. Latrines or holding tanks should be designed to meet patient demand, considering potential sudden increases in cases, and there should be a regular schedule for emptying them based on the wastewater volumes generated. PPE (long-sleeved gown, gloves, boots, masks, and goggles or a face shield) should be worn at all times when handling or transporting excreta off-site, and great care should be taken to avoid splashing. For crews, this includes pumping out tanks or unloading pumper trucks. After handling the waste and once there is no risk of further exposure, individuals should safely remove their PPE and perform hand hygiene before entering the transport vehicle. Soiled PPE should be put in a sealed bag for later safe laundering (see Cleaning practices). Where there is no off-site treatment, in-situ treatment can be done using lime. Such treatment involves using a 10% lime slurry added at 1-part lime slurry per 10 parts of waste.

## 5. Cleaning practices

Recommended cleaning and disinfection procedures for health care facilities should be followed consistently and correctly.<sup>19</sup> Laundry should be done and surfaces in all environments in which COVID-19 patients receive care (treatment units, community care centres) should be cleaned at least once a day and when a patient is discharged.<sup>27</sup> Many disinfectants are active against enveloped viruses, such as the COVID-19 virus, including commonly used hospital disinfectants. Currently, WHO recommends using:

- 70% ethyl alcohol to disinfect small areas between uses, such as reusable dedicated equipment (for example, thermometers);
- sodium hypochlorite at 0.5% (equivalent to 5000 ppm) for disinfecting surfaces.



All individuals dealing with soiled bedding, towels, and clothes from patients with COVID-19 infection should wear appropriate PPE before touching soiled items, including heavy duty gloves, a mask, eye protection (goggles or a face shield), a long-sleeved gown, an apron if the gown is not fluid resistant, and boots or closed shoes. They should perform hand hygiene after exposure to blood or body fluids and after removing PPE. Soiled linen should be placed in clearly labelled, leak-proof bags or containers, after carefully removing any solid excrement and putting it in a covered bucket to be disposed of in a toilet or latrine. Machine washing with warm water at 60–90°C (140–194°F) with laundry detergent is recommended. The laundry can then be dried according to routine procedures. If machine washing is not possible, linens can be soaked in hot water and soap in a large drum using a stick to stir and being careful to avoid splashing. The drum should then be emptied, and the linens soaked in 0.05% chlorine for approximately 30 minutes. Finally, the laundry should be rinsed with clean water and the linens allowed to dry fully in sunlight.

If excreta are on surfaces (such as linens or the floor), the excreta should be carefully removed with towels and immediately safely disposed of in a toilet or latrine. If the towels are single use, they should be treated as infectious waste; if they are reusable, they should be treated as soiled linens. The area should then be cleaned and disinfected (with, for example, 0.5% free chlorine solution), following published guidance on cleaning and disinfection procedures for spilled body fluids.<sup>27</sup>

#### 6. Safely disposing of greywater or water from washing PPE, surfaces and floors.

Current WHO recommendations are to clean utility gloves or heavy duty, reusable plastic aprons with soap and water and then decontaminate them with 0.5% sodium hypochlorite solution after each use. Single-use gloves (nitrile or latex) and gowns should be discarded after each use and not reused; hand hygiene should be performed after PPE is removed. If greywater includes disinfectant used in prior cleaning, it does not need to be chlorinated or treated again. However, it is important that such water is disposed of in drains connected to a septic system or sewer or in a soakaway pit. If greywater is disposed of in a soakaway pit, the pit should be fenced off within the health facility grounds to prevent tampering and to avoid possible exposure in the case of overflow.

#### 7. Safe management of health care waste

Best practices for safely managing health care waste should be followed, including assigning responsibility and sufficient human and material resources to dispose of such waste safely. There is no evidence that direct, unprotected human contact during the handling of health care waste has resulted in the transmission of the COVID-19 virus. All health care waste produced during the care of COVID-19 patients should be collected safely in designated containers and bags, treated, and then safely disposed of or treated, or both, preferably on-site. If waste is moved off-site, it is critical to understand where and how it will be treated and destroyed. All who handle health care waste should wear appropriate PPE (boots, apron, long-sleeved gown, thick gloves, mask, and goggles or a face shield) and perform hand hygiene after removing it. For more information refer to the WHO guidance, Safe management of wastes from health-care activities.<sup>28</sup>

### Considerations for WASH practices in homes and communities.

Upholding best WASH practices in the home and community is also important for preventing the spread of COVID-19 and when caring for patients at home. Regular and correct hand hygiene is of particular importance.

#### 1. Hand hygiene

Hand hygiene in non-health care settings is one of the most important measures that can prevent COVID-19 infection. In homes, schools and crowded public spaces – such as markets, places of worship, and train or bus stations – regular handwashing should occur before preparing food, before and after eating, after using the toilet or changing a child's diaper, and after touching animals. Functioning handwashing facilities with water and soap should be available within 5 m of toilets.

#### 2. Treatment and handling requirements for excreta.

Best WASH practices, particularly handwashing with soap and clean water, should be strictly applied and maintained because these provide an important additional barrier to COVID-19 transmission and to the transmission of infectious diseases in general.<sup>17</sup> Consideration should be given to safely managing human excreta throughout the entire sanitation chain, starting with ensuring access to regularly cleaned, accessible, and functioning toilets or latrines and to the safe containment, conveyance, treatment, and eventual disposal of sewage.

When there are suspected or confirmed cases of COVID-19 in the home setting, immediate action must be taken to protect caregivers and other family members from the risk of contact with respiratory secretions and excreta that may contain the COVID-19 virus. Frequently touched surfaces throughout the patient's care area should be cleaned regularly, such as bedside tables, bed frames and other bedroom furniture. Bathrooms should be cleaned and disinfected at least once a day. Regular household soap or detergent should be used for cleaning first and then, after rinsing, regular household disinfectant containing 0.5% sodium hypochlorite (that is, equivalent to 5000 ppm or 1-part household bleach with 5% sodium hypochlorite to 9 parts water) should be applied. PPE should be worn while cleaning, including mask, goggles, a fluid-resistant apron, and gloves,<sup>29</sup> and hand hygiene with an alcohol-based hand rub or soap and water should be performed after removing PPE.

### References

1. Coronavirus disease (COVID-19) advice for the public. Geneva: World Health Organization; 2020 (<https://www.who.int/emergencies/diseases/novel-coronavirus-2019/advice-for-public>, accessed 3 March 2020).
2. Huang C, Wang Y, Li X, Ren L, Zhao J, Hu Y, et al. Clinical features of patients infected with 2019 novel coronavirus in Wuhan, China. *Lancet*. 2020;395:497–506. doi:10.1016/S0140-6736(20)30183-5.

3. Chen N, Zhou M, Dong X, Qu J, Gong F, Han Y, et al. Epidemiological and clinical characteristics of 99 cases of 2019 novel coronavirus pneumonia in Wuhan, China: a descriptive study. *Lancet*. 2020;395:507–13. doi:10.1016/S0140-6736(20)30211-7.
4. Wang D, Hu B, Hu C, Zhu F, Liu X, Zhang J, et al. Clinical characteristics of 138 hospitalized patients with 2019 novel coronavirus-infected pneumonia in Wuhan, China. *JAMA*. 2020. Feb 7. doi:10.1001/jama.2020.1585.
5. Xiao E, Tang M, Zheng Y, Li C, He J, Hong H, et al. Evidence for gastrointestinal infection of SARS-CoV-2. *medRxiv*. doi:10.1101/2020.02.17.20023721.
6. Holshue ML, DeBolt C, Lindquist S, Lofy KH, Wiesman J, Bruce H et al. for the Washington State 2019-nCoV Case Investigation Team. First case of 2019 novel coronavirus in the United States. *N Engl J Med*. 2020. Jan 31. doi:10.1056/NEJMoA2001191.
7. Zhang Y, Chen C, Zhu S et al. [Isolation of 2019-nCoV from a stool specimen of a laboratory-confirmed case of the coronavirus disease 2019 (COVID-19)]. *China CDC Weekly*. 2020;2(8):123–4. (In Chinese.)
8. Wang XW, Li JS, Zhen B, Kong QX, Song N, Xiao WJ et al. Study on the resistance of severe acute respiratory syndrome-associated coronavirus. *J Virol Methods*. 2005;126:171–7. doi:10.1016/j.jviromet.2005.02.005.
9. Gundy P, Gerba CP, Pepper IL. Survival of coronaviruses in water and wastewater. *Food Environ Virol*. 2009;1:10–14. doi:10.1007/s12560-008-9001-6.
10. Casanova L, Rutala WA, Weber DJ, Sobsey MD. Survival of surrogate coronaviruses in water. *Water Res*. 2009;43(7):1893–8. doi:10.1016/j.watres.2009.02.002.
11. Kampf G, Todt D, Pfaender S, Steinmann E. Persistence of coronaviruses on inanimate surfaces and their inactivation with biocidal agents. *J Hosp Infect*. 2020;104(3):246–51. doi:10.1016/j.jhin.2020.01.022.
12. Guidelines for drinking-water quality, fourth edition, incorporating the first addendum. Geneva: World Health Organization; 2017. (<http://apps.who.int/iris/bitstream/10665/254637/1/9789241549950-eng.pdf>, accessed 3 March 2020).
13. SARS-CoV-2 – water and sanitation. Adelaide: Water Research Australia; 2020. ([http://www.waterra.com.au/r9544/media/system/attachment/file/2199/WaterRA\\_FS\\_Coronavirus\\_V10.pdf](http://www.waterra.com.au/r9544/media/system/attachment/file/2199/WaterRA_FS_Coronavirus_V10.pdf), accessed 3 March 2020).
14. Essential environmental health standards in health care. Geneva: World Health Organization; 2008. ([https://apps.who.int/iris/bitstream/handle/10665/43767/9789241547239\\_eng.pdf?sequence=1&isAllowed=y](https://apps.who.int/iris/bitstream/handle/10665/43767/9789241547239_eng.pdf?sequence=1&isAllowed=y), accessed 3 March 2020).
15. My 5 moments for hand hygiene. In: WHO/Infection prevention and control [website]. Geneva: World Health Organization; 2020. (<https://www.who.int/infection-prevention/campaigns/clean-hands/5moments/en/>, accessed 3 March 2020).
16. Siddharta A, Pfaender S, Vielle NJ, Dijkman R, Friesland M, Becker B, et al. Virucidal activity of World Health Organization-recommended formulations against enveloped viruses, including Zika, Ebola, and emerging coronaviruses. *J Infect Dis*. 2017;215(6):902–6. doi:10.1093/infdis/jix046.
17. WHO guidelines on hand hygiene in health care settings. Geneva: World Health Organization; 2009. ([https://apps.who.int/iris/bitstream/handle/10665/44102/9789241597906\\_eng.pdf?sequence=1&isAllowed=y](https://apps.who.int/iris/bitstream/handle/10665/44102/9789241597906_eng.pdf?sequence=1&isAllowed=y), accessed 3 March 2020).
18. Infection prevention and control during health care when novel coronavirus (nCoV) infection is suspected: interim guidance, 25 January 2020. Geneva: World Health Organization. ([https://www.who.int/publications-detail/infection-prevention-and-control-during-health-care-when-novel-coronavirus-\(ncov\)-infection-is-suspected-20200125](https://www.who.int/publications-detail/infection-prevention-and-control-during-health-care-when-novel-coronavirus-(ncov)-infection-is-suspected-20200125), accessed 3 March 2020).
19. Q&A on infection prevention and control for health care workers caring for patients with suspected or confirmed 2019-nCoV. In: WHO/Newsroom. [website]. Geneva: World Health Organization; 2020. (<https://www.who.int/news-room/q-a-detail/q-a-on-infection-prevention-and-control-for-health-care-workers-caring-for-patients-with-suspected-or-confirmed-2019-ncov>, accessed 3 March 2020).
20. Health aspects of plumbing. Geneva: World Health Organization; 2006. (<https://apps.who.int/iris/handle/10665/43423>, accessed 3 March 2020).
21. Guidelines on sanitation and health. Geneva: World Health Organization; 2018. (<https://apps.who.int/iris/bitstream/handle/10665/274939/9789241514705-eng.pdf?ua=1>, accessed 3 March 2020).
22. Yu ITS, Li Y, Wong TW, Tam W, Chan A, Lee JHW, et al. Evidence of airborne transmission of the severe acute respiratory syndrome virus. *N Engl J Med*. 2004;350(17):1731–9. doi:10.1056/NEJMoA032867.
23. Regan H. How can the coronavirus spread through bathroom pipes? Experts are investigating in Hong Kong. CNN. 12 February 2020. (<https://edition.cnn.com/2020/02/12/asia/hong-kong-coronavirus-pipes-intl-hnk/index.html>).
24. Sanitation safety planning: manual for safe use and disposal of wastewater, greywater and excreta. Geneva: World Health Organization; 2015. (<https://apps.who.int/iris/handle/10665/171753>, accessed 3 March 2020).
25. How to put on and take off personal protective equipment. Geneva: World Health Organization; 2008. (<https://apps.who.int/iris/handle/10665/70066>, accessed 3 March 2020).
26. Chemical disinfectants: guideline for disinfection and sterilization in healthcare facilities (2008). In: CDC/Infection Control [website]. Atlanta: US Centers for Disease Control and Prevention; 2019. (<https://www.cdc.gov/infectioncontrol/guidelines/disinfection/disinfection-methods/chemical.html>, accessed 3 March 2020).



27. Best practices for environmental cleaning in healthcare facilities in resource-limited settings. Atlanta: US Centers for Disease Control and Prevention; 2019.  
(<https://www.cdc.gov/hai/pdfs/resource-limited/environmental-cleaning-508.pdf>, accessed 3 March 2020).
28. Safe management of wastes from health-care activities: a summary. Geneva: World Health Organization; 2017.  
(<https://apps.who.int/iris/handle/10665/259491>, accessed 3 March 2020).
29. Home care for patients with suspected novel coronavirus (COVID-19) infection presenting with mild symptoms, and management of their contacts: interim guidance, 4 February 2020.  
([https://www.who.int/publications-detail/home-care-for-patients-with-suspected-novel-coronavirus-\(ncov\)-infection-presenting-with-mild-symptoms-and-management-of-contacts](https://www.who.int/publications-detail/home-care-for-patients-with-suspected-novel-coronavirus-(ncov)-infection-presenting-with-mild-symptoms-and-management-of-contacts), accessed 3 March 2020).

US Centers for Disease Control and Prevention, United States of America; David Berendes, US Centers for Disease Control and Prevention, United States of America; Lisa Casanova, Georgia State University, United States of America; David Cunliffe, SA Health, Australia; Rick Gelting, US Centers for Disease Control and Prevention, United States of America; Dr Thomas Handzel, US Centers for Disease Control and Prevention, United States of America; Paul Hunter, University of East Anglia, United Kingdom; Ans Maria de Roda Husman, National Institute for Public Health and the Environment, the Netherlands; Peter Maes, Médecins Sans Frontières, Belgium; Molly Patrick, US Centers for Disease Control and Prevention, United States of America; Mark Sobsey, University of North Carolina-Chapel Hill, United States of America.

WHO continues to monitor the situation closely for any changes that may affect this interim guidance. Should any factors change, WHO will issue a further update. Otherwise, this interim guidance document will expire 2 years after the date of publication.

### Contributors

This interim guidance was written by staff from WHO and UNICEF. In addition, a number of experts and WASH practitioners contributed. They include Matt Ardiano,

© World Health Organization 2020. Some rights reserved. This work is available under the [CC BY-NC-SA 3.0 IGO](https://creativecommons.org/licenses/by-nc-sa/3.0/) licence.

WHO reference number: WHO/2019-nCoV/IPC\_WASH/2020.2

### **Appendix 38: Site Visit Report and Due Diligence for Ongoing Construction works in Sardarshahar**

Site visit of Sardarshahar was conducted in the month of December 2020, for the orientation of PIU, consultant and contractor's team in town regarding requirements of environmental safeguard during project implementation, visit of sites for updating the IEE and RP and visit of proposed pipe laying project sites for the compliance of ADB SPS. Following is the observations of site visit-

#### **Report on Orientation for Environmental Safeguard Compliance at Sardarshahar**

**Date:** 24.12.2020, 01.30 pm to 2.30 pm

**Place:** Contractor's Office at Sardarshahar

**Orientation done by:** Mr. Abhay Srivastava, Environmental Safeguard Specialist, PMCBC, Jaipur

**Participants:** following participants were present during orientation-

|                    |                                                                                                 |
|--------------------|-------------------------------------------------------------------------------------------------|
| <b>PIU:</b>        | 1. Mr. Dinesh Kumar, Junior Engineer, PIU, Sardarshahar                                         |
| <b>CMSC-2:</b>     | 1. Mr. Amardeep Singh, Senior Construction Engineer                                             |
|                    | 2. Mr. Amit Bhardwaj, Social Safeguard Support                                                  |
|                    | 3. Mr. Abhishek Bansal, Support Engineer                                                        |
| <b>Contractor:</b> | 1. Mr. Rishi Kumar Sakale, Project Manager                                                      |
|                    | 2. Mr. Rakesh Kumar Sahu, HSE Officer                                                           |
|                    | 3. Mr. Vinay Kumar Pathak, IR Officer                                                           |
|                    | 4. Mr. Dayanand Verma, QA/QC Engineer                                                           |
|                    | 5. Mr. Purvendra Kumar, Mr. Sandeep, Planning engineer                                          |
|                    | 6. Mr. Pradeep Koli, Accounts in-charge                                                         |
|                    | 7. Mr. Bharat Singh                                                                             |
|                    | 8. Mr. Amit Kumar, Mr. Raja Saha, Site Engineer                                                 |
|                    | 9. Mr. Anil Kumar Pareek, Mr. Sandeep Kumar, Ms. Sunaina Sharma, Ms. Pooja Solanki, SOT members |

**Attendance Sheet of Orientation program is attached as Appendix 1 with this report.**

**Photographs of orientation program is attached as Appendix 2.**

**Topics Discussed:** A presentation was given by Environmental Safeguard Specialist, PMCBC, Jaipur to all participants covering following topics-

1. ADB SPS 2009 and RUIDP safeguards requirements
2. Contractual and legal requirements as per ADB, RUIDP, Govt. of Rajasthan and Govt. of India legislations, requirement of consents (CTE/CTO) from RSPCB for WTP/STP/DG set etc.,
3. Safeguard provisions in contract documents, pre-construction requirements
4. Safeguards implementation arrangements and roles and responsibility of different functionaries in the project
5. Assessment of environmental impacts and planning for mitigation measures, including best management practices, in the design, construction, operation and maintenance of water supply subprojects
6. Preparation, updating and review of IEE

7. Preparation of site-specific EMPs/EHS Plan
8. Occupational and community health and safety
9. Labor and public safety and labor laws
10. Heritage conservation, Biodiversity conservation, Asbestos Management
11. Solid waste (domestic, construction and demolition wastes) management
12. Environmental monitoring including air, noise, water and soil
13. Preparation of monitoring checklists and reports
14. Areas of safety concerns in construction works
15. Public consultations and grievance redress mechanism of RUIDP
16. Good practices, labor camp management, tree plantations
17. Probable pollutions during construction works and their mitigation measures
18. Discussions about site visit observations

## Appendix-1 Attendance Sheet of Orientation program

(1)

**ATTENDANCE SHEET**

Town: Sardassahar  
 Project: Water Supply and Sewerage  
 Date: 24.12.2020  
 Subject: Orientation of PIU, Consultants and Contractor for Social and Environmental Safeguards

| S.No. | Name            | Designation                    | Mobile and email | Signature |
|-------|-----------------|--------------------------------|------------------|-----------|
| 1     | Dinesh Kumar    | P.E. RUIOP                     | 9462254563       |           |
| 2     | AMARDEEP SINGH  | SCE, CMSC-II                   | 8716010092       |           |
| 3     | WINAY K. PATHAK | IR Executive<br>L&T            | 9116132113       |           |
| 4     | AMITBHARDWAS    | SOCIAL SAFEGUARDS<br>PIU-RUIOP | 9719628073       |           |
| 5     | Abhishek Bansal | Support Engineer<br>CMSC-II    | 8005843693       |           |
| 6     | Amit K. Pareek  | Sot, L&T                       | 9414437004       |           |
| 7     | Punaina Sharma  | Sot member<br>L&T              | 9960572655       |           |
| 8     | Pooja Salunkhe  | Sot member<br>L&T              | 7737956904       |           |
| 9     | Sandeep Kumar   | SOT member                     | 997293153244     |           |
| 10    | Dejanand Sharma | GA/CC L&T                      | 9079883001       |           |
| 11    | Premendra Kumar | Planner L&T                    | 7355120113       |           |
| 12    | Roshan Mishra   | IR                             | 8527808565       |           |
| 13    | Pradeep Koli    | Accounts                       | 8104528338       |           |
| 14    | Amit Kumar      | Executive L&T                  | 7073260777       |           |
| 15    | Raja Saha       | Executive, L&T                 | 7503766316       |           |

Signature of PMCBC:

Signature of PIU:

Page 1 of 2

(2)

Attendance SheetPlace: Sasdarshahar Date: 24.12.2020Topic/Issue Discussed: Orientation for Social and Environmental Safeguards

| S. no. | Name              | Occupation  | Mobile Number | Signature       |
|--------|-------------------|-------------|---------------|-----------------|
| 16.    | Bhanak Singh      | am.         | 7440443448    | Bhanak Singh    |
| 17.    | Sandeep Chh (L&T) | Planning    | 7381072346    | Sandeep Chh     |
| 18.    | Rakesh Kumar Sahu | E.H.S (L&T) | 7230020725    | R.M.            |
| 19.    | Sunaina Sharma    | SoT (L&T)   | 9960572655    | Sunaina Sharma  |
| 20.    | Pooja Sanket      | SoT (L&T)   | 7739356304    | Pooja           |
|        | Rishi K. Sanket   | P.M., (L&T) | 9996549886    | Rishi K. Sanket |
|        |                   |             |               |                 |
|        |                   |             |               |                 |
|        |                   |             |               |                 |
|        |                   |             |               |                 |
|        |                   |             |               |                 |
|        |                   |             |               |                 |
|        |                   |             |               |                 |
|        |                   |             |               |                 |
|        |                   |             |               |                 |
|        |                   |             |               |                 |
|        |                   |             |               |                 |

## Appendix 2- Photographs of Orientation program



**Sites Visited-** Following sites were visited by PMCBC Environmental Safeguards Expert-


### Environmental Impact Assessment of Proposed sites for construction of CRMCs:

**Proposed CRMC site at Fire Station-** Proposed site for CRMC-1 is within the campus of existing fire station. There are some new dustbins, metal and other scraps stored at site which are proposed to be shifted to other site by Municipal Council before start of construction works. There is one Pipal Tree present at site. All efforts should be made to save this tree and if it is required to be cut in unavoidable circumstances, prior tree cutting permission from concerned authority to be taken and compensatory plantation in the ratio of 1:3 should be done as per RUIDP policy. Site is having approach road, boundary wall and gate. There are existing fire vehicles standing under the shed and 2 staff quarters for firemen and workers. NOC is given by Nagar Palika for proposed work at this site.






**Proposed CRMC site at PHED Exn. office campus-** Proposed site of CRMC along with CWR, Pump House, CCC and MCC is within the campus of PHED at Hanumangarh Road . This site belongs to PHED and suitable for construction of CRMC. There are no habitations near the proposed site. There is also existing CWR, pump house and PHED Office working in this campus therefore all the precautions should be taken to reduce/avoid any adverse impact to the people and staff visiting this office during time of construction works. There are few trees of Babool and Khejri present at site. All efforts should be made to save these trees and if any of these is required to be cut in unavoidable circumstances, prior tree cutting permission from concerned authority to be taken and compensatory plantation in the ratio of 1:3 should be done as per RUIDP policy. Site demarcation is not done till now.

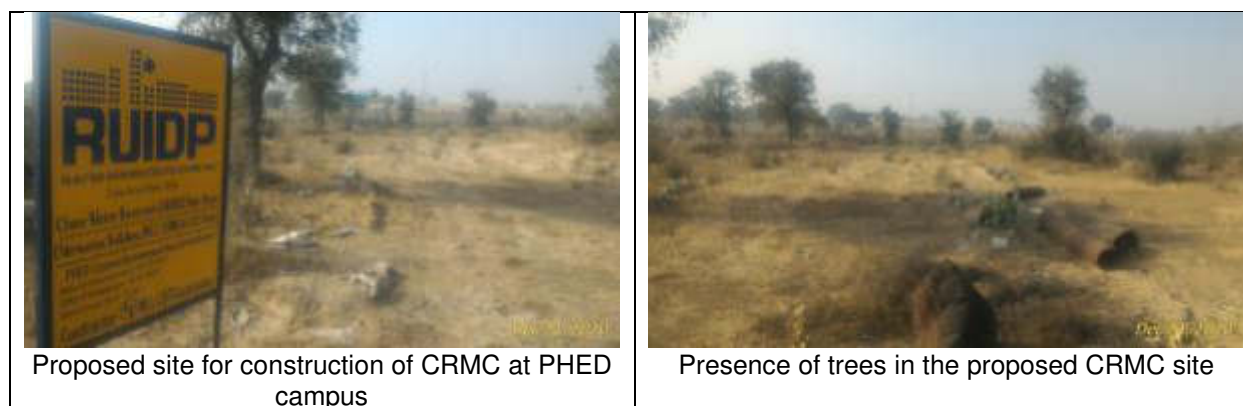


**Due Diligence of compliance of environmental safeguards:** Following is the compliance status of environmental safeguards -

1. Site specific EHS plan has been recently submitted by contractor, which is under review by consultants, in the meanwhile contractor has assured to follow the EMP as suggested in IEE and bid documents.
2. Contractor has mobilized full time EHS officer at site
3. Application for Consent to Establish for proposed STPs (2.3 MLD & 3.4 MLD) are in process. Application for STP 1.6 MLD will be done when land will be handed over to RUIDP from Gandhi Vidya Mandir Trust. No works has been started in STPs and SPSs and it was instructed to contractor that no physical works should be started before CTE is obtained
4. No tree cutting was done for proposed laying works and contractor was informed to access the requirement of tree cutting and take prior permission before any tree cutting
5. During consultation with nearby habitants, it was noted that social outreach team of contractor have consulted the nearby habitants about the nature of works and pamphlets of proposed project was also circulated in the area and people are well aware about the works to be carried out
6. Though project information was given by contractor to nearby habitants, project information boards are not provided at site and it was instructed to contractor to provide project information board at each site. It was informed by contractor's representative that boards are under preparation and shall be provided at site soon.
7. Contractor was instructed to provide first aid box, site order book, labour attendance register, grievance registration form/ complaint register, mobile toilets etc. before commencing works at site

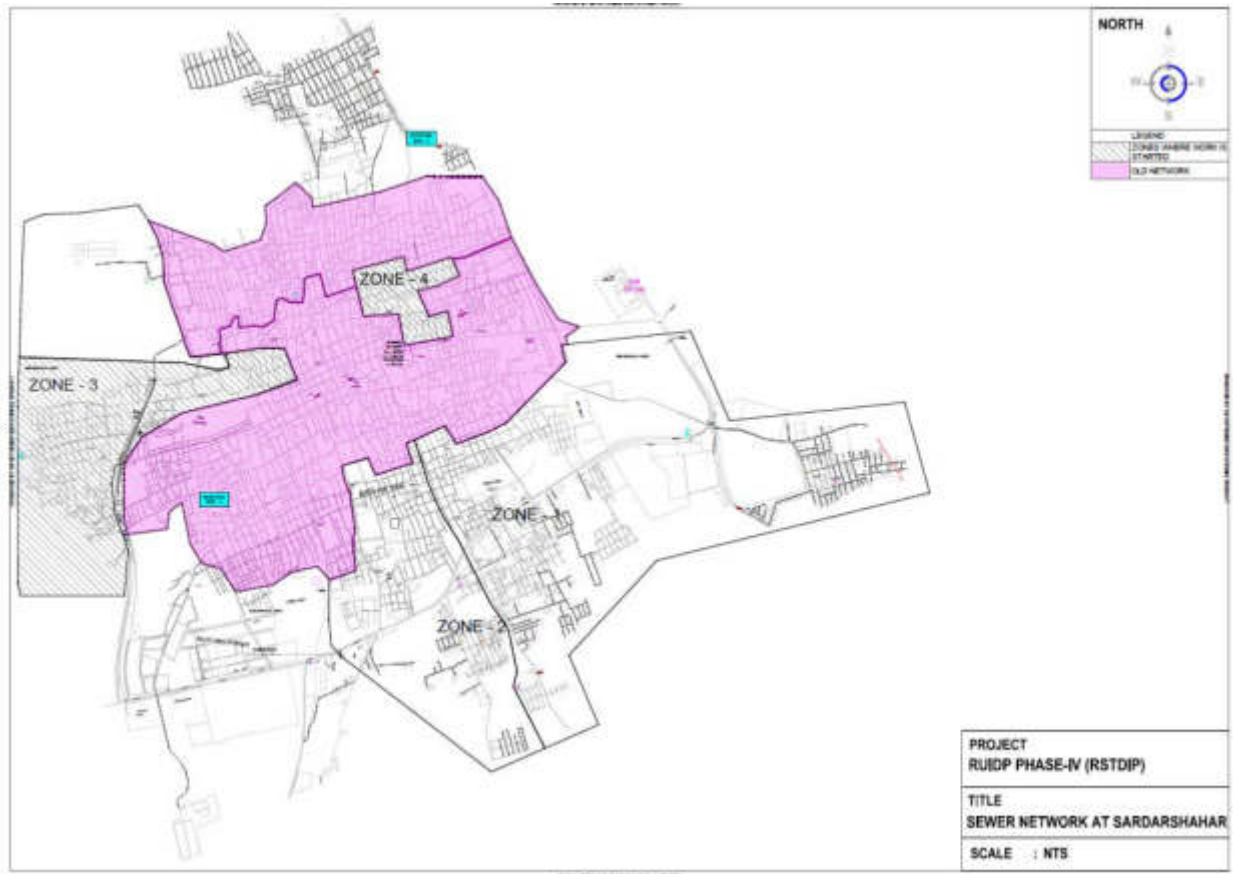

**Appendix 39: Update Alignment Maps for Water supply and Sewerage Network****Sewer Network Map showing approved Zones 3 and 4**

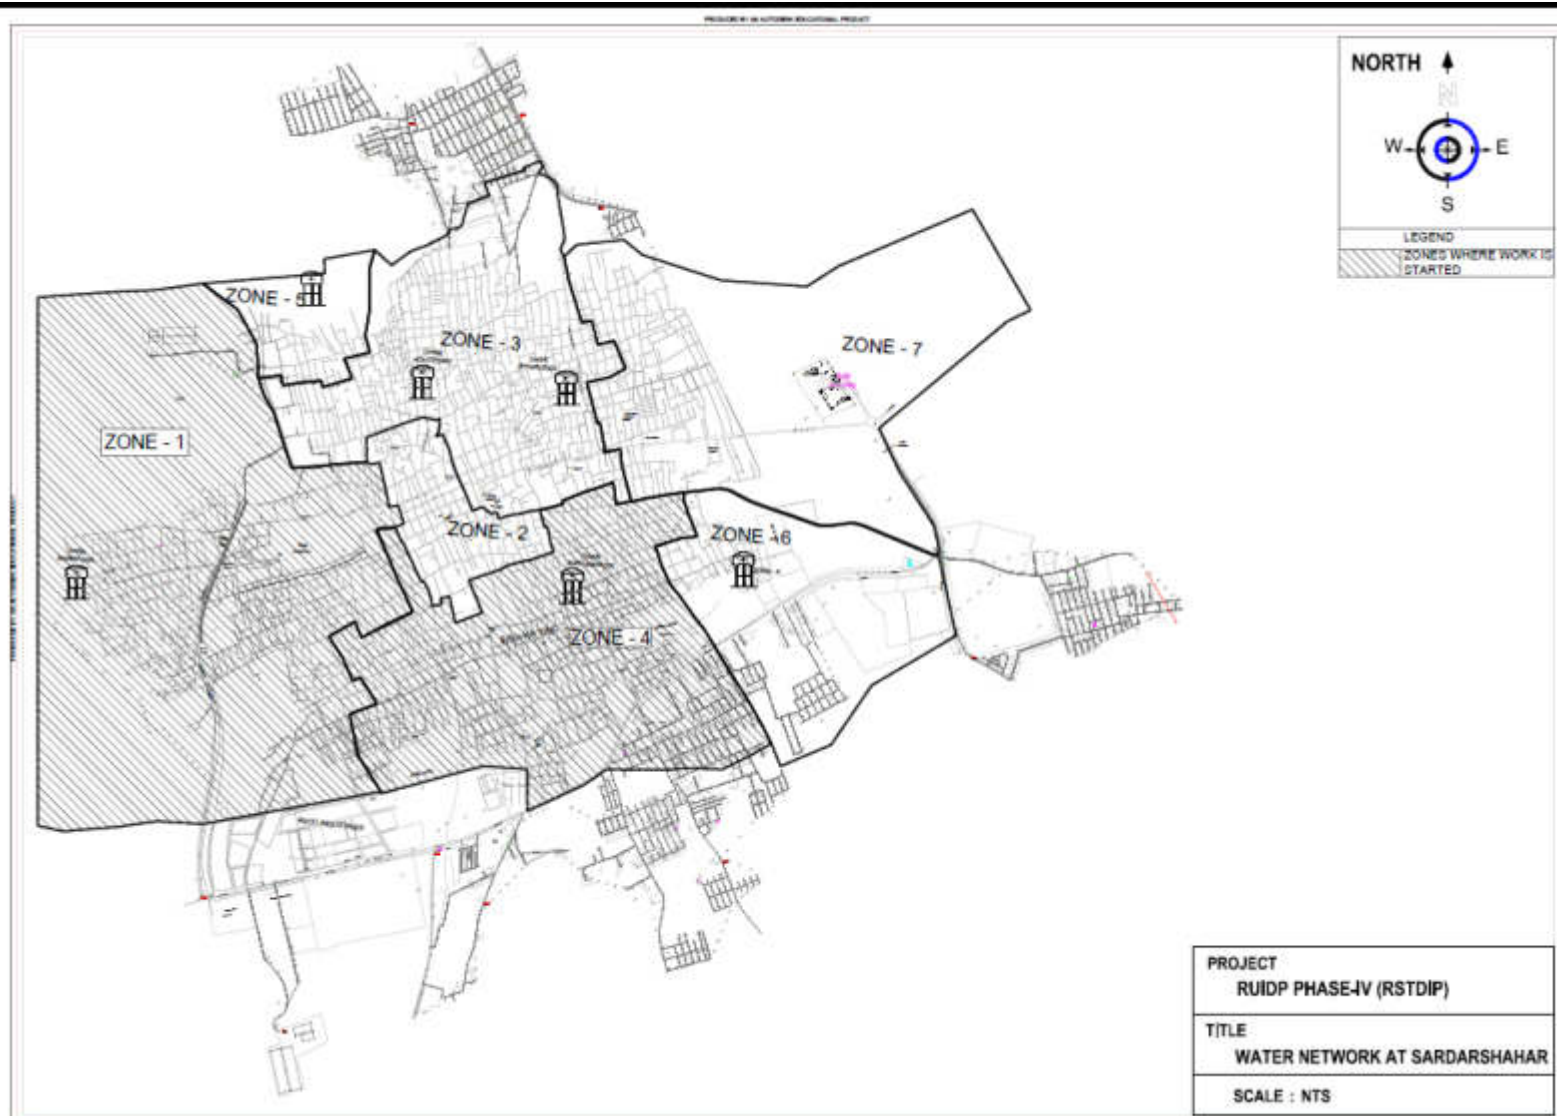

Water Supply Network Map showing approved Zones 1 and 4

**Appendix 40: Environmental Monitoring Results and Locations in Sardarshahar  
Ambient Air Quality Monitoring**

| Date of Monitoring                                                         | Locations                       | Results                    |                                         |                                         |                                          |                                           |
|----------------------------------------------------------------------------|---------------------------------|----------------------------|-----------------------------------------|-----------------------------------------|------------------------------------------|-------------------------------------------|
|                                                                            |                                 | CO<br>(mg/m <sup>3</sup> ) | NO <sub>2</sub><br>(mg/m <sup>3</sup> ) | SO <sub>2</sub><br>(mg/m <sup>3</sup> ) | PM <sub>10</sub><br>(mg/m <sup>3</sup> ) | PM <sub>2.5</sub><br>(mg/m <sup>3</sup> ) |
| 20.11.2020 to 21.11.2020                                                   | STP (2.30 MLD) South Campus     | 0.68                       | 20.70                                   | 12.79                                   | 77.35                                    | 30.67                                     |
| 23.11.2020 to 24.11.2020                                                   | STP (1.60MLD) near Ashok Circle | 0.89                       | 30.17                                   | 17.06                                   | 89.61                                    | 43.36                                     |
| 21.11.2020 to 22.11.2020                                                   | STP (3.4 MLD), North Campus     | 0.78                       | 21.36                                   | 12.62                                   | 80.43                                    | 32.57                                     |
| 22.11.2020 to 23.11.2020                                                   | SPS (0.65MLD), IGNP guest house | 0.78                       | 20.48                                   | 11.80                                   | 75.68                                    | 34.65                                     |
| 23.11.2020 to 24.11.2020                                                   | SPS (2.30MLD), Gaushala         | 0.68                       | 20.00                                   | 11.85                                   | 73.42                                    | 31.88                                     |
| 20.11.2020 to 21.11.2020                                                   | PHED campus, Hanumangarh Road   | 0.93                       | 29.87                                   | 15.95                                   | 88.29                                    | 38.28                                     |
| 21.11.2020 to 22.11.2020                                                   | Balaji Temple, Zone 4E          | 0.76                       | 18.55                                   | 10.35                                   | 76.31                                    | 30.98                                     |
| <b>India Ambient Air Quality Standard</b>                                  |                                 | 2,000 (8-hr)               | 40 (Annual)                             | 50 (Annual)                             | 60 (Annual)                              | 40 (Annual)                               |
|                                                                            |                                 | 4,000 (1-hr)               | 80 (24-hr)                              | 80 (24-hr)                              | 100 (24-hr)                              | 60 (24-hr)                                |
| <b>Applicable Per ADB SPS<sup>e</sup></b><br><br><b>(µg/m<sup>3</sup>)</b> |                                 | 2,000 (8-hr)               | 40 (Annual)                             | 50 (Annual)                             | 20 (Annual)                              | 10 (Annual)                               |
|                                                                            |                                 | 4,000 (1-hr)               | 80 (24-hr)                              | 20 (24-hr)                              | 50 (24-hr)                               | 25 (24-hr)                                |
|                                                                            |                                 | 100,000 (15-min)           | 200 (1-hr)                              | 500 (10-min)                            |                                          |                                           |

**Ambient Noise Level Monitoring**

| Date                     | Locations                       | Leq day time<br>dB(A) | Leq night time<br>dB(A) |
|--------------------------|---------------------------------|-----------------------|-------------------------|
| 20.11.2020 to 21.11.2020 | STP (2.30 MLD), South Campus    | 41.62                 | 37.42                   |
| 23.11.2020 to 24.11.2020 | STP (1.6MLD), near Ashok Circle | 55.79                 | 42.91                   |
| 21.11.2020 to 22.11.2020 | STP 3.40 MLD) North Campus      | 45.74                 | 38.29                   |
| 22.11.2020 to 23.11.2020 | SPS (0.65MLD) IGNP Guest House  | 52.54                 | 48.45                   |
| 23.11.2020 to            | SPS (2.3MLD),                   | 47.54                 | 39.36                   |

|                          |                     |       |       |
|--------------------------|---------------------|-------|-------|
| 24.11.2020               | Gaushala land       |       |       |
| 20.11.2020 to 21.11.2020 | PHED campus         | 49.97 | 45.35 |
| 21.11.2020 to 22.11.2020 | Tanki Balaji Temple | 51.53 | 41.82 |

**CPCB Limits for**

Industrial area (I): Day Time= 75 dB(A), Night Time (10 PM to 6 AM)= 70 dB(A)

Commercial (C) area: Day Time= 65 dB(A), Night Time (10 PM to 6 AM)= 55 dB(A)

Residential (R) area: Day Time= 55 dB(A), Night Time (10 PM to 6 AM)= 45 dB(A)

Silence Zone (S): Day Time= 50 dB(A), Night Time (10 PM to 6 AM)= 40 dB(A)

**IFC's limits for Noise Level**

Residential; institutional; educational - Day Time= 55 dB(A), Night Time (10 PM to 7 AM)= 45 dB(A)

Industrial area and commercial : Day Time= 70 dB(A), Night Time (10 PM to 7 AM)= 70 dB(A)

**Ground Water Quality Monitoring**

(Date of sampling 21 &amp; 22.11.2020)

| S.N. | Parameters                            | Units | Results                     |                                |                            |                                 |                                |                              |
|------|---------------------------------------|-------|-----------------------------|--------------------------------|----------------------------|---------------------------------|--------------------------------|------------------------------|
|      |                                       |       | STP (2.30 MLD) South Campus | PHED campus, Hanumang arh Road | STP (3.4 MLD) North Campus | SPS (0.65MLD), IGNP Guest House | STP 1.6 MLD, near Ashok circle | SPS (2.3MLD), Gaushal a land |
| 1    | pH                                    | -     | 8.1                         | 7.83                           | 7.92                       | 8.10                            | 7.86                           | 8.42                         |
| 2    | Total Dissolved Solids (TDS)          | mg/l  | 1327.00                     | 183.00                         | 211.00                     | 162.00                          | 242.00                         | 157.00                       |
| 3    | Total Hardness as CaCO <sub>3</sub>   | mg/l  | 542.62                      | 75.24                          | 91.08                      | 83.16                           | 102.96                         | 79.20                        |
| 4    | Total alkalinity as CaCO <sub>3</sub> | mg/l  | 565.60                      | 92.92                          | 101.00                     | 88.88                           | 76.76                          | 185.84                       |
| 5    | Chloride as Cl                        | mg/l  | 466.24                      | 44.68                          | 46.62                      | 38.85                           | 46.62                          | 40.80                        |
| 6    | Sulphate as SO <sub>4</sub>           | mg/l  | 155.41                      | 14.88                          | 15.71                      | 14.53                           | 16.55                          | 12.33                        |
| 7    | Calcium as Ca                         | mg/l  | -                           | -                              | -                          |                                 |                                |                              |
| 8    | Iron as Fe                            | mg/l  | 0.28                        | BDL                            | BDL                        | BDL                             | 0.11                           | BDL                          |
| 9    | Magnesium as Mg                       | mg/l  | -                           | -                              | -                          | -                               |                                |                              |
| 10   | Dissolved oxygen                      | mg/l  | 4.20                        | 4.40                           | 4.60                       | 3.90                            | 3.80                           | 5.20                         |
| 11   | Copper as Cu                          | mg/l  | BDL                         | BDL                            | BDL                        | BDL                             | BDL                            | BDL                          |
| 12   | Mangan                                | mg/l  | BDL                         | BDL                            | BDL                        | BDL                             | BDL                            | BDL                          |

| S.N. | Parameters                    | Units | Results                     |                               |                            |                                 |                                |                             |
|------|-------------------------------|-------|-----------------------------|-------------------------------|----------------------------|---------------------------------|--------------------------------|-----------------------------|
|      |                               |       | STP (2.30 MLD) South Campus | PHED campus, Hanumangarh Road | STP (3.4 MLD) North Campus | SPS (0.65MLD), IGNP Guest House | STP 1.6 MLD, near Ashok circle | SPS (2.3MLD), Gaushala land |
|      | Iron as Mn                    |       |                             |                               |                            |                                 |                                |                             |
| 13   | Chlorine (as Cl)              | mg/l  | -                           | -                             | -                          | -                               |                                |                             |
| 14   | Nickel as Ni                  | mg/l  | -                           | BDL                           | -                          |                                 |                                |                             |
| 15   | Lead (as Pb)                  | mg/l  | BDL                         | BDL                           | BDL                        | BDL                             | BDL                            | BDL                         |
| 16   | Arsenic (as As)               | mg/l  | BDL                         | BDL                           | BDL                        | BDL                             | BDL                            | BDL                         |
| 17   | Nitrate (as NO <sub>3</sub> ) | Mg/l  | 24.31                       | 6.63                          | 7.09                       | 5.81                            | 8.34                           |                             |
| 18   | Fluoride (as F)               | Mg/l  | 1.04                        | 0.22                          | 0.23                       | 0.21                            | 0.26                           | 0.24                        |
| 19   | Mercury (as Hg)               | Mg/l  | BDL                         | BDL                           | BDL                        | BDL                             | BDL                            | BDL                         |
| 20   | Phosphate (as P)              | Mg/l  | 0.26                        | BDL                           | BDL                        | BDL                             | BDL                            | BDL                         |

BDL= Below Detectable Limits

### Soil Quality Monitoring

Date of sampling- 23.11.2020

| S.No | Parameters                        | Units    | Results               |                       |                          |                                |                       |                       |
|------|-----------------------------------|----------|-----------------------|-----------------------|--------------------------|--------------------------------|-----------------------|-----------------------|
|      |                                   |          | STP (3.4MLD) North    | STP (2.3MLD) South    | STP 1.6 MLD Ashok circle | SPS (0.65MLD) IGNP Guest house | SPS (2.3 MLD)         | PHED pump house       |
| 1    | pH                                | -        | 8.42                  | 8.57                  | 8.32                     | 8.11                           | 8.26                  | 8.36                  |
| 2    | Electrical Conductivity (at 25°C) | mS/cm    | 0.384                 | 0.384                 | 0.385                    | 0.352                          | 0.468                 | 0.398                 |
| 3    | Calcium (as Ca)                   | mg/Kg    | 144.43                | 119.04                | 146.02                   | 130.15                         | 149.2                 | 142.85                |
| 4    | Sodium (as Na)                    | mg/Kg    | 140.73                | 136.22                | 151.81                   | 136.54                         | 154.7                 | 143.62                |
| 5    | Potassium (as K)                  | Kg/hect. | 135.9                 | 122.23                | 125.6                    | 124.23                         | 140.32                | 132.2                 |
| 6    | Organic Carbon                    | %        | 0.55                  | 0.51                  | 0.57                     | 0.52                           | 0.56                  | 0.56                  |
| 7    | Magnesium (as Mg)                 | mg/Kg    | 107.3                 | 93.82                 | 116.0                    | 89.5                           | 118.84                | 113.1                 |
| 8    | Total Kjeldhal Nitrogen (as TKN)  | mg/Kg    | 368.4                 | 349.82                | 429.0                    | 307.81                         | 383.2                 | 381.43                |
| 9    | Permeability                      | Cm/sec   | 1.68*10 <sup>-6</sup> | 1.68*10 <sup>-6</sup> | 1.35*10 <sup>-6</sup>    | 1.32*10 <sup>-6</sup>          | 1.45*10 <sup>-6</sup> | 1.25*10 <sup>-6</sup> |

|    |                                 |          | 5          | 4          | .3         |            | .3         | 0*.4       |
|----|---------------------------------|----------|------------|------------|------------|------------|------------|------------|
| 10 | Moisture Content                | %        | 4.86       | 2.32       | 2.63       | 2.17       | 3.47       | 4.4        |
| 11 | Phosphate (as PO <sub>4</sub> ) | Kg/hect. | 23.42      | 22.91      | 27.1       | 21.51      | 24.01      | 26.2       |
| 12 | Soil texture                    | -        | Sandy loam | Sandy loam | Sandy loam | Sandy loam | Sandy loam | Sandy loam |
| 13 | Oil and grease                  | Mg/kg    | 11.78      | 14.74      | 15.92      | 9.92       | 8.93       | 12.83      |

### Monitoring Locations in Sardarshahar town in Google Map



### SAUW IEE Review - Information Log

**Instructions:** Provide information based on IEE submitted by Project Management Unit (PMU). This IEE log sheet will serve as record of the review findings, comments, and/or further actions required during implementation. A copy of the IEE log sheet should be (i) provided to PMU for their record and guidance on actions during implementation; (ii) attached in the cleared IEE to be disclosed; (iii) used as reference for review of updated/final IEE and (iv) inputted in the SARD Safeguards Compliance Tracking System.

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                            |               |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|---------------|
| <b>Project:</b>          | IND: Rajasthan Secondary Towns Development Investment Program (RSTDIP) - Sewerage System and Water Supply Project in Sardarshahar town, Churu district, Rajasthan                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                            |               |
| <b>Loan No.:</b>         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>Package No.:</b>                                                                                                        | RSTDIP/SRD/01 |
| <b>Components:</b>       | <p>Water Supply</p> <p>(i) Construction of new CWR of 2400 KL and Clear Water Pump House at Hanumangarh Road H/w,</p> <p>(ii) Rehabilitation of OHSRs at Bairudan, Holidhora, Suryamandir, &amp; Ramnagar,</p> <p>(iii) Rehabilitation of CWR of 4100 KL and Clear Water Pump House at Hanumangarh Road Headworks ,</p> <p>(v) water supply pipe for distribution networks- 193 Kms of different diameters and pipe materials: DI &amp; HDPE</p> <p>(vi) Construction of Consumer Relation and Management Centre- 2 nos., Central Control Centre- 1 no. and Master Control Centre- 1 no</p> <p>(vii) Consumer Connections- 22000</p> <p>(viii) Rehabilitation of existing 26 tube/open wells.</p> <p>Sewerage</p> <p>(i) Construction of 3 STPs of 2.30 MLD, 3.40 MLD &amp; 1.60 MLD capacities with Treated Effluent Elevated Reservoir (TEER) and Up-gradation of existing (WSP) STP's of Capacities 5 MLD and 2 MLD, Treated Effluent Storage Reservoir (TESR), Effluent Pumping Station (EPS) for reuse of treated effluent</p> <p>(ii) 2 nos. of SPSs (0.65 MLD and 2.30 MLD capacity)</p> <p>(iii) Rising main- 2.1 Km (800 mt. For SPS of 200 mm DI K9 pipes and 1300 mt. For SPS of 350 mm DI K9 pipes)</p> <p>(iv) Sewer network of 68 km including 12.00 Km trenchless laying</p> <p>(v) Electrical and Mechanical works (vi) house sewer connections- 5600</p> <p>(vii) FSSM one mobile tankers with suction and discharge arrangements with 1000 litre capacity and one with 4000 litre capacity</p> |                                                                                                                            |               |
| <b>3- Contract Type:</b> | Design – Build - Operate                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                            |               |
| <b>Date of IEE:</b>      | December 2020                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                            |               |
| <b>Draft IEE</b>         | <b>Updated/Revised IEE</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>Others</b>                                                                                                              |               |
|                          | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Updated IEE submitted for disclosure at PMU and ADB websites after revision in original scope of work before start of work |               |

| Sl. No | Activity | Status | Comments<br>(include date accomplished or obtained, if applicable) |
|--------|----------|--------|--------------------------------------------------------------------|
|--------|----------|--------|--------------------------------------------------------------------|



| Sl. No | Activity                                                                                                                   | Status |                                      | Comments<br>(include date accomplished or obtained, if applicable)                                                                                                                                                                                                                                                                                                                                       |
|--------|----------------------------------------------------------------------------------------------------------------------------|--------|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        |                                                                                                                            | Yes    | No                                   |                                                                                                                                                                                                                                                                                                                                                                                                          |
| 1.     | Environmental assessment has been satisfactorily conducted based on ADB REA Checklist and scoping checklist. <sup>50</sup> | ✓      |                                      | This Updated IEE covers the impact on construction of Improvement of Water Supply and Sewerage works in Sardarshahar town of North Indian state of Rajasthan. This is the first updated IEE, and reflects the updated designs of the subproject components                                                                                                                                               |
| 2.     | Environmental assessment based on latest project components and design                                                     |        | ✓                                    | The environmental assessment is based on preliminary design as per bid documents and part of design being updated by DBO contractor.<br><br><b>Further action/s:</b> The environmental assessment will be updated again based on detailed completed engineering design.                                                                                                                                  |
| 3.     | Statutory Requirements <sup>51</sup>                                                                                       |        | Forest Clearance                     | Not applicable.                                                                                                                                                                                                                                                                                                                                                                                          |
|        |                                                                                                                            |        | No Objection Certificate             | No other environment related NOC is required                                                                                                                                                                                                                                                                                                                                                             |
|        |                                                                                                                            |        | Site Location Clearance              | Not applicable.                                                                                                                                                                                                                                                                                                                                                                                          |
|        |                                                                                                                            |        | Environmental Compliance Certificate | Not applicable. The components are not listed in the Schedule 1 of the EIA Notification Act and its rules and regulations                                                                                                                                                                                                                                                                                |
|        |                                                                                                                            | ✓      | Permit to Construct (or equivalent)  | <b><u>Consent to Establish from RSPCB</u></b> for construction of 3 STPs with SBR Technology and upgradation of existing 2 is required.<br><b>Further action/s:</b> The contractor under the supervision of PIU will obtain the Consent to <b><u>Establish</u></b> after award of contract from the RSPCB.<br>The application be filed at RSPCB before mobilisation/installation of instruments at site. |
|        |                                                                                                                            | ✓      | Permit to Operate (or equivalent)    | The followings will require Consent to <b><u>Operate from RSPCB:</u></b><br><br>1. Before operation of all STPs<br>2. (a) diesel generators; and<br>(b) hot mix plants, wet mix plants, stone crushers, etc (if                                                                                                                                                                                          |

<sup>50</sup> ADB Rapid Environmental Assessment Checklist for screening and categorization. Scoping Checklist ("No Mitigation Scenario" Checklist) for scope of IEE, identification of impacts and development of environmental management plan.

<sup>51</sup> If applicable, Include date accomplished or obtained.



| Sl. No | Activity                                                  | Status               |                                                      | Comments<br>(include date accomplished or obtained, if applicable)                                                                                                                                                                                                           |    |                                                                                                                                                                                                                                                                                                                                                       |
|--------|-----------------------------------------------------------|----------------------|------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        |                                                           |                      |                                                      | installed for construction)<br><br><b>Further action/s:</b> The contractor under the supervision of PIU will obtain the Permit to Operate before operation of facility.                                                                                                      |    |                                                                                                                                                                                                                                                                                                                                                       |
|        |                                                           |                      | Permit for water abstraction and intake construction | Not Applicable<br>Water from Sahwa Lift Canal is allocated for Sardashahar<br>Water from existing borewells will use to meet extra demand.                                                                                                                                   |    |                                                                                                                                                                                                                                                                                                                                                       |
|        |                                                           |                      | Others                                               | PIU will obtain the Tree-felling Permission from Forest/Revenue Department. The application will be filed once detailed design is completed. The replacement ratio for trees is 1:3 as per RUIDP policy.                                                                     |    |                                                                                                                                                                                                                                                                                                                                                       |
| 5.     | Policy, legal, and administrative framework               | Adequate<br>✓        |                                                      | The updated IEE includes discussions on applicable policy, acts and rules. Obtaining the required permits and NOC is the responsibility of PMU/PIU.                                                                                                                          |    |                                                                                                                                                                                                                                                                                                                                                       |
|        |                                                           | Not Adequate         |                                                      |                                                                                                                                                                                                                                                                              |    |                                                                                                                                                                                                                                                                                                                                                       |
|        |                                                           | Frameworks included: |                                                      | The updated IEE also confirmed that international best practices (specified in EHS Guidelines) have been incorporated in the preliminary design.<br><br><b>Further action/s:</b> Any condition in the permits/NOC will be incorporated in the final IEE and contractor SEMP. |    |                                                                                                                                                                                                                                                                                                                                                       |
|        |                                                           | ✓                    | National regulation/law on EIA                       |                                                                                                                                                                                                                                                                              |    |                                                                                                                                                                                                                                                                                                                                                       |
|        |                                                           | ✓                    | Environmental agency                                 |                                                                                                                                                                                                                                                                              |    |                                                                                                                                                                                                                                                                                                                                                       |
|        |                                                           | ✓                    | Relevant international environmental agreements      |                                                                                                                                                                                                                                                                              |    |                                                                                                                                                                                                                                                                                                                                                       |
| ✓      | Environmental standards (IFC's EHS Guidelines)            |                      |                                                      |                                                                                                                                                                                                                                                                              |    |                                                                                                                                                                                                                                                                                                                                                       |
| 6.     | Anticipated environmental impacts and mitigation measures | Impacts and risks:   |                                                      | Mitigation Measures:                                                                                                                                                                                                                                                         |    |                                                                                                                                                                                                                                                                                                                                                       |
|        |                                                           |                      |                                                      | Yes                                                                                                                                                                                                                                                                          | No |                                                                                                                                                                                                                                                                                                                                                       |
|        |                                                           |                      | Biodiversity conservation                            | ✓                                                                                                                                                                                                                                                                            |    | The Biodiversity Assessment Study Report for the subproject is carried out and detailed report with recommendation is attached in IEE<br><br><b>Action Required:</b> Update the draft biodiversity assessment report in next update of IEE.                                                                                                           |
|        |                                                           |                      | Pollution prevention and abatement                   | ✓                                                                                                                                                                                                                                                                            |    | The updated IEE confirms that international best practices (specified in EHS Guidelines) have been incorporated in the design.<br><br>IEE also ensures that sludge management protocols are compliant with environmental regulations (Solid Waste Management Rules 2000 and its amendments) should be prepared and solid waste disposal should have a |
|        |                                                           |                      |                                                      |                                                                                                                                                                                                                                                                              |    |                                                                                                                                                                                                                                                                                                                                                       |

| Sl. No | Activity                                               | Status    |                                 |      |                                                                                   | Comments<br>(include date accomplished or obtained, if applicable)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------|--------------------------------------------------------|-----------|---------------------------------|------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        |                                                        |           |                                 |      |                                                                                   | designated site (dumping on vacant lot is not allowed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|        |                                                        |           | Health and safety               | ✓    |                                                                                   | The Updated IEE and EMP includes Health and safety mitigation measures and requirements to be followed by DBO contractor.<br><br>Draft asbestos management plan with recommendation is also attached with the report<br><b>Further action/s:</b> The contractor is required to<br>(i) designate a EHS Engineer; (ii) develop and implement a Health and Safety Plan;<br>(iii) follow the mitigation measures in the EMP; and<br>(iv) if required, expand in the SEMP the mitigation measures as appropriate in the site conditions.<br>Draft asbestos management plan required to be updated in next update of IEE |
|        |                                                        |           | Physical and cultural resources |      | ✓                                                                                 | Not applicable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|        |                                                        |           | Cumulative impacts              |      | ✓                                                                                 | Not applicable. There are no other on-going or planned projects that may cause negative cumulative impacts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|        |                                                        |           | Transboundary impacts           |      | ✓                                                                                 | Not applicable. The subproject/package is relatively small-scale in nature to have potential Trans boundary impacts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|        |                                                        |           |                                 |      |                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 7.     | Impacts from Associated Facilities <sup>52</sup>       | Addressed | Not Addressed                   | None | Not applicable. There are no associated facilities under this subproject/package. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|        |                                                        |           |                                 | ✓    |                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 8.     | Analysis of Alternatives                               | Yes       |                                 | No   |                                                                                   | Section on Analysis of Alternatives included in the updated IEE.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|        |                                                        | ✓         |                                 |      |                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 9.     | EMP budget included                                    | Yes       |                                 | No   |                                                                                   | The indicative cost of EMP for Package is INR 31,328,464. The bid documents include BOQ item for items related to EMP implementation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|        |                                                        | ✓         |                                 |      |                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 10.    | EMP implementation integrated in PAM and bid documents | Yes       |                                 | No   |                                                                                   | (i) The draft Project Administration Manual included sections on environmental safeguards. Information in the PAM has been considered in the preparation of the draft IEE.<br>(ii) The EARF also provided detailed                                                                                                                                                                                                                                                                                                                                                                                                 |
|        |                                                        | ✓         |                                 |      |                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

<sup>52</sup> ADB SPS (Appendix 1 para 6) defines associated facilities as not funded as part of the project (funding may be provided separately by the borrower/client or by third parties), and whose viability and existence depend exclusively on the project and whose goods or services are essential for successful operation of the project.

| Sl. No | Activity                       | Status                               |                                                                                                         | Comments<br>(include date accomplished or obtained, if applicable)                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------|--------------------------------|--------------------------------------|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        |                                |                                      |                                                                                                         | requirements on EMP implementation. These are included in the IEE.<br>(iii) The draft IEE (cleared by ADB) was included in the contract documents and was provided to the contractor.                                                                                                                                                                                                                                                                                                                        |
| 11.    | Consultation and Participation | Yes                                  | No                                                                                                      | Meaningful consultations were done with Government officials, women and residents of Sardarshahar town in August 2018. Informal and formal consultations at sites were also conducted during SIA in Sardarshahar on 28 August 2018.<br><br><b>Further action/s:</b> Meaningful consultations with stakeholders and affected people will be conducted by PIU / CAPPCC during detailed engineering design and monthly frequency during construction,                                                           |
|        |                                | ✓                                    |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 12.    | Grievance Redress Mechanism    | Yes                                  | No                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|        |                                | ✓                                    |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|        |                                | Description of GRM                   |                                                                                                         | Included in section VIII of IEE                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|        |                                | Yes                                  |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|        |                                | Identification of GRC members        |                                                                                                         | Details are provided in section VIII and office order for GRM                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|        |                                | Yes                                  |                                                                                                         | Yes, Details are provided in office order for GRM                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|        |                                | <b>GRM established and notified?</b> |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|        |                                | Yes                                  |                                                                                                         | Office order included in the updated IEE, Appendix 28                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 13.    | Disclosure                     |                                      | Endorsement to disclose on ADB website                                                                  | Endorsement to disclose draft IEE on ADB website was already done. Upon approval from ADB, PMU will endorse to disclose the updated IEE.                                                                                                                                                                                                                                                                                                                                                                     |
|        |                                |                                      | Disclosed on project website                                                                            | The Draft IEE was disclosed, and this updated IEE will also be disclosed to ADB and RUDSICO websites Upon approval from ADB and PMU.                                                                                                                                                                                                                                                                                                                                                                         |
|        |                                |                                      | Relevant information available to stakeholders and affected people in language and form they understand | A town-level City Level Committee (CLC) has been formed in Churu district by Government orders. City Level Committee meeting was organized during the detailed design stage to which representatives of primary and secondary stakeholders were invited. City stakeholder committee meeting was organized in district headquarter Churu on dtd. 13.07.2018 to discuss the matter of proposed water supply and sewerage works in Sardarshahar under the chairmanship of District Collector, Churu in presence |

| Sl. No | Activity                                                                                                                                                      | Status   |    | Comments<br>(include date accomplished or obtained, if applicable)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        |                                                                                                                                                               |          |    | <p>of public representatives, consultants, RUIDP officials, PHED/ Municipal officials, NGOs and other invitee members. Proposed scope of works and technology was discussed in the meeting. Land availability for the proposed components was also confirmed by local authority.</p> <p>Pamphlets in English and local languages were distributed to the participants, describing the need and benefits provided by the project.</p> <p><b>Further action/s:</b> Information sharing will be continued, recorded, and reported in the monitoring report during implementation</p> |
| 14.    | Mobilized PMU Environment Specialist                                                                                                                          | Yes<br>✓ | No | Mr. Vijay Choudhary., PO, Environment, PMU and Mr. Rohit Jangid, APO, Environment, PMU                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 15.    | Mobilized PIU Environment Specialist                                                                                                                          | Yes<br>✓ | No | Mr. Surendra Godra J.E                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 16.    | Mobilized Environment Specialist at PMU level                                                                                                                 | Yes<br>✓ | No | Mr. Abhay Srivastava, Environmental Safeguard Specialist, PMCBC and Ms. Priya Goyal, Environmental Safeguard Support, PMCBC                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 17.    | Mobilized Environment Specialist at PIU level                                                                                                                 | Yes<br>✓ | No | Mr. Mahaveer Prasad Saini, Environment Health and Safety Professional and Mr Mahesh Verma, Environmental Safeguard Support                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 18.    | Confirm bid and contract documents and/or EMP include requirement for the contractor to appoint EHS supervisor and/or nodal person for environment safeguards | Yes<br>✓ | No |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 19.    | If contract awarded already, confirm contractor's appointment of EHS supervisor and/or nodal person for environmental safeguards                              | Yes<br>✓ | No | Mr. Rakesh Sahu, EHS officer, L&T, Sardarshahar, 9439466674<br><a href="mailto:rakeshkumarsahu@Intecc.com">rakeshkumarsahu@Intecc.com</a><br><a href="mailto:rakeshsahu330@gmail.com">rakeshsahu330@gmail.com</a>                                                                                                                                                                                                                                                                                                                                                                 |
| 20.    | Awareness training on compliance to safeguard requirements                                                                                                    | Yes<br>✓ | No | <p>The indicative training program is included in IEE</p> <p><b>Further action/s:</b> The final IEE will include detailed training program to be provided by the PMCBC. The over-all</p>                                                                                                                                                                                                                                                                                                                                                                                          |

| Sl. No | Activity                                                  | Status                                                                                                                                                                                                                                                                                                                                                                            |    | Comments<br>(include date accomplished or obtained, if applicable)                                         |
|--------|-----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|------------------------------------------------------------------------------------------------------------|
|        |                                                           |                                                                                                                                                                                                                                                                                                                                                                                   |    | Environmental Training Program will be submitted in the first semi-annual environmental monitoring report. |
| 21     | Monitoring and Reporting                                  | YES                                                                                                                                                                                                                                                                                                                                                                               | No |                                                                                                            |
|        |                                                           |                                                                                                                                                                                                                                                                                                                                                                                   |    | Detailed in the EARF and the updated IEE.                                                                  |
| 22.    | Others/Remarks                                            | <ul style="list-style-type: none"> <li>Asbestos management plan to be updated before start of any construction activity in network area having asbestos pipeline or in sites having old asbestos pipe storage.</li> <li>Similarly, biodiversity plan to be updated in next update of IEE</li> <li>The PMU to finalize and approve the SEMP Submitted by the contractor</li> </ul> |    |                                                                                                            |
|        | Prepared by: <i>(name, designation and date)</i>          | Govind Singh Rathore, Safeguard Consultant dated, August 26, 2021                                                                                                                                                                                                                                                                                                                 |    |                                                                                                            |
|        | Noted and Checked By: <i>(name, designation and date)</i> |                                                                                                                                                                                                                                                                                                                                                                                   |    |                                                                                                            |
|        | Documents/References:                                     | Updated IEE of December 2020, submitted in January 2021 and revised submission on 02 June 2021 and 24 August 2021                                                                                                                                                                                                                                                                 |    |                                                                                                            |